
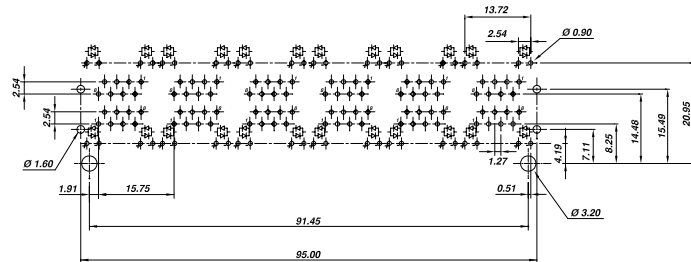
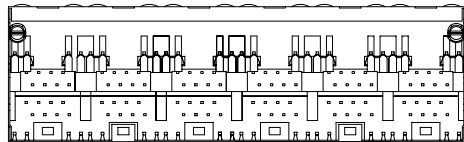



RoHS Compliant

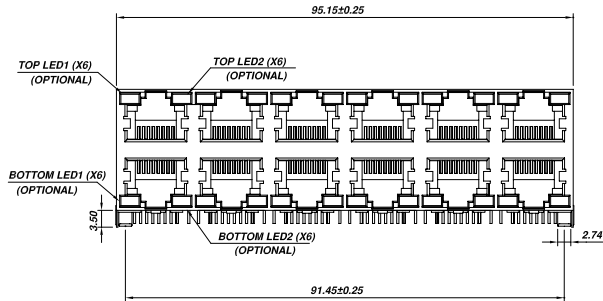

PC Layout
(Top View)

LED Designation :					
Code	Forward	Reverse	Code	Forward	Reverse
G	Green	—	4	Yellow	Red
Y	Yellow	—	5	Green	Yellow
R	Red	—	6	Yellow	Green
O	Orange	—	9	Red	Green
3	Green	Red	0	Red	Yellow

SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
- Contact Resistance : 30milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 150V AC.
- Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

2. Physical char.

- Housing (Option) : For Waving Soldering Process
- PBT Glass Filled (UL 94V-0), Soldering Temperature: 245°C for 5 Sec.
- Nylon (UL 94V-0), Soldering Temperature: 260°C for 5 Sec.
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 750 Mating cycles Min.

AJ-091-26-F-XX-N1-XX

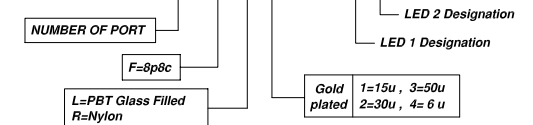

ALLSUN CORPORATION

9FL,NO.292 SEC.7 CHENG TEH ROAD.TAIPEI TAIWAN.
E - mail Address : allsun@globalsources.com

TITLE **RJ45 2X6 8 POSITIONS**
DOUBLE DECK GANG SHIELDED JACK WITW LED
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-091-26-F-XX-N1-XX

SCALE SIZE DWG. NO. 9795 SERIES

DWG. NO.

AST091A10-1

NOT SCALED
DRAWING

TOLERANCE UNLESS
OTHERWISE NOTICE

INCH

MM

DR.

DATE

Steven

MAY-31 '13

CK'D

Johnn

MAY-31 '13

APP'D

Billy

MAY-31 '13

THIRD ANGLE PROJECTION

LINEAR $\frac{MM}{INCH}$

.00±0.01
.000±0.005
.0000±0.002

.00±0.25
.000±0.13
.0000±0.05

ANGLE +0° 30'

RADII

+0.45
-0.15