

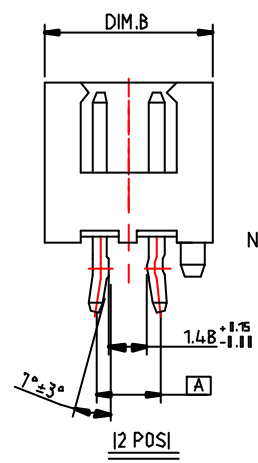
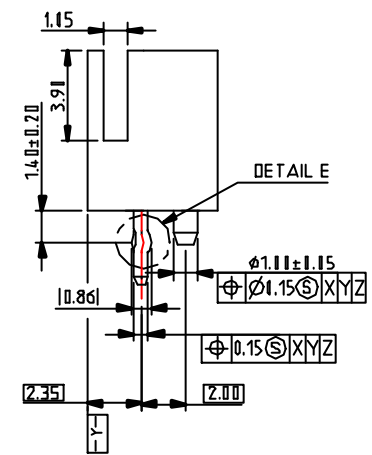
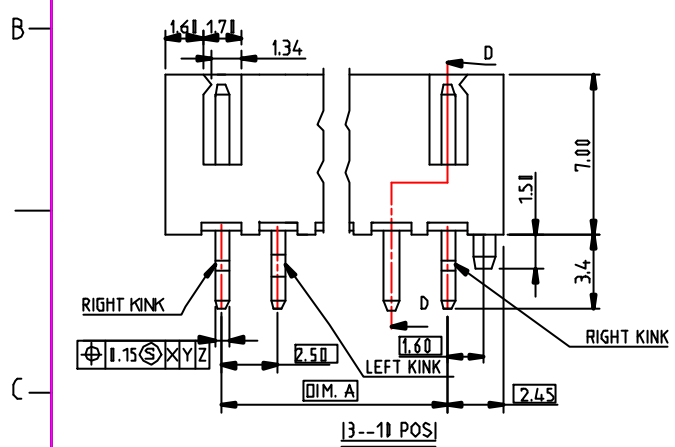

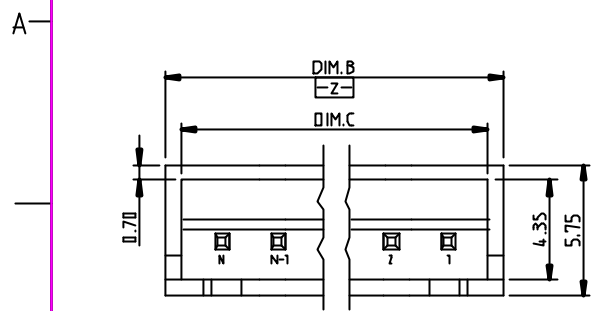


F201-11-x-	10	22.51	27.40	26.10	REV	ECN. NO.	APPD.
F201-09-x-	9	20.01	24.91	23.50	A	DC14130	T.K MENG 8/7/2014
F201-08-x-	8	17.51	22.40	21.01			
F201-07-x-	7	15.10	19.90	18.50			
F201-06-x-	6	12.51	17.41	16.10			
F201-05-x-	5	11.10	14.91	13.50			
F201-04-x-	4	7.50	12.41	11.01			
F201-03-x-	3	5.10	9.90	8.50			
F201-02-x-	2	2.50	7.41	6.01			
PROD.NO.	NO.DF POS.	DIM.A	DIM.B	DIM.C			



NOTES:
 1. DRAWING SHALL BE INTERPRETED PER ANSI Y14.5M-1994
 2. ALL DIMENSIONS ARE IN MILLIMETER
 3. CONTACT RETENTION FORCE: 1.01 kgf MIN.
 4. PRODUCT NO. MATRIX:
 F200- NN - N -NN
 MODIFICATION CODE
 NONE=NO POST
 G1=WITH POST
 PLATING OPTION
 1=50 u"MIN. NICKELBASE PLATING
 110 u"MIN. TIN/LEAD PLATING OVER ALL
 2=GOLD FLASH ALL
 8=15 u" GOLD OVER CONTACT AREA
 NO. OF POS.
 5. OPERATION TEMPERATURE : -45°C-105°C

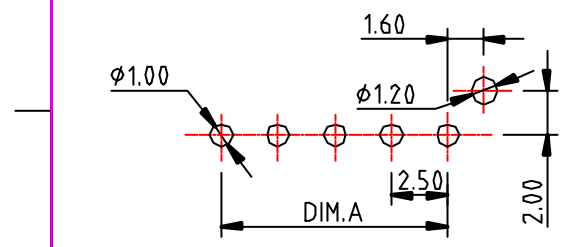

ITEM	Q'TY	DESCRIPTION
②	ND. DF POS.	CONTACT, BRASS
①	1	HOUSING, NYLON 6.6 COLOR WHITE

COMPONENT PARTS LIST

X.±	.X± 1.38	.XX± 1.25	NAME<INTENDED USE> HDR., POLARIZING WALL .198" PITCH, .125" SD.	CTL CHATRON INCORPORATION
X°.±	.X°.±	.XX°.±	PART NO.<INTENDED USE> F201 SERIES	
UNITS: mm	DATE: 8/1/2014		TITLE: CUSTOMER DRAWING	
MAT'L			APPD: T.K MENG DWG NO. 010-0002-143	
			CHKD: GUOCHAO YAN	SCALE SHEET REV N/A 1/1 A
			DR: LIU XIAO YE	