


REV	ECN. NO.	APPD.
A	DC04-055	T.K MENG 8/1/2004

NOTE: UNLESS OTHERWISE SPECIFIED
 1. OPERATION TEMPERATURE : -40°C - 115°C
 2. CONNECTOR ACCEPTS BATTERY #CR2032
 3. PRODUCT NO. MATRIX:

B300-x
 CONTACT AREA PLATING
 1-111u" MIN. TIN PLATED OVER NICKEL

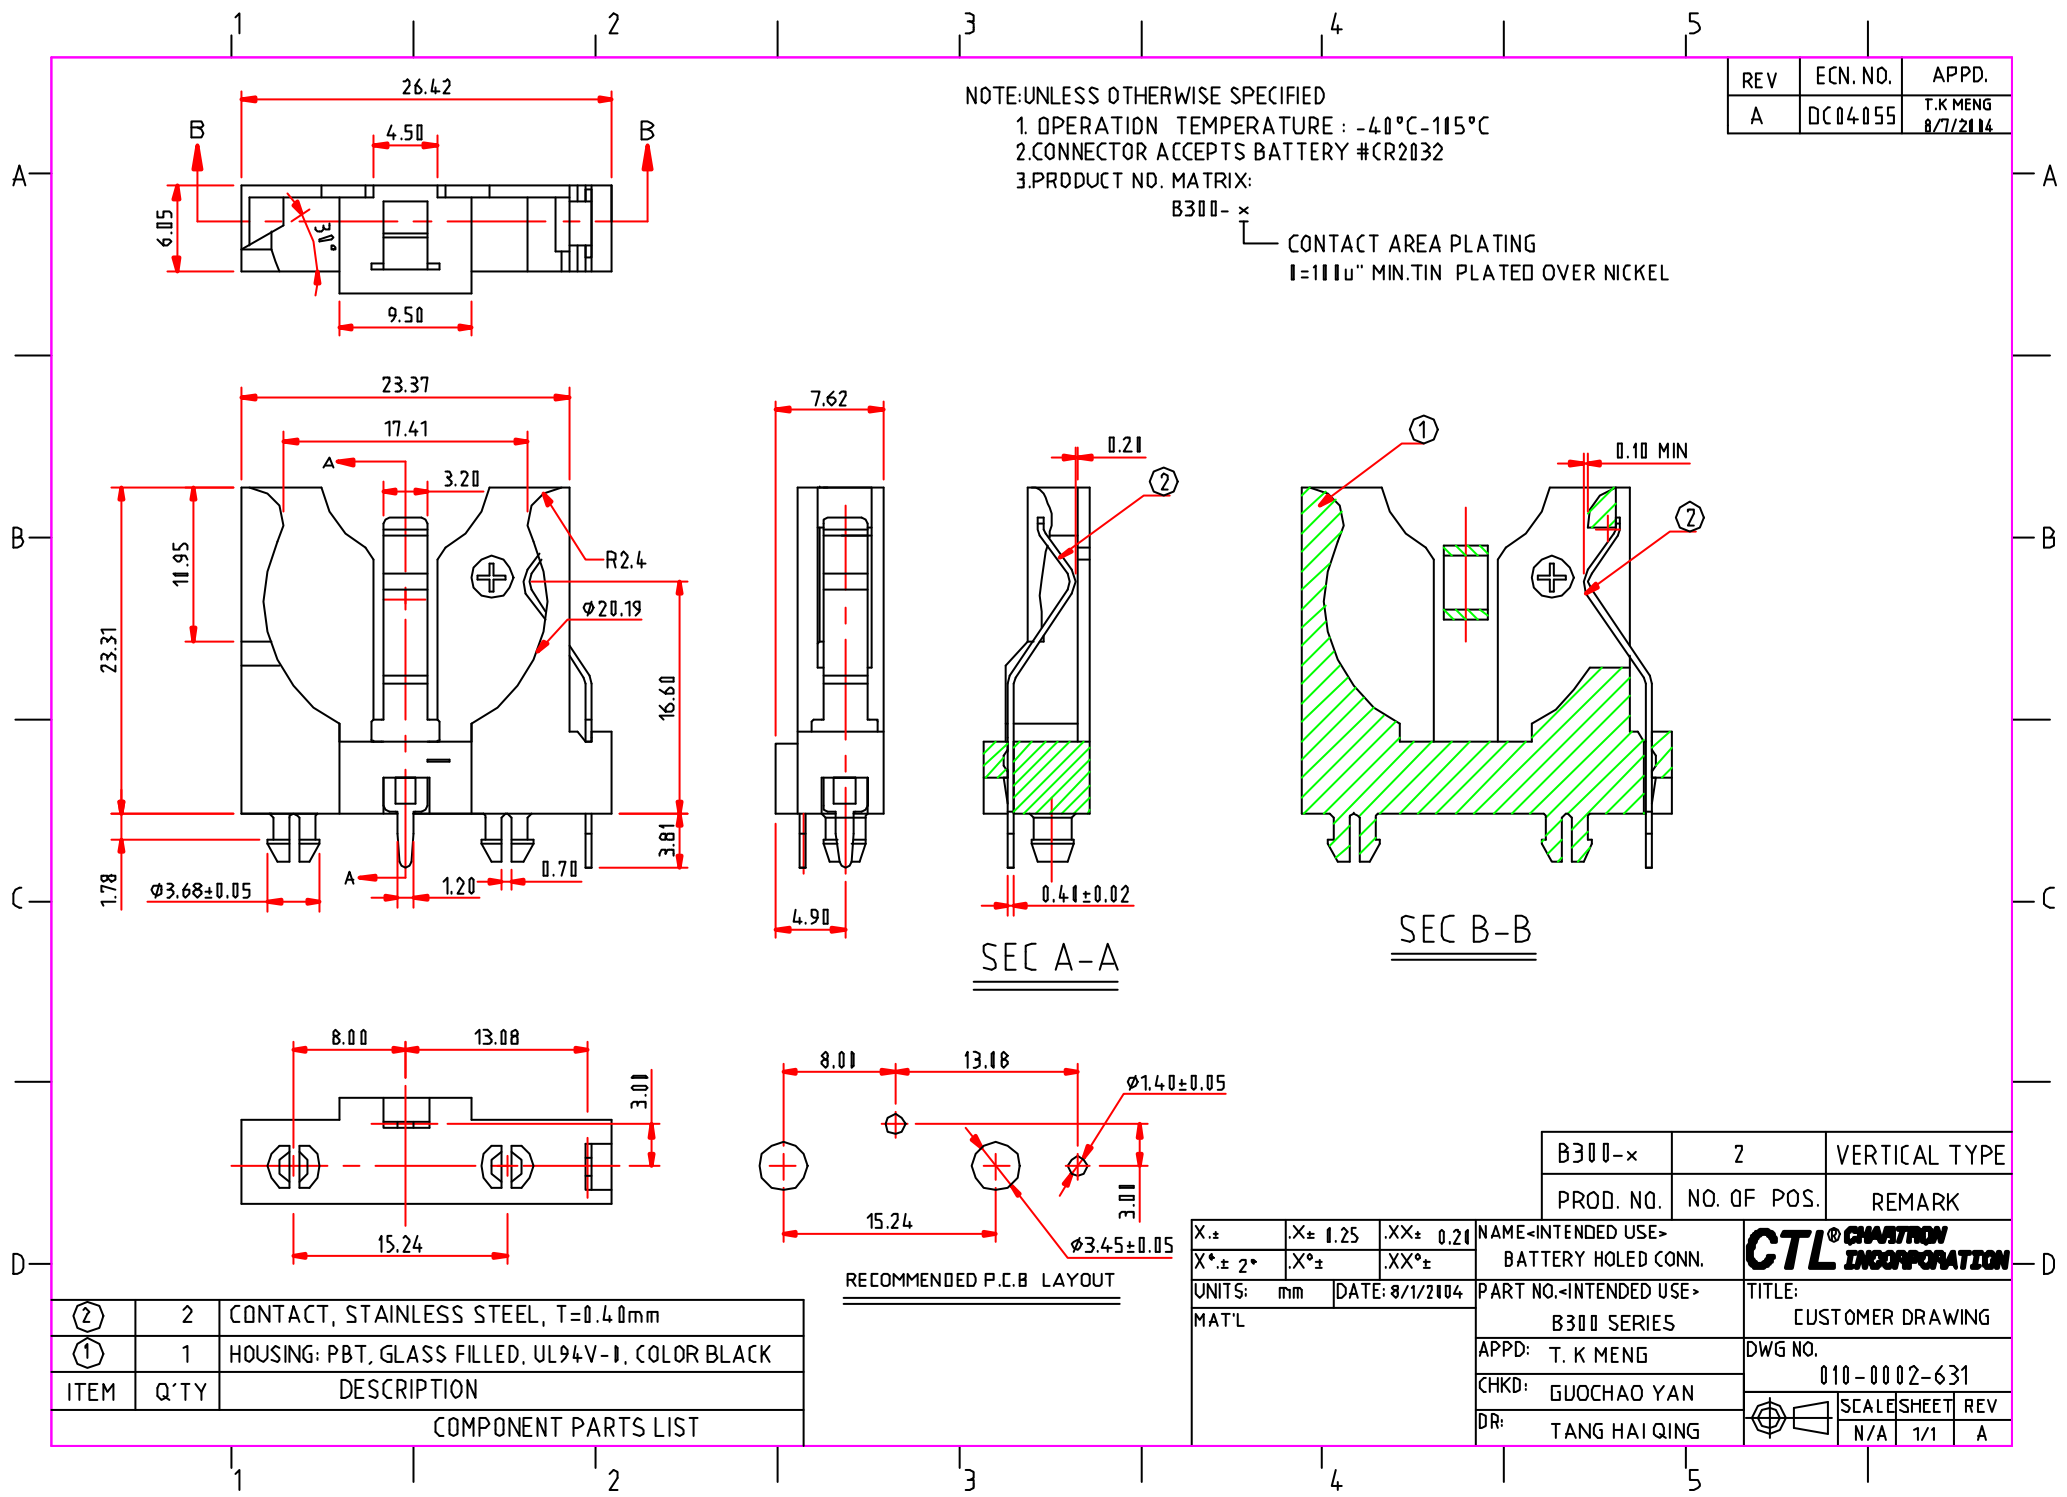

ITEM	Q'TY	DESCRIPTION
②	2	CONTACT, STAINLESS STEEL, T=0.40mm
①	1	HOUSING: PBT, GLASS FILLED, UL94V-0, COLOR BLACK

COMPONENT PARTS LIST

B300-x	2	VERTICAL TYPE
PROD. NO.	NO. OF POS.	REMARK
NAME-INTENDED USE-> BATTERY HOLED CONN.		CTL CHATRON INCORPORATION TITLE: CUSTOMER DRAWING DWG NO. 010-0002-631 SCALE SHEET REV N/A 1/1 A
PART NO.-INTENDED USE-> B300 SERIES		
APPD: T. K MENG		
CHKD: GUOCHAO YAN		
DR: TANG HAI QING		

X.±	.X± 1.25	.XX± 0.21
X*.± 2*	.X*±	.XX*±
UNITS: mm	DATE: 8/1/2004	
MAT'L		