





REV	ECN. NO.	APPD.
A	DC04029	T. K MENG 8/7/2014

- NOTES:
- DIMENSIONS SHALL BE INTERPRETED PER ANSI Y14.5M-1994
 - CONTACT RETENTION FORCE: 0.91 kgf MIN. PER CONTACT

3 PROD. NO. F150 - NN - N

CONTACT PLATING:
 0=100u" MIN TIN/LEAD PLATING OVER ALL
 2= GOLD FLASH OVER ALL
 8= 15u" GOLD
 NO. OF PDS.

- OPERATION TEMPERATURE : -40°C-115°C

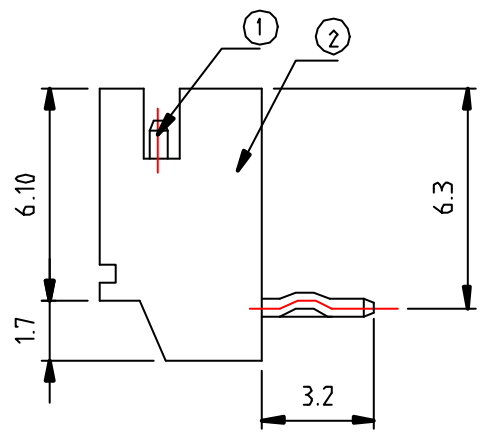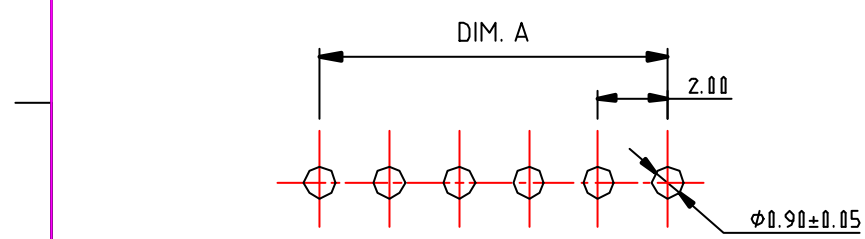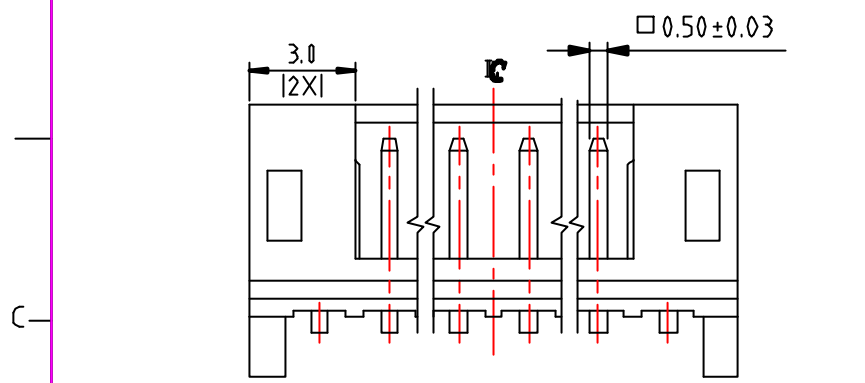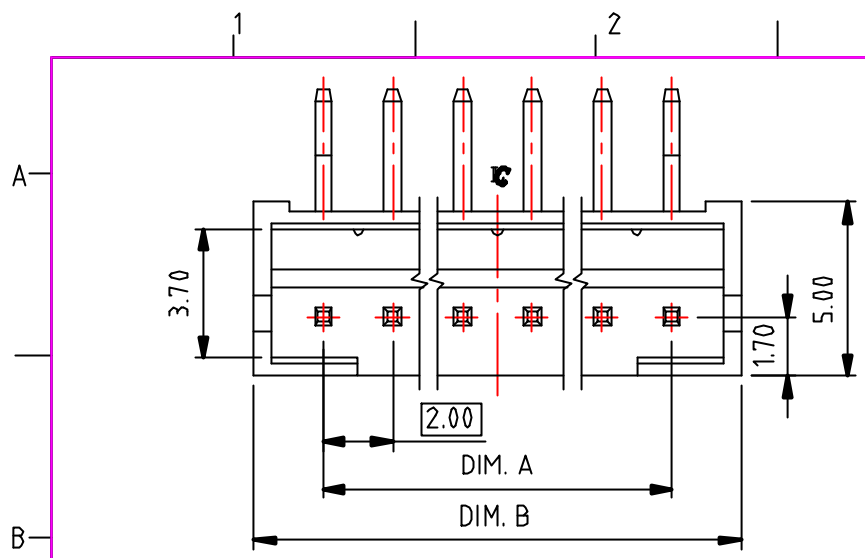

PART NO.	ND OF POS.	DIM.A	DIM.B
F150-16-x	16	30.00	34.00
F150-15-x	15	28.00	32.00
F150-14-x	14	26.00	31.00
F150-13-x	13	24.00	28.00
F150-12-x	12	22.00	26.00
F150-11-x	11	20.00	24.00
F150-10-x	10	18.00	22.00
F150-9-x	9	16.00	20.00
F150-8-x	8	14.00	18.00
F150-7-x	7	12.00	16.00
F150-6-x	6	10.00	14.00
F150-5-x	5	8.00	12.00
F150-4-x	4	6.00	10.00
F150-3-x	3	4.00	8.00
F150-2-x	2	2.00	6.00

ITEM	Q'TY	DESCRIPTION
②	1	HDUSING, NYLON 46 UL94V-1 IVDRY COLOR
①	BASE ON POS.	CONTACT, BRASS, 50u" MIN. NICKEL UNDER PLATE

COMPONENT PARTS LIST

X±	.X± 0.30	.XX± 0.25	NAME-INTENDED USE-> RIGHT ANGLE PN. FRICTION LOCKHEADER	CTL CHARTER INCORPORATION
X°±	.X°±	.XX°±	PART NO.-INTENDED USE-> F150 SERIES	
UNITS:	mm	DATE: 8/1/2014	APPD: T. K MENG	TITLE: CUSTOMER DRAWING
MAT'L			CHKD: ZHANG XIAD	DWG NO. 010-0002-156
			DR: GUOCHAO YAN	SCALE SHEET REV N/A 1/1 A