
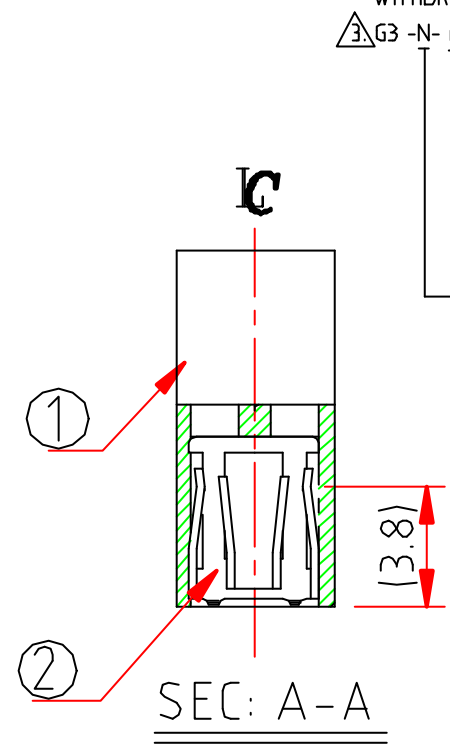
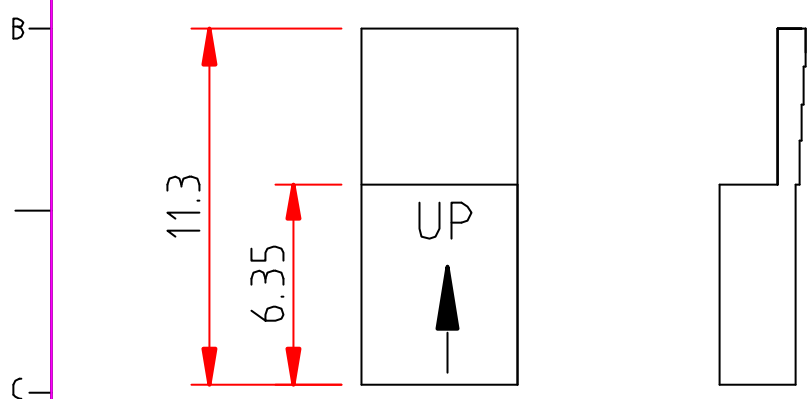



REV	ECN. NO.	APPD.
A	DC04058	T. K MENG 8/1/2014

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. OPERATION TEMPERATURE : -55°C-115°C
- 2. CONTACT RETENTION FORCE: 0.91 kg MIN.
- INSERTION FORCE: 420 GM MAX. PER CONTACT.(PIN GAUGE SQ. 0.64mm)
- WITHDRAWAL FORCE: 28 GM MIN. PER CONTACT.(PIN GAUGE SQ. 0.64 mm)

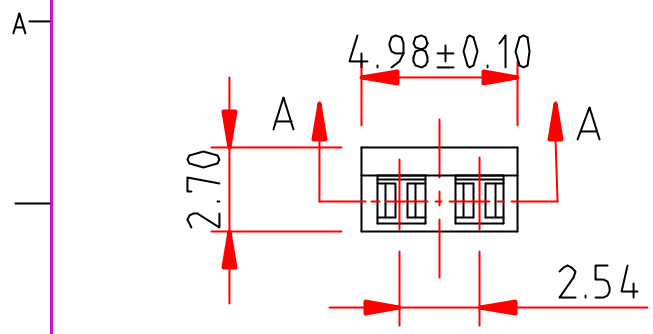

- ③ G3 -N-
- C0= COLOR BLACK
- C1= COLOR BLUE
- C2= COLOR GREEN
- C3= COLOR YELLOW
- C4= COLOR RED
- C5= COLOR WHITE
- NDNE: HOUSING MATERIAL PBT
- A: HOUSING MATERIAL PA6T
- CONTACT AREA PLATED
- 2= GOLD FLASH
- B= 15u" GDLD



ITEM	Q'TY	DESCRIPTION
②	1	CONTACT, PHOSPHOR BRONZE
①	1/10	HOUSING, PBT OR PA6T UL94V-0 30% G/F
COMPONENT PARTS LIST		

X.±	.X± 0.25	.XX± 0.15	NAME <INTENDED USE> JUMPER CONN.	CTL CHATRON INCORPORATION
X°.±	.X°.±	.XX°.±	PART NO. <INTENDED USE> G3 SERIES	
UNITS: mm	DATE: 8/1/2014		APPD: T. K MENG	TITLE: CUSTOMER DRAWING
MAT'L			CHKD: GUDEHAO YAN	DWG NO. 110-0002-325
			DR: TANG HAI QING	SCALE SHEET REV N/A 1/1 A