





REV	ECN. NO.	APPD.
A	DC14044	T.K MENG 8/1/2014

- NOTES:
 1.OPERATION TEMPERATURE : -40°C-105°C
 2.DIMENSIONING SHALL BE INTERPRETED PER ANSI Y14.5M-1994
 3.CONTACT RETENTION FORCE:1.36 Kgf MIN.

Δ P112 -NN- N- N-XINN

- NO.OF SINGLE ROW POS. OPTIONAL FOR MODIFICATION CODE
 HOUSING MATERIAL: SEE DRAWING: 110-1104-420
 CONTACT AREA PLATING
 0=TIN PLATING OVER ALL
 2=GOLD FLASH
 6=30u" GOLD
 8=15u" GOLD

5. REMARK: P112-111-1-1-E111, DIME=DIMC, OTHER DIME=3.40

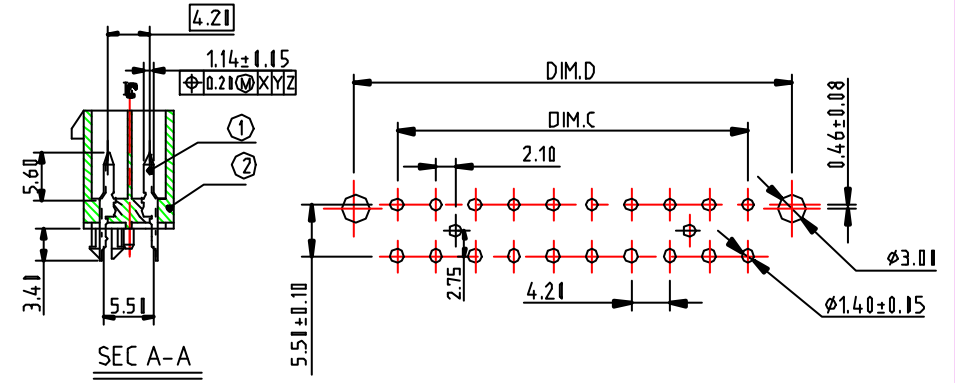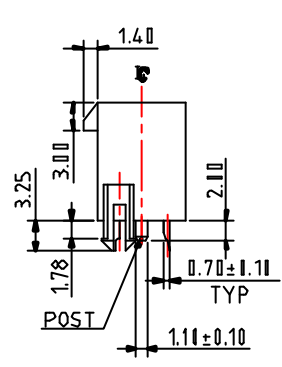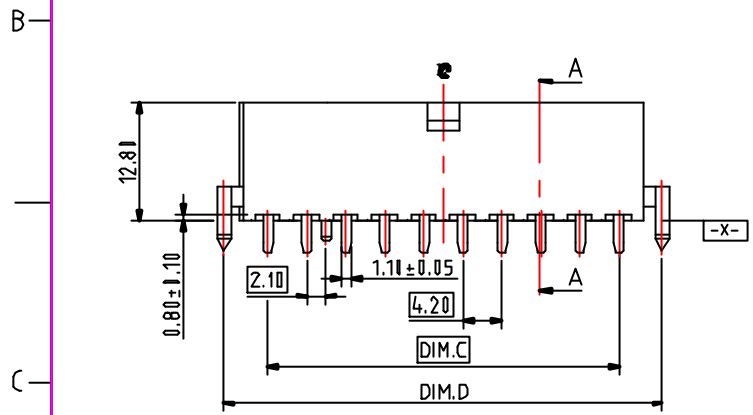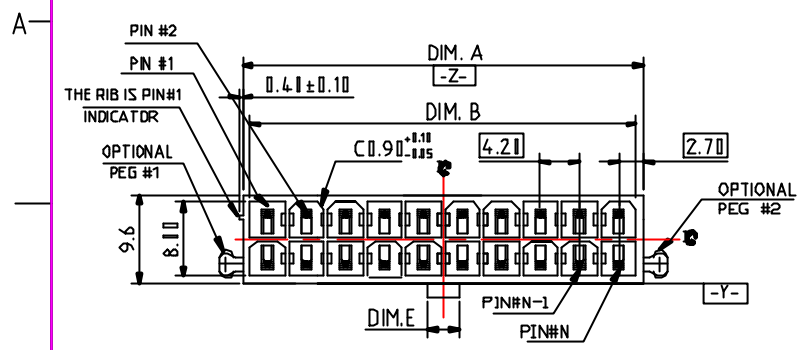

P112-12-x-x-□□□	12/24	51.6	50.00	46.20	55.6
P112-11-x-x-□□□	11/22	47.4	45.81	42.00	51.4
P112-10-x-x-□□□	10/20	43.2	41.60	37.80	47.2
P112-09-x-x-□□□	9/18	39.0	37.40	33.60	43.0
P112-08-x-x-□□□	8/16	34.8	33.20	29.40	38.8
P112-07-x-x-□□□	7/14	30.6	29.00	25.20	34.6
P112-06-x-x-□□□	6/12	26.4	24.80	21.00	30.4
P112-05-x-x-□□□	5/10	22.2	20.60	16.80	26.2
P112-04-x-x-□□□	4/8	18.0	16.40	12.60	22.0
P112-03-x-x-□□□	3/6	13.8	12.20	8.40	17.8
P112-02-x-x-□□□	2/4	9.6	8.00	4.20	13.6
P112-01-x-x-□□□	1/2	5.4	3.80		9.4
PART NO.	NO OF POS.	DIM.A	DIM.B	DIM.C	DIM.D

②	1	HOUSING, IVORY OR NATURAL COLOR, UL94V-1/2
①	BASE DN POS	CONTACT,100u"MIN.TIN OVER ALL OR GOLD SELECTIVE PLATING OVER 30u"MIN NICKEL PLATING
ITEM	Q'TY	DESCRIPTION
COMPONENT PARTS LIST		

X.±	.X± 0.38	.XX± 1.25	NAME-INTENDED USE-> POWER CONN.	CTL[®] CHATRON INCORPORATION
X°.±	.X°.±	.XX°.±		
UNITS: mm	DATE: 8/1/2014		PART NO.-INTENDED USE-> P112 SERIES	TITLE: CUSTOMER DRAWING
MAT'L			APPD: T.K MENG	DWG NO. 010-0003-420
			CHKD: GUOCHAO YAN	SCALE SHEET REV N/A 1/1 A
			DR: TANG HAI QING	