
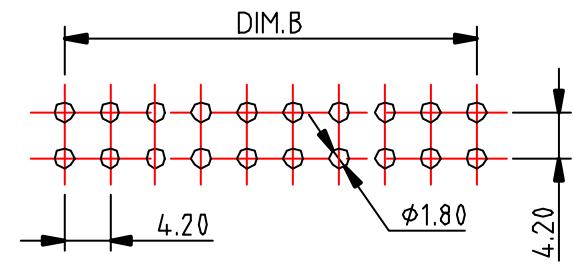
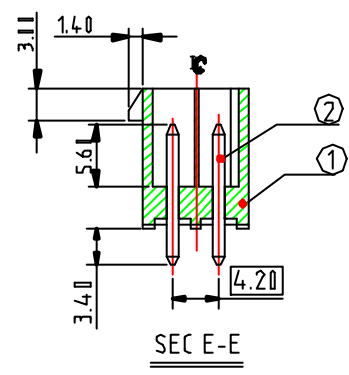
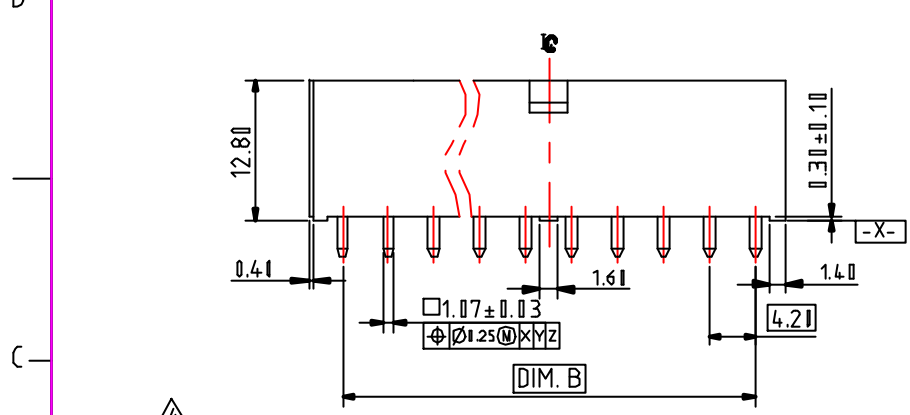


REV	ECN. NO.	APPD.
A	DC04051	T. K MENG 8/7/2014

NOTE:
 1. OPERATION TEMPERATURE : -40°C-115°C
 2. DIMENSIONS SHALL BE INTERPRETED PER ANSI Y14.5M-1994
 3. CONTACT RETENTION FORCE: 1.36 Kgf MIN. PER CONTACT.
 ⚠ PROD. NO. P411-NN-N

CONTACT PLATING
 0= 100u" MIN TIN/LEAD PLATING OVER ALL
 2= GOLD FLASH OVER ALL
 8= 15u" MIN GOLD
 ND. DF SINGLE ROW PDS.

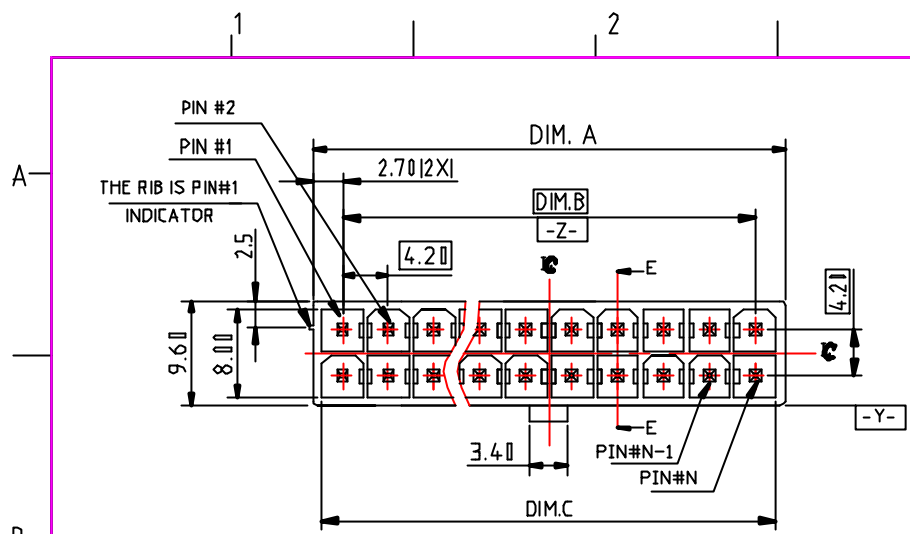

PAPT NO.	NO. OF POS	DIM.A	DIM.B	DIM.C	DIM.D
P401-12-x	12/24	51.6	46.20	51.1	46.21
P401-11-x	11/22	47.4	42.10	45.8	42.01
P401-10-x	10/20	43.2	37.81	41.6	37.80
P401-09-x	9/18	39.0	33.61	37.4	33.60
P401-08-x	8/16	34.8	29.40	33.2	29.41
P401-07-x	7/14	30.6	25.21	29.0	25.20
P401-06-x	6/12	26.4	21.00	24.8	21.01
P401-05-x	5/10	22.2	16.80	21.6	16.80
P401-04-x	4/8	18.0	12.60	16.4	12.60
P401-03-x	3/6	13.8	8.41	12.2	8.40
P401-02-x	2/4	9.6	4.21	8.0	4.20
P401-01-x	1/2	5.4		3.8	

ITEM	Q'TY	DESCRIPTION
②	NO.OF POS.	CONTACT, BRASS
①	1	HOUSING, PA6T UL94V-0, COLOR BLAK

X.±	.X± 1.30	.XX± 1.25	NAME <INTENDED USE> POWER CONN.	CTL CHATRON INCORPORATION
X°.±	.X°.±	.XX°.±	PART NO. <INTENDED USE> P411 SERIES	
UNITS: mm	DATE: 8/1/2014		APPD: T.K MENG	TITLE: CUSTOMER DRAWING
MAT'L			CHKD: GUOCHAO YAN	DWG NO. 111-0002-492
			DR: TANG HAI QING	SCALE SHEET REV N/A 1/1 A