

.079"(2.00mm) pitch Wire to Wire Connectors




H5106 Series



- * Poles:2-10
- * Material:NYLON 66 UL 94V-0
- * Suitable T5106T series terminal
- * Mates with H5105-XX series

Specifications

- * Voltage rating: 125V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 500V AC/minute



inches
mm

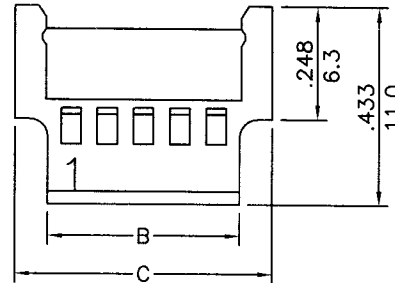



CIRCUITS	PART NO.	DIMENSION in.(mm)		
		A	B	C
2	H5106-02	0.079(2.0)	0.181(4.6)	0.315(8.0)
3	H5106-03	0.157(4.0)	0.260(6.6)	0.394(10.0)
4	H5106-04	0.236(6.0)	0.339(8.6)	0.472(12.0)
5	H5106-05	0.315(8.0)	0.417(10.6)	0.551(14.0)
6	H5106-06	0.394(10.0)	0.496(12.6)	0.630(16.0)
7	H5106-07	0.472(12.0)	0.575(14.6)	0.709(18.0)
8	H5106-08	0.551(14.0)	0.654(16.6)	0.787(20.0)
9	H5106-09	0.630(16.0)	0.732(18.6)	0.866(22.0)
10	H5106-10	0.709(18.0)	0.811(20.6)	0.945(24.0)

.079"(2.00mm) pitch male crimp terminal




T5106T Series

- * Material:Brass
- * Finished:Tin-plated
- * Used in H5106-XX series housings
- * Wire range:AWG#24~#28
- * Insulation O.D:1.1-1.5mm
- * Thickness:0.2mm
- * Q'TY:10,000pcs/reel

inches
mm

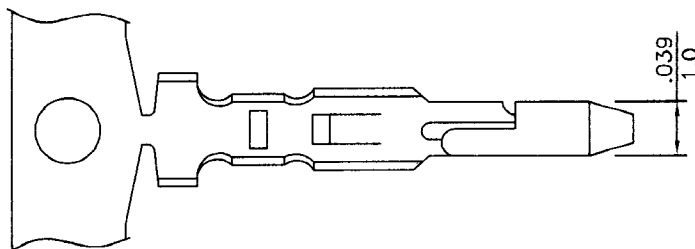

A-A SECTION

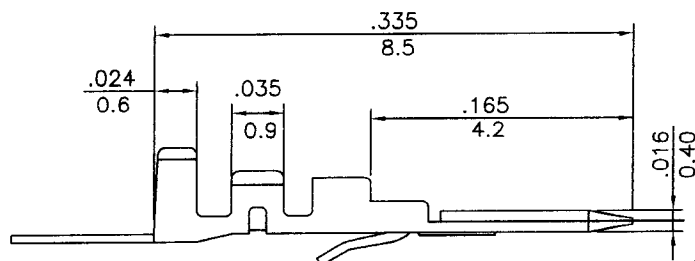

B-B SECTION