

# .163"(4.14mm) pitch crimp terminal




## T66A5/T66A6 Series

- \* Material: Brass.
- \* Finished: Tin-plated
- \* Used in H66A5/H66A6 series housings
- \* Wire range: AWG#18~#24
- \* Insulation O.D: 3.0mm(max)
- \* Thickness: 0.20mm
- \* Q'TY: 4,000pcs/reel


### Pc Board Socket

P/N: T66A5P Used in H66A6/H66A6E

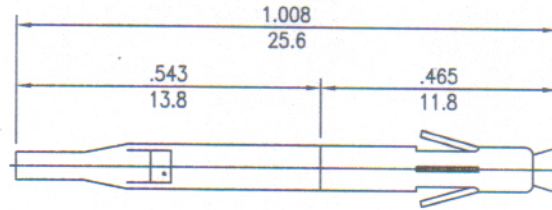


inches  
mm

P/N: T66A5 Used in H66A5

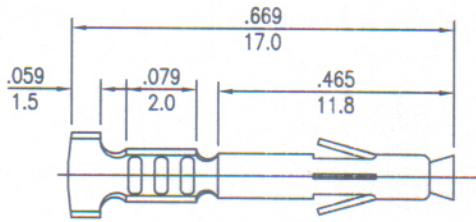

P/N: T66A6 Used in H66A6/H66A6E

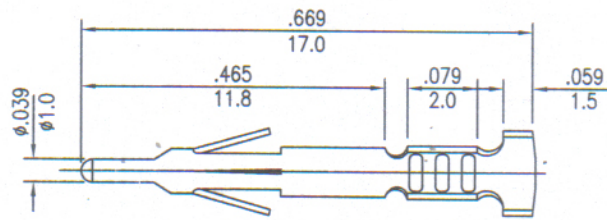


# .163"(4.14mm) pitch connectors

## H66A5/H66A6 Series


- \* Poles: 1,2,3,4,6,9,12,15
- \* Material: NYLON 66 UL94V-2
- \* Suitable T66A5/T66A6 series terminal
- Specifications**
- \* Current rating: 5A AC, DC
- \* Voltage rating: 300V AC, DC
- \* Temperature range: -25°C~+90°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 1,500V AC/minute
- \* Tolerance: ±0.3mm

inches  
mm


P/N: H66A5-01

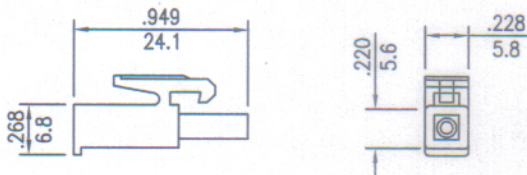


P/N: H66A6-01

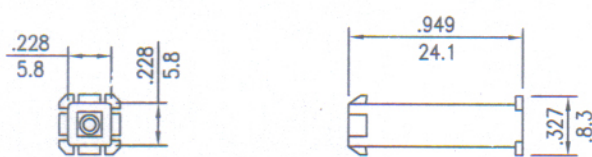

P/N: H66A5-02

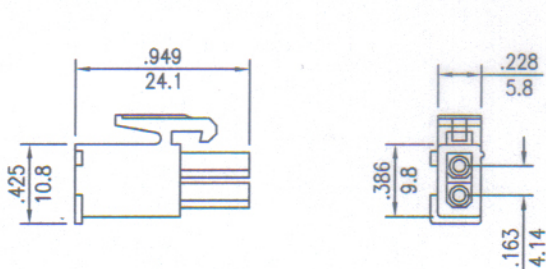

P/N: H66A6E-02



P/N: H66A6-02

