

P.C.B LAYOUT

**MATERIAL**


- \* Contact material: Phosphor bronze
- \* Insulator: PBT OR PPS
- \* Plating: Tin

**SPECIFICATIONS**

- \* Current rating: 1A
- \* Withstanding voltage: 600V AC/minute
- \* Contact resistance: 30 Milliohms (Max)
- \* Insulation resistance: 1,000 Megohms (Max)
- \* Temperature range:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$  For PBT  
 $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$  For PPS

**ORDERING CODE**

PLCC - D - XX - T - T

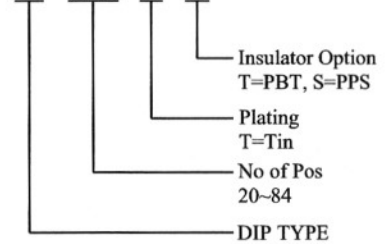

MATERIAL	POS	DIMENSION(mm)					
		A	B	C	D	E	F
PBT, PPS	20, 20S	15.40	15.40	5.08	5.08	10.16	10.16
PBT, PPS	28, 28S	17.94	17.94	7.62	7.62	12.70	12.70
PBT, PPS	32, 32S	17.94	20.48	7.62	10.16	12.70	15.24
PBT, PPS	44, 44S	23.38	23.38	12.70	12.70	17.78	17.78
PBT, PPS	52, 52S	25.92	25.92	15.24	15.24	20.32	20.32
PBT	68	31.60	31.60	20.32	20.32	25.40	25.40
PPS	68S	31.00	31.00	25.40	25.40	25.40	25.40
PBT	84	36.68	36.68	20.32	20.32	30.48	30.48
PPS	84S	36.08	36.08	25.40	25.40	30.48	30.48

詮盛企業股份有限公司

CHIEN SHERN ENTERPRISE CO.,LTD.

TITLE 1.27mm pitch DIP TYPE PLCC SOCKET

PART NO. PLCC-D-XX-T-T

DWG.NO. PLCC-D-XX-T-T

GENERAL TOLERANCE

DIM:  
 X.  $\pm 0.5$   
 X.X  $\pm 0.25$   
 X.XX  $\pm 0.2$   
 X.XXX  $\pm 0.08$

DRAWN

CHECK

APPROVE

SCALE

許建華

DATE

DATE

SCALE 2:1

DATE

DATE

DATE

UNIT mm

REV.

01

2003.06.15