

.100"(2.54mm) pitch single row pin Headers



W328 Series


- * Circuits:02-40
 - * Material:Insulator:PBT UL 94V-0 BLACK
 - * Contact:0.64mm(.025") square pin,brass, gold plated gold flash
 - * Mates with CH328, CM328, series housing
- ### Specifications
- * Current rating: 3A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -40°C~+105°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 500V AC/minute
 - * Applicable PC board thickness: .063" (1.6mm)
 - * Unspecified tolerance; ±0.25

ORDERING CODE


W328X - XX AXXBXXCXX G
 1 2 3 4

1. SERIES NO.
W328S-XX
W328R-XX , W328RD-XX
2. NO.OF CIRCUIT 02-40
3. A/B/C SPECIAL DIMENSION
4. CONTACT PLATED
G=GOLD FLASH
T=TIN


P/N: W328S-XX

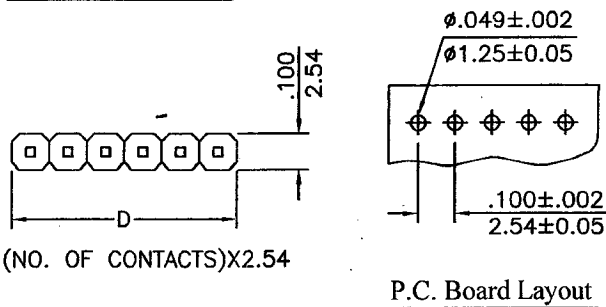


inches
mm




P/N: W328RD-XX




(NO. OF CONTACTS-1)X2.54

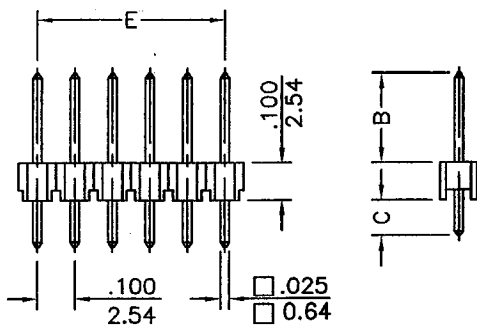

(NO. OF CONTACTS-1)X2.54



P/N: W328R-XX



SPECIAL DIM NEED MOQ REQUIREMENT.

W328S-XX	DIM. "B"	DIM. "C"
STANDARD DIM.	.240(6.1)	.118(3.0)
SPECIAL DIM.		

W328R-XX SERIES	DIM. "A"	DIM. "B"	DIM. "C"
W328R-XX.	.118(3.0)	.142(3.6)	.240(6.1)
SPECIAL DIM.			
W328RD-XX	.236(6.0)	.079(2.0)	.118(3.0)
SPECIAL DIM.			

CKTS	DIM. "D"	DIM. "E"	CKTS	DIM. "D"	DIM. "E"	CKTS	DIM. "D"	DIM. "E"
2	0.200(5.08)	0.100(2.54)	15	1.500(38.10)	1.400(35.56)	28	2.800(71.12)	2.700(68.58)
3	0.300(7.62)	0.200(5.08)	16	1.600(40.64)	1.500(38.10)	29	2.900(73.66)	2.800(71.12)
4	0.400(10.16)	0.300(7.62)	17	1.700(43.18)	1.600(40.64)	30	3.000(76.20)	2.900(73.66)
5	0.500(12.70)	0.400(10.16)	18	1.800(45.72)	1.700(43.18)	31	3.100(78.74)	3.000(76.20)
6	0.600(15.24)	0.500(12.70)	19	1.900(48.26)	1.800(45.72)	32	3.200(81.28)	3.100(78.74)
7	0.700(17.78)	0.600(15.24)	20	2.000(50.80)	1.900(48.26)	33	3.300(83.82)	3.200(81.28)
8	0.800(20.32)	0.700(17.78)	21	2.100(53.34)	2.000(50.80)	34	3.400(86.36)	3.300(83.82)
9	0.900(22.86)	0.800(20.32)	22	2.200(55.88)	2.100(53.34)	35	3.500(88.90)	3.400(86.36)
10	1.000(25.40)	0.900(22.86)	23	2.300(58.42)	2.200(55.88)	36	3.600(91.44)	3.500(88.90)
11	1.100(27.94)	1.000(25.40)	24	2.400(60.96)	2.300(58.42)	37	3.700(93.98)	3.600(91.44)
12	1.200(30.48)	1.100(27.94)	25	2.500(63.50)	2.400(60.96)	38	3.800(96.52)	3.700(93.98)
13	1.300(33.02)	1.200(30.48)	26	2.600(66.04)	2.500(63.50)	39	3.900(99.06)	3.800(96.52)
14	1.400(35.56)	1.300(33.02)	27	2.700(68.58)	2.600(66.04)	40	4.000(101.60)	3.900(99.06)