


# C-TEK 1.27MM PITCH FEMALE HEADER

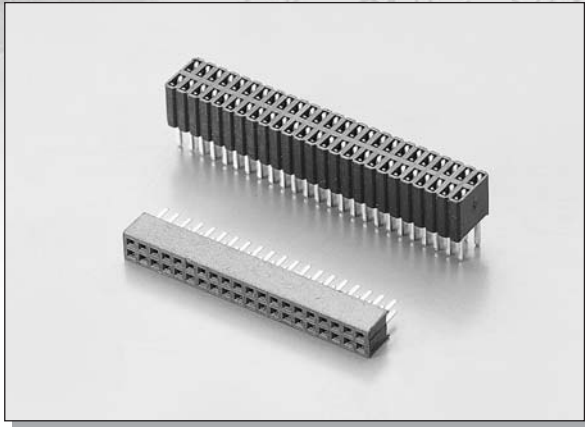

## MATERIAL:


INSULATOR : PBT + 30% GLASS FIBER,  
UL 94V-0 RATED.

CONTACT : PHOSPHOR BRONZE OR BRASS.  
(STANDARD IS BRASS)

## ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 1 AMP.  
WITHSTANDING VOLTAGE : AC 750V R.M.S.  
INSULATOR RESISTANCE : 5000 MEGOHMS MIN.  
CONTACT RESISTANCE : 20 MILLIOHMS MAX.  
OPERATING TEMPERATURE : -55°C ~ +105°C

## DIMENSIONS

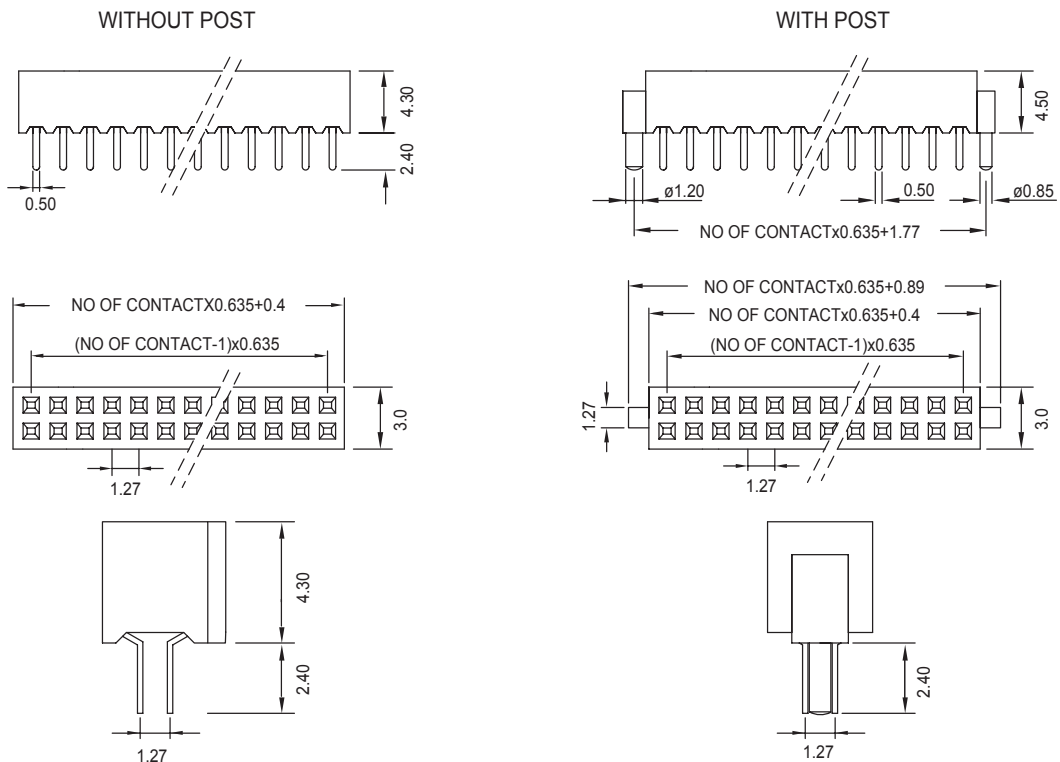

## HOW TO ORDER

SERIES NO.	PITCH	CONTACT NO.	CONTACT TYPE	PLATING	POST	HOUSING PROFILE
<b>5006</b>	<b>A</b>	<b>2 x 6</b>	<b>S</b>	<b>G</b>	<b>1</b>	<b>1</b>
	A: 1.27 x 2.54 B: 1.27 x 1.27	1x2P ~ 1x40P 2x2P ~ 2x40P	S: STRAIGHT M: SMT	G: GOLD PLATED S: SELECTIVE GOLD PLATED	1: W/O POST 2: W/POST	1: 2.05MM 2: 3.4MM 3: 4.3MM 4: 5.8MM 5: 8.5MM