


C-TEK SCART CONNECTOR DUAL PORT WITH SHELL

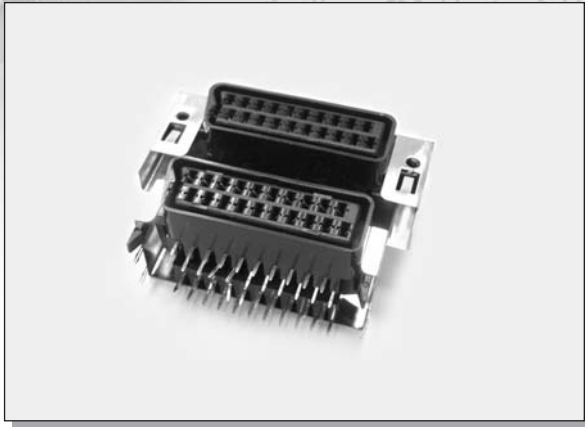

MATERIAL:

HOUSING : ABS UL 94V-0.

CONTACT : BRASS.

ELECTRICAL CHARACTERISTICS:

WITHSTAND VOLTAGE : AC 500V (50Hz)MIN.




CURRENT RATING : AC 50 0.2A.

CONTACT RESISTANCE : 0.02 OHM MAX.

INSULATION RESISTANCE : 100M OHM MIN.

OPERATING TEMPERATURE : -25°C TO +70°C.

DIMENSIONS

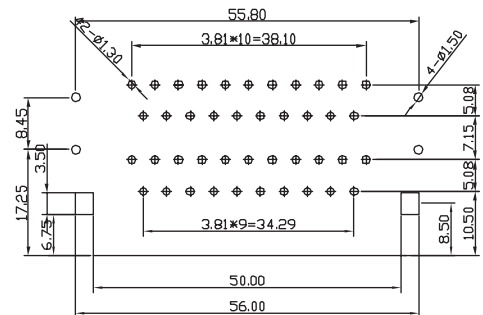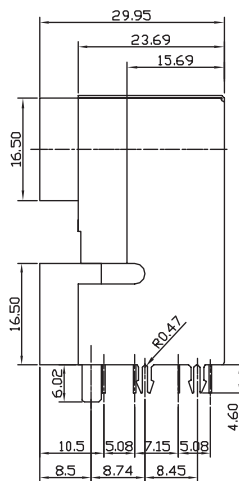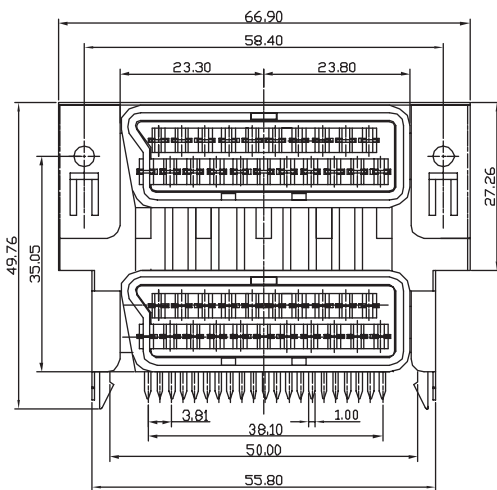

HOW TO ORDER

SERIES NO.

7006

TYPE

D

D: DUAL PORT

SHELL

1

1: W/METAL SHELL

PLATING

T

T: TIN PLATED