C-TEK CF CARD TYPE II PROFILE 5.8MM / 6.7MM

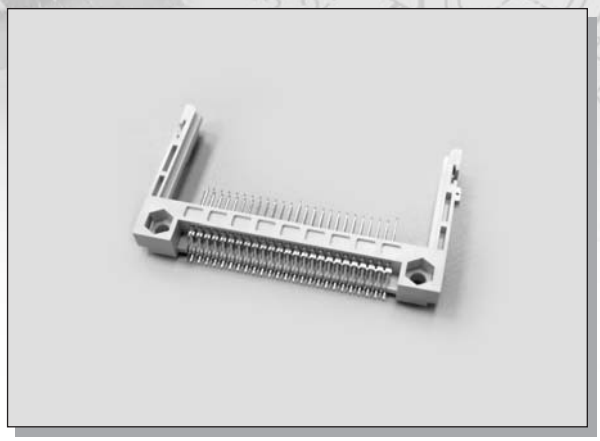

MATERIAL:

HOUSING	: THERMOPLASTIC (UL 94V-0).
CONTACT	: PHOSPHOR BRONZE.

SPECIFICATION:

VOLTAGE RATING	: 50V DC MAX.
CURRENT RATING	: 0.5A MAX.
OPERATING TEMPERATURE	: -20°C ~ +80°C
INSULATION RESISTANCE	: 1000 MΩ MIN.
CONTACT RESISTANCE	: 100 MΩ MAX.

DIMENSIONS

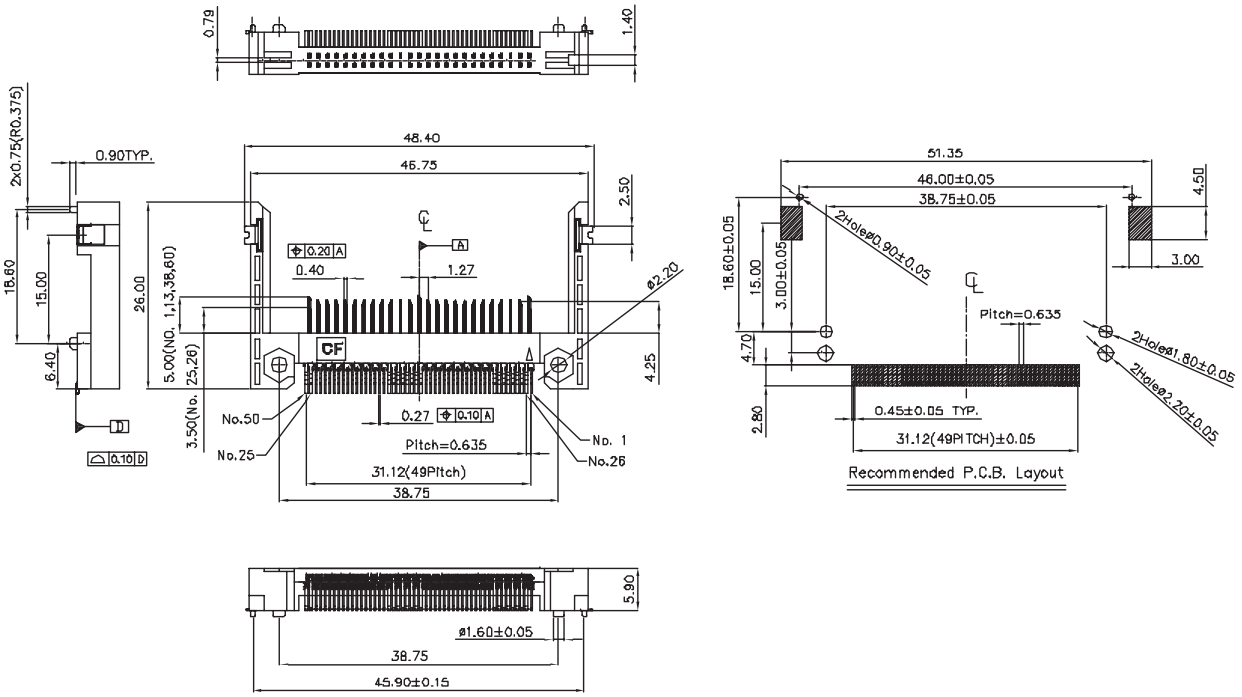

HOW TO ORDER

	SERIES NO.	TYPE	PLATING	HOUSING PROFILE	
	8002	**N**	**S**	**1**	
		N: NORMAL R: REVERSE	S: SELECTIVE GOLD PLATED S1: SELECTIVE GOLD 15u" S2: SELECTIVE GOLD 30u"	1: 5.9MM 2: 6.7MM	