


C-TEK MINI SD CARD MANUAL / PUSH PUSH TYPE

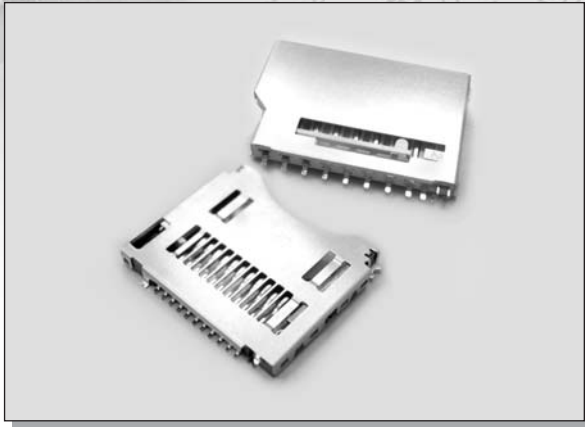


MATERIAL:

HOUSING : THERMOPLASTIC (UL 94V-0).
CONTACT : PHOSPHOR BRONZE.

SPECIFICATION:

VOLTAGE RATING : 50V DC MAX.
CURRENT RATING : 0.5A MAX.
OPERATING TEMPERATURE : -20°C ~ +80°C
INSULATION RESISTANCE : 1000 MΩ MIN.
CONTACT RESISTANCE : 100 MΩ MAX.

DIMENSIONS

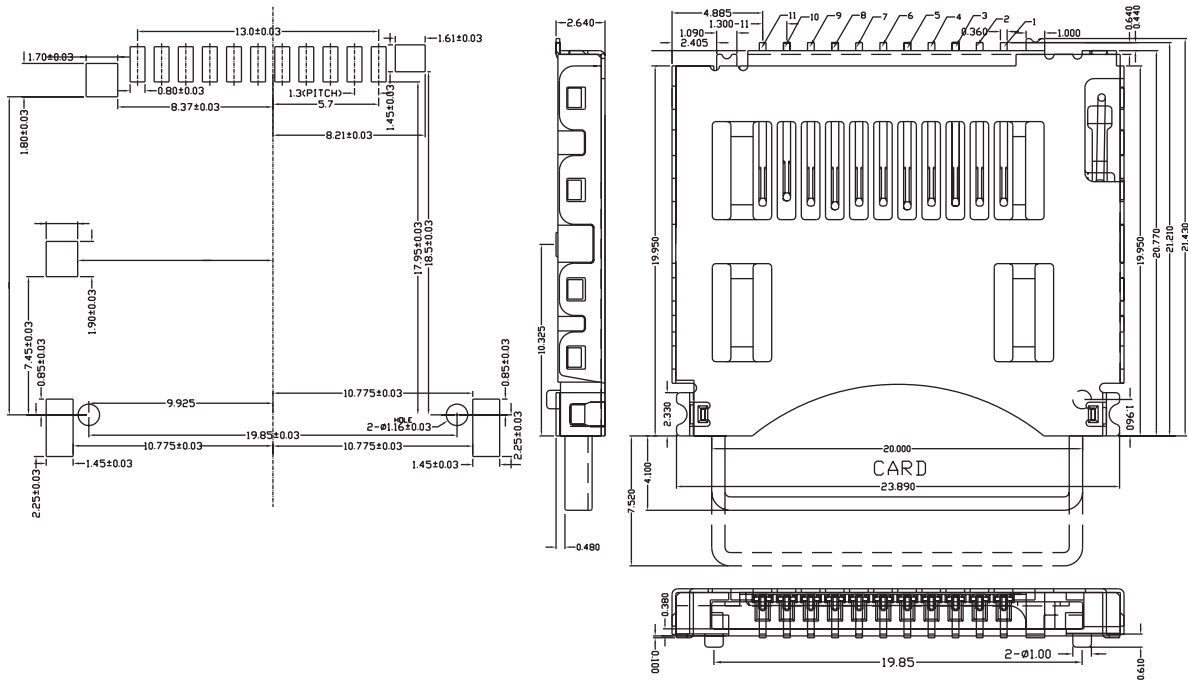

HOW TO ORDER

SERIES NO.	TYPE	PLATING
8006	M	S
	M: MANUAL TYPE P: PUSH PUSH TYPE	S: SELECTIVE GOLD PLATED S1: SELECTIVE GOLD 15u" S2: SELECTIVE GOLD 30u"