



1. PHYSICAL DIMENSION (UNIT: mm)

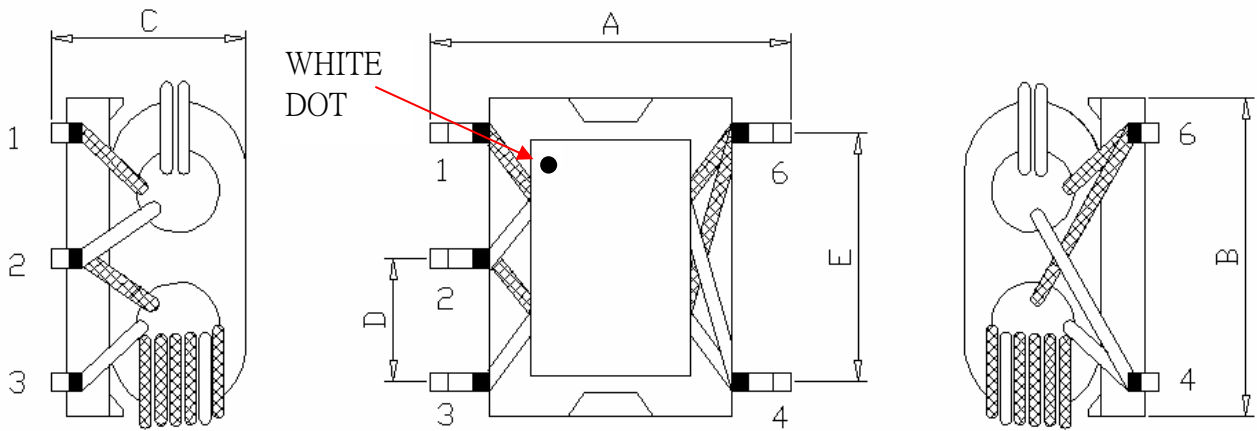

2. SCHEMATIC:

NOTE: **A:6.5 MAX** **B:6.0 MAX**
C:4.6MAX **D:2.0±0.3**
E:4.0±0.3

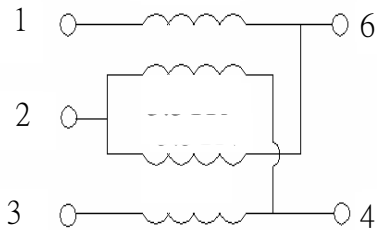

STANDRAD SERIES

Clider part numbe	Return Loss	Frequency range	Insertion Loss
CRBT-6050-6dB	6.2dB	50-1000MHz	3.5dB(max)
CRBT-6050-8dB	8.1dB	50-1000MHz	3.5dB(max)
CRBT-6050-10dB	10.3dB	50-1000MHz	3.5dB(max)
CRBT-6050-12dB	12.2dB	50-1000MHz	3.5dB(max)
CRBT-6050-15dB	15.2dB	50-1000MHz	3.5dB(max)
CRBT-6050-17dB	17.1dB	50-1000MHz	3.5dB(max)

CLIDER ENTERPRISE CO., LTD.

可立德實業有限公司