


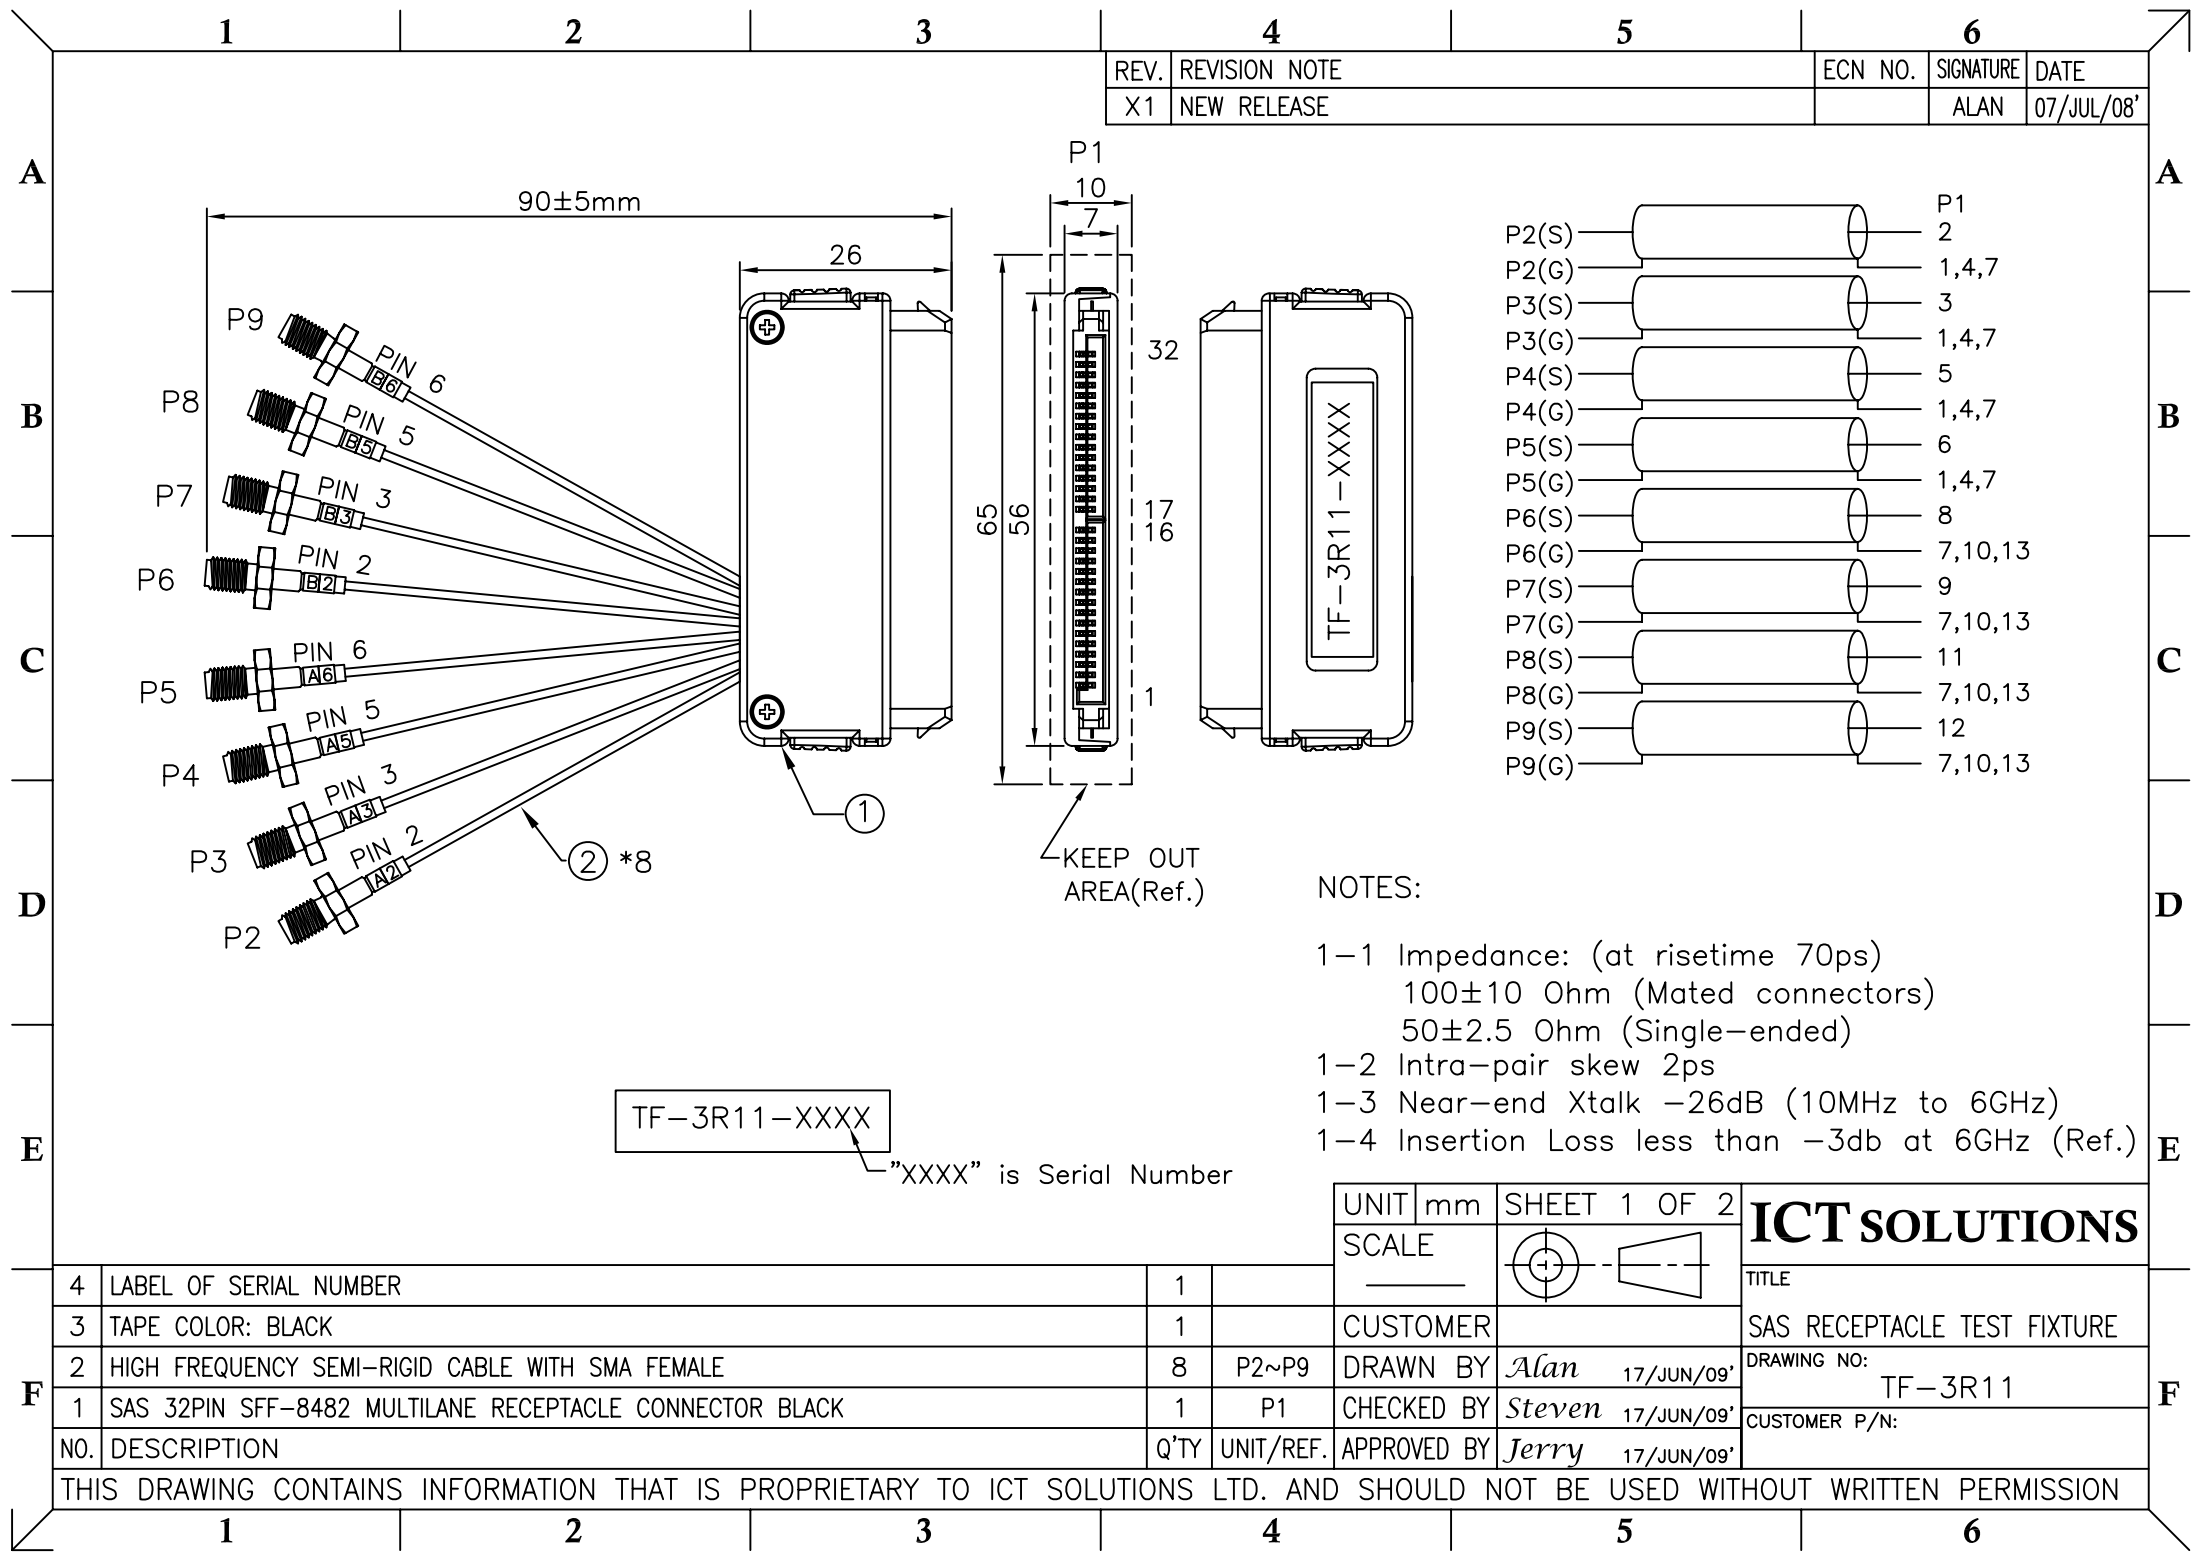

REV.	REVISION NOTE	ECN NO.	SIGNATURE	DATE
X1	NEW RELEASE		ALAN	07/JUL/08'

P2(S)	P1
P2(G)	2
P3(S)	1,4,7
P3(G)	3
P4(S)	1,4,7
P4(G)	5
P5(S)	1,4,7
P5(G)	6
P6(S)	1,4,7
P6(G)	8
P7(S)	7,10,13
P7(G)	9
P8(S)	7,10,13
P8(G)	11
P9(S)	7,10,13
P9(G)	12

NOTES:

1-1 Impedance: (at risetime 70ps)
100±10 Ohm (Mated connectors)
50±2.5 Ohm (Single-ended)

1-2 Intra-pair skew 2ps

1-3 Near-end Xtalk -26dB (10MHz to 6GHz)

1-4 Insertion Loss less than -3db at 6GHz (Ref.)

4	LABEL OF SERIAL NUMBER	1	
3	TAPE COLOR: BLACK	1	
2	HIGH FREQUENCY SEMI-RIGID CABLE WITH SMA FEMALE	8	P2~P9
1	SAS 32PIN SFF-8482 MULTILANE RECEPTACLE CONNECTOR BLACK	1	P1
NO.	DESCRIPTION	Q'TY	UNIT/REF.

UNIT	mm	SHEET 1 OF 2
SCALE		
CUSTOMER		
DRAWN BY	Alan	17/JUN/09'
CHECKED BY	Steven	17/JUN/09'
APPROVED BY	Jerry	17/JUN/09'

ICT SOLUTIONS
TITLE
SAS RECEPTACLE TEST FIXTURE
DRAWING NO:
TF-3R11
CUSTOMER P/N:

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ICT SOLUTIONS LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION