
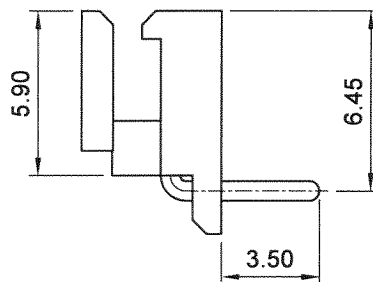


P.C.B LAYOUT COMPONENT SIDE

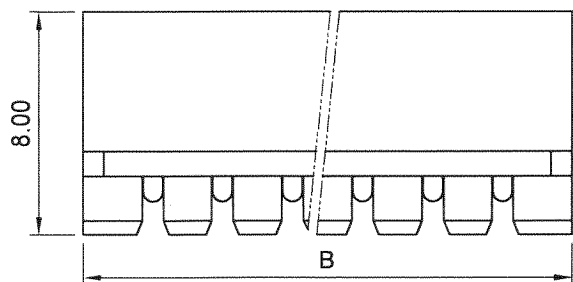

SPECIFICATIONS

Electrical

Current Rating : 2.5A AC, DC
Voltage Rating : 250V AC/ max.
Operating Temp. : -25°C ~ +85°C
Insulation Resistance : 1000M Ω / min.
Dielectric Withstanding Voltage : 800V AC/ min.
Contact Resistance : 20m Ω / max.

Material

Terminal Material : Brass, Copper-Undercoated,
/ Tin-Lead plated
Material : Nylon 66, UL94V-0

Poles	Dimension mm	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.50	40.00

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw

THIRD ANGLE
PROJECTION

DESIGN UNITS
mm INCH

TITLE:
2.50mm MLX WAFER 90° TYPE

GENERAL TOLERANCES:

DRAWN

李如益

DATE 96/05/22

SIZE:

A4

SCALE:

FREE

SHEET:

1/1

PARTS NO.:

250D-WR-xxT

X. \pm N/A
X.X \pm 0.35
X.XX \pm 0.20

CHECK

Wang

DATE 96.6.6

CPN NO.:

DAN NO.: S9605-037

DWG NO.:

JAWS-SOP-250D002

REV.

01

ANGLE \pm N/A

APPROVE

Wang

DATE 96.6.6