
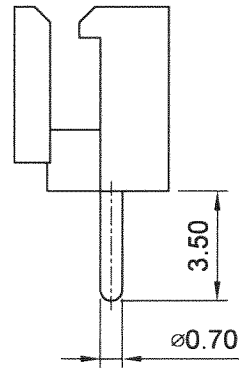


P.C.B LAYOUT COMPONENT SIDE

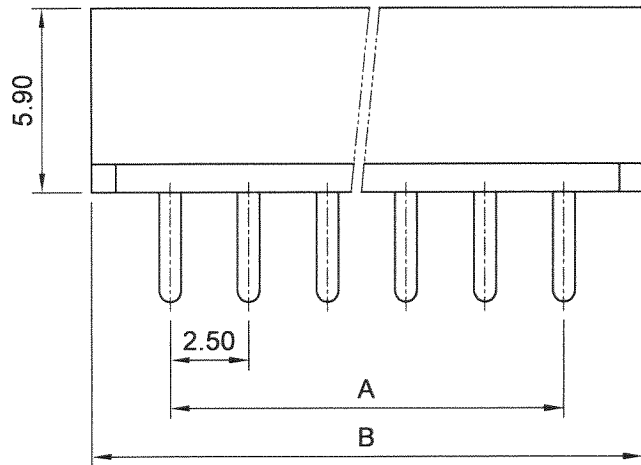


Specifications

Current Rating : 3A AC, DC
 Voltage Rating : 250 AC Maximum
 Operating Temp : -25°C ~ +85°C
 Contact Resistance : 20M Ω Max
 Insulation Resistance : 1000M Ω Min
 Terminal Material : Brass/ Tin-plated/ Gold-plated
 Material : Nylon 66, UL94V-0

Poles	Dimension mm	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.50	40.00

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw



THIRD ANGLE
PROJECTION

DESIGN UNITS
mm INCH

SIZE: **A4** SCALE: **FREE** SHEET: **1/1**

CPN NO.:
DAN NO.: S9605-010

TITLE:
2.50mm MLX WAFER 180°

PARTS NO.:
250D-WS-xxT

DWG NO.:
JAWS-SOP-250D001

GENERAL TOLERANCES:

X. \pm N/A
 X.X \pm 0.35
 X.XX \pm 0.20
 ANGLE \pm N/A

DRAWN	李如益	DATE	96/05/10
CHECK	Wang	DATE	96.5.15
APPROVE	Wang	DATE	96.5.15