
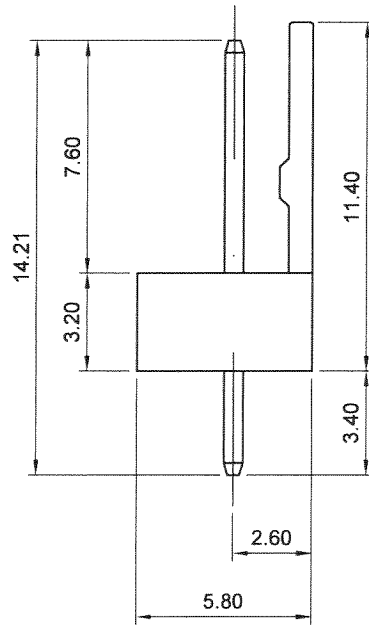
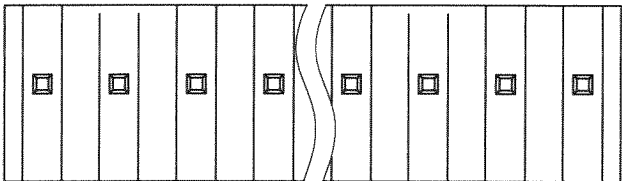
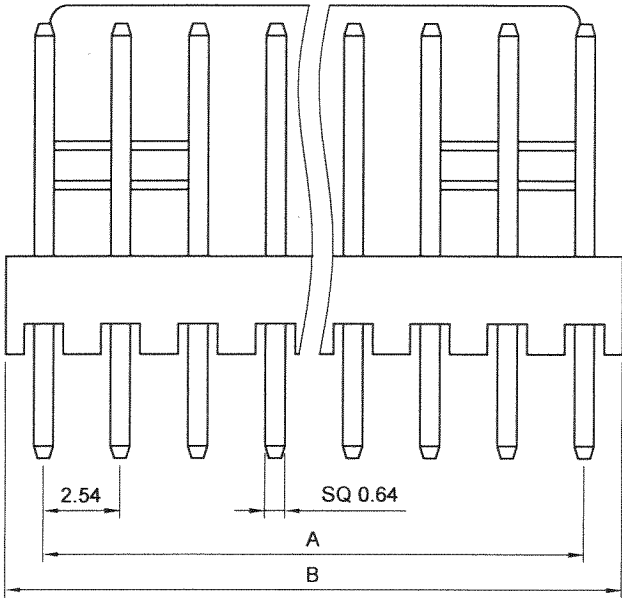



RoHS
Compliant
2002/95/EC

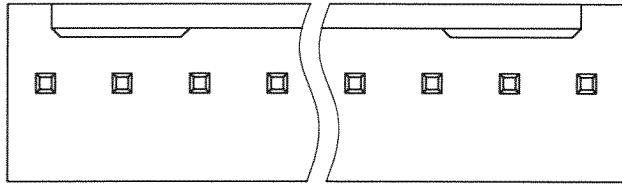

SPECIFICATIONS

CURRENT RATING : 2A AC, DC
 VOLTAGE RATING : 250 AC MAXIMUM
 OPERATING TEMP : -25°C ~ + 85°C
 CONTACT RESISTANCE : 10 mΩ MAX
 INSULATION RESISTANCE : 1000 MΩ MIN
 TERMINAL MATERIAL : BRASS/ TIN-PLATED/GOLD-PLATED
 MATERIAL : NYLON 66, UL94V-2

POLES	DIMENSION mm	
	A	B
2	2.54	5.12
3	5.08	7.66
4	7.62	10.20
5	10.16	12.74
6	12.70	15.30
7	15.24	17.94
8	17.78	20.48
9	20.32	23.02
10	22.86	25.58
11	25.40	28.12
12	27.94	30.68
13	30.48	33.10
14	33.02	35.80
15	35.56	38.34
16	38.10	40.94
17	40.64	43.30
18	43.18	45.90
19	45.72	48.56
20	48.26	50.80

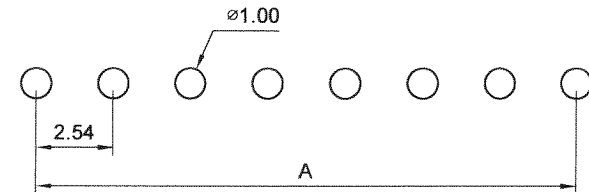

RECOMMENDED P.C. BOARD HOLE DIMM.

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw

THIRD ANGLE PROJECTION		DESIGN UNITS mm INCH
SIZE: A4	SCALE: FREE	SHEET: 1/1
CPN NO.:	DAN NO.: S9709-046	

TITLE: 2.54mm WIRE-TO-BOARD HEADER DIP 180° TYPE	
PARTS NO.: 250E-WS-xxT	
DWG NO.: JAWS-SOP-250E002	REV. 01

GENERAL TOLERANCES: ±0.30	DRAWN: 游熾瑩	DATE: 97/09/23
	CHECK: 郭坤峰	DATE: 97.9.24
	APPROVE: 陳世官	DATE: 97.9.25