

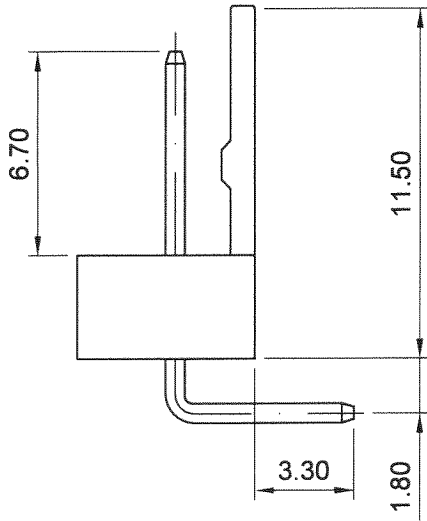
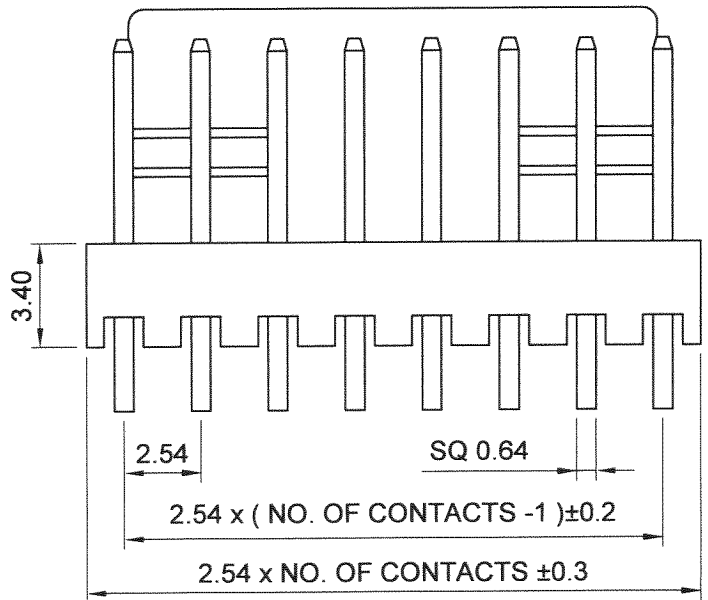


**RoHS**  
Compliant  
2002/95/EC

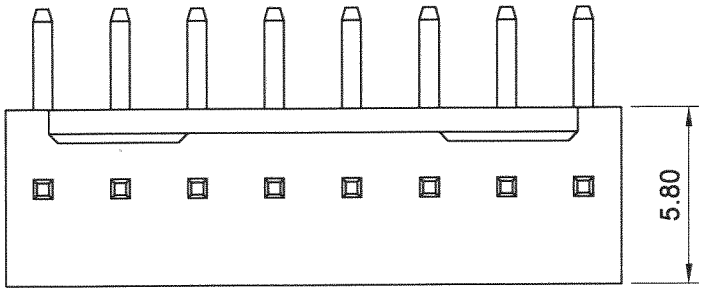

**ELECTRICAL**

POLES : 2-20  
 MATERIAL : INSULATOR : NYLON UL 94V-2, COLOR IVORY  
 CONTACT : 0.64mm SQUARE PIN, BRASS, TIN PLATED 60μ"  
**SPECIFICATIONS**  
 CURRENT RATING : 3A AC, DC  
 VOLTAGE RATING : 250V AC, DC  
 TEMPERATURE RANGE : -25°C ~ +85°C  
 INSULATION RESISTANCE : 1000 MΩ MIN.  
 WITHSTAND VOLTAGE : 1000 AC/MINUTE  
 APPLICABLE PC BOARD THICKNESS : 1.6mm

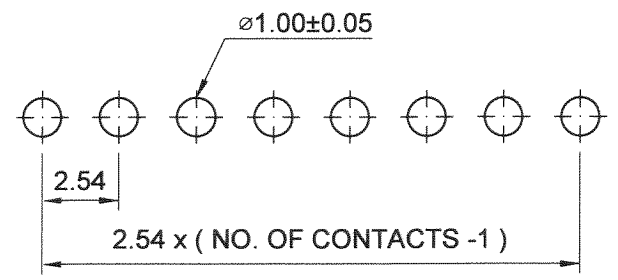

RECOMMENDED P.C. BOARD HOLE DIMM.

**JAWS** 兆旭股份有限公司  
 JAWS CO., LTD.  
 7F-1, NO.31, Lane 169, Kang Ning Street,  
 Hsichih, Taipei Hsien, Taiwan.  
 TEL: 886-2-2692-2898  
 FAX: 886-2-2692-2618  
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION		DESIGN UNITS mm INCH
SIZE: A4	SCALE: FREE	SHEET: 1/1
CPN NO.:		DWG NO.: JAWS-SOP-254K005
DAN NO.: S9707-070		REV.: 01

TITLE: 2.54mm Wire-to-Board Header DIP 90° Type		GENERAL TOLERANCES: ±0.30
PARTS NO.: 254K-WR-xxT		

DRAWN	游熾瑩	DATE	97/07/29
CHECK	郭坤學	DATE	97.7.30
APPROVE	陳世淳	DATE	97.7.31