
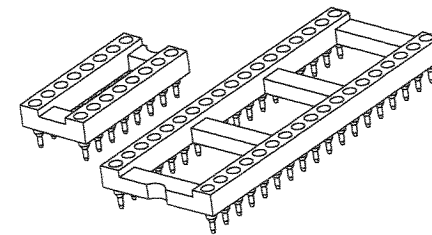

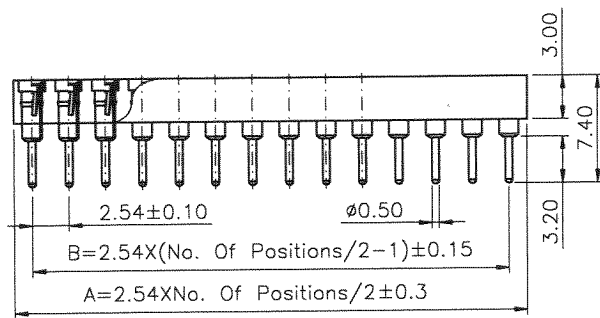



RoHS
Compliant
2002/95/EC

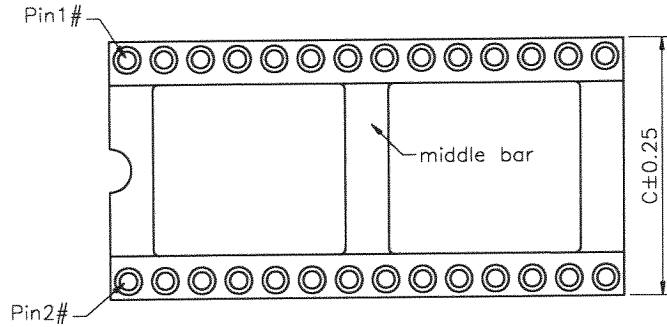

Specifications:
 Current rating:1.0A AC/DC
 Voltage rating:100V AC/DC
 Contact resistance:15m ohm. max.
 Insulator resistance:5000M ohm. Min.
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C to +105°C
 Material and Finish:
 Insulator:High Temp. Plastic(PBT UL94V-0)
 Standard Color:Black
 Contact:Beryllium Copper(Becu) Gold Plated
 Sleeve Barrel:Copper Alloy Tin Plated

Note1: W/O middle bar(6~16P)
 With middle bar(18~64P)

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space
6	7.62	5.08	10.16	7.62	0.3	22	27.94	25.40	12.70	10.16	04
8	10.16	7.62	10.16	7.62		24	30.48	27.94	17.78	15.24	06
14	17.78	15.24	10.16	7.62		28	35.56	33.02	17.78	15.24	
16	20.32	17.78	10.16	7.62		32	40.64	38.10	17.78	15.24	
18	22.86	20.32	10.16	7.62		40	50.80	48.26	17.78	15.24	
20	25.40	22.86	10.16	7.62		42	53.34	50.80	17.78	15.24	
24	30.48	27.94	10.16	7.62		48	60.96	58.42	17.78	15.24	
28	35.56	33.02	10.16	7.62		64	81.28	78.74	26.00	22.86	09

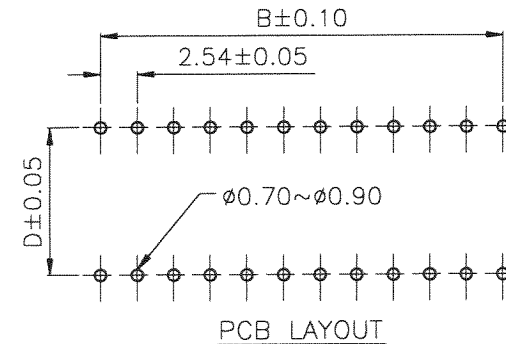

JAWS® 兆旭股份有限公司
 JAWS CO., LTD.
 7F-1, NO.31, Lane 169, Kang Ning Street,
 Hsichih, Taipei Hsien, Taiwan.
 TEL:886-2-2692-2898
 FAX:886-2-2692-2618
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION
 SIZE: A4
 SCALE: FREE
 SHEET: 1/1
 CPN NO.:
 DAN NO.: S9707-061

DESIGN UNITS
 mm INCH

TITLE:
2.54mm IC Socket Machine Pin
 PARTS NO.:
254N-xxP-x
 DWG NO.:
JAWS-SOP-254N001
 REV.
02

GENERAL TOLERANCES:
 X. ±N/A
 X.X ±0.20
 X.XX ±0.15
 ANGLE ±N/A

DRAWN	游熾瑩	DATE	97/07/23
CHECK	郭坤峰	DATE	97.7.23
APPROVE	陳世官	DATE	97.7.29