


RoHS
Compliant
2002/95/EC

SPECIFICATIONS

ELECTRICAL
CURRENT RATING : 5A AC, DC
VOLTAGE RATING : 250V AC, DC
OPERATING TEMP. : -25°C ~ +85°C
INSULATION RESISTANCE : 1000MΩ MIN.
DIELECTRIC WITHSTANDING VOLTAGE : 1500V AC/ MIN.
CONTACT RESISTANCE : 10mΩ MAX.

MATERIAL
STANDARD : NYLON66

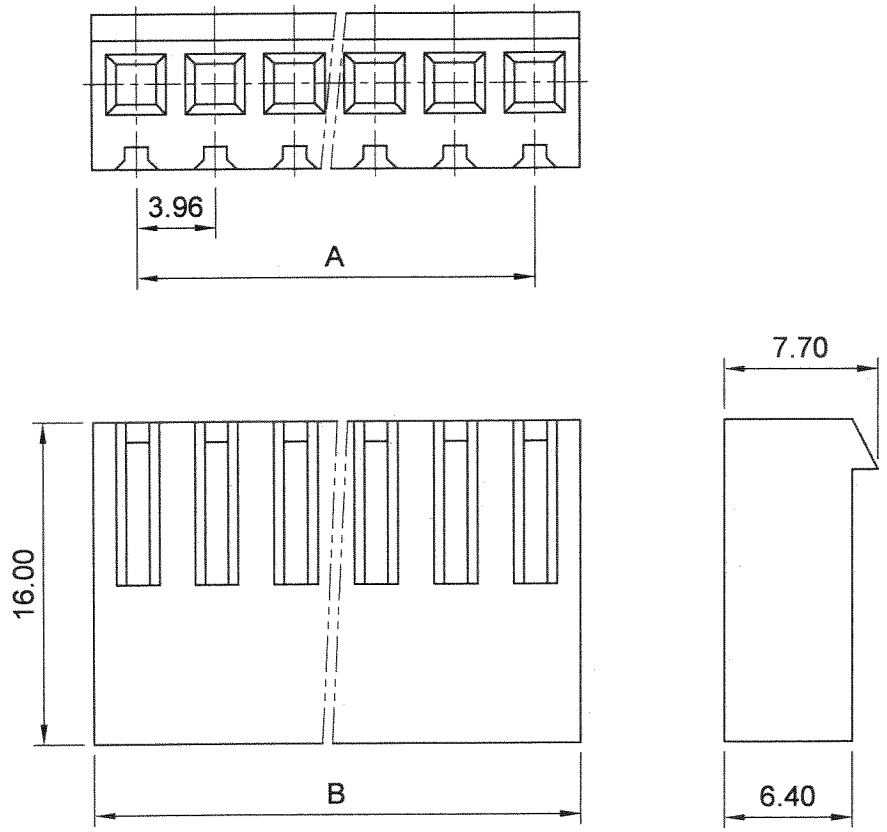

Poles	Dimension mm	
	A	B
2	3.96	8.42
3	7.92	12.38
4	11.88	16.34
5	15.84	20.30
6	19.80	24.26
7	23.76	28.22
8	27.72	32.18
9	31.68	36.14
10	35.64	40.10
11	39.60	44.06
12	43.56	48.02
13	47.52	51.98
14	51.48	55.94
15	55.44	59.90
16	59.40	63.86
17	63.36	67.82
18	67.32	71.78
20	75.24	79.70

JAWS 兆旭股份有限公司
JAWS CO., LTD.
7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw

THIRD ANGLE PROJECTION
DESIGN UNITS
mm INCH
SIZE: A4 SCALE: FREE SHEET: 1/1
CPN NO.:
DAN NO.: S9611-070

TITLE:
3.96mm Wire to Board Housing
PARTS NO.:
396A-xxP
DWG NO.:
JAWS-SOP-396A001
REV. 01

GENERAL TOLERANCES:
X. ±0.40
X.X ±0.30
X.XX ±0.25
ANGLE ±N/A

DRAWN 游熾瑩 DATE 96/11/30
CHECK 郭坤峰 DATE 96/11/30
APPROVE 陳世宮 DATE 96/12/3