

SPECIFICATIONS

Electrical

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Operating Temp: -25°C~ +85°C



Insulation Resistance: 1000MΩ/min.

Dielectric Withstanding Voltage: 1500V AC/min.



Contact Resistance: 10mΩ/max.

MATERIAL

Material: Nylon66, UL94V-2

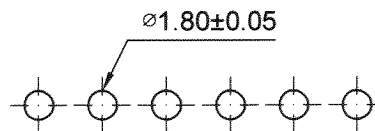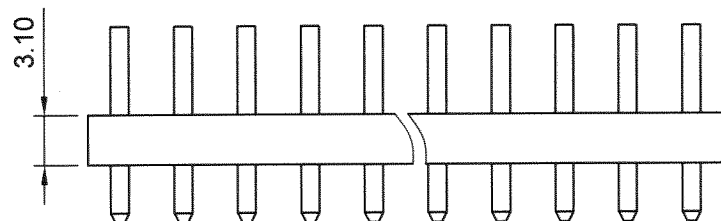

PCB LAYOUT COMPONENT SIDE

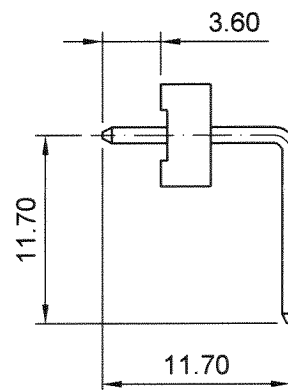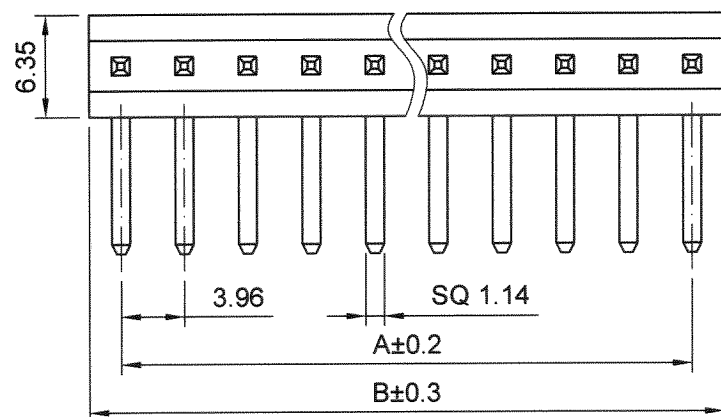

Poles	Dimension mm	
	A	B
2	3.96	8.00
3	7.92	12.00
4	11.88	15.90
5	15.84	20.00
6	19.80	24.00
7	23.76	27.90
8	27.72	31.90
9	31.68	35.80
10	35.64	39.90
11	39.60	43.90
12	43.56	47.80
13	47.52	51.80
14	51.48	55.70
15	55.44	59.80
16	59.40	63.80
17	63.36	67.70
18	67.32	71.70
19	71.28	75.60
20	75.24	79.80