
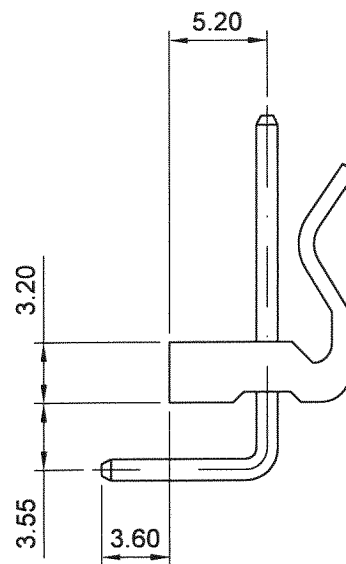
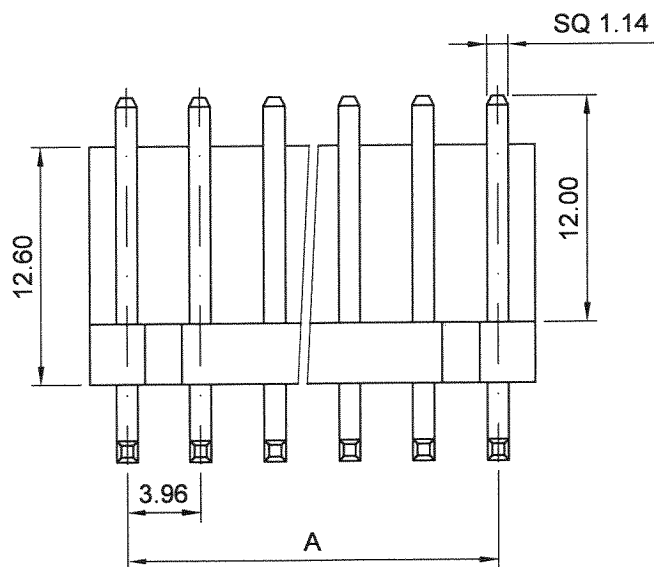


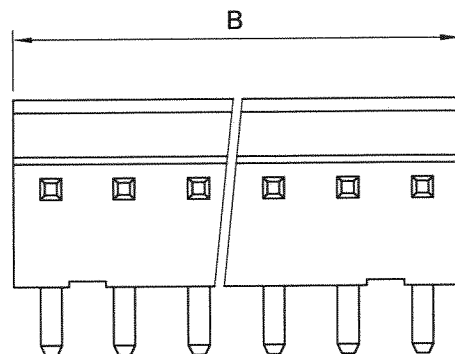

SPECIFICATIONS

ELECTRICAL

CURRENT RATING : 5A

VOLTAGE RATING : 250V AC, DC

OPERATING TEMP. : -25°C ~ +85°C

INSULATION RESISTANCE : 1000 MΩ / MIN.

DIELECTRIC WITHSTANDING VOLTAGE : 1500V AC/ MIN.

CONTACT RESISTANCE : 10 mΩ / MAX.

MATERIAL

MATERIAL : NYLON 66

Poles	Dimension mm	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
20	75.24	79.20