

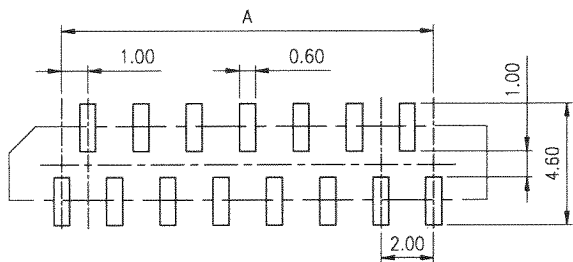

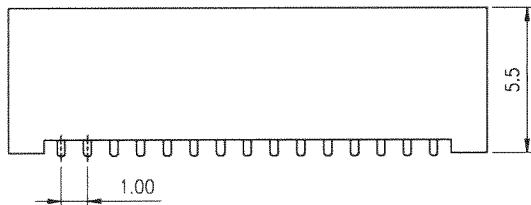
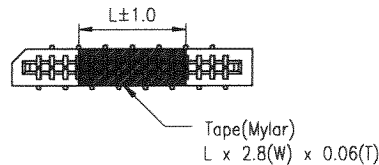


RoHS
Compliant
2002/95/EC

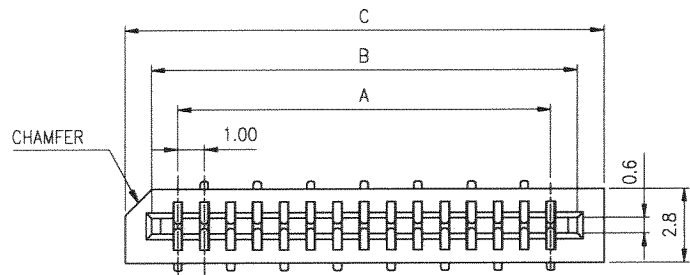

TOLERANCES: ±0.05
RECOMMENDED PCB LAYOUT

FPC/FFC T=0.30±0.05

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC.
CONTACT: COPPER ALLOY.
PLATING: ALL TIN, LEAD FREE.

ELECTRICAL

CURRENT RATING: 0.5 AMP.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN.
INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO 85°C.

PART NO.

FP3LSSxxTTOX

No. Of Circuits ——— Packing Option
T : Tube
R : Reel
P : Tap+Tube
Q : Tap+Reel

DIMENSION TABLE

Circuits	Dimension				Circuits	Dimension			
	A	B	C	L		A	B	C	L
2	1.00	3.1	5	4	20	19.00	21.1	23	12
3	2.00	4.1	6		21	20.00	22.1	24	
4	3.00	5.1	7		22	21.00	23.1	25	
5	4.00	6.1	8		23	22.00	24.1	26	
6	5.00	7.1	9	8	24	23.00	25.1	27	
7	6.00	8.1	10		25	24.00	26.1	28	
8	7.00	9.1	11		26	25.00	27.1	29	
9	8.00	10.1	12		27	26.00	28.1	30	
10	9.00	11.1	13	12	28	27.00	29.1	31	
11	10.00	12.1	14		29	28.00	30.1	32	
12	11.00	13.1	15		30	29.00	31.1	33	
13	12.00	14.1	16		31	30.00	32.1	34	
14	13.00	15.1	17	12	32	31.00	33.1	35	
15	14.00	16.1	18		33	32.00	34.1	36	
16	15.00	17.1	19		34	33.00	35.1	37	
17	16.00	18.1	20		35	34.00	36.1	38	
18	17.00	19.1	21	12	36	35.00	37.1	39	
19	18.00	20.1	22						

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw

THIRD ANGLE PROJECTION

DESIGN UNITS
mm INCH

TITLE: FPC/FFC 1.0 PITCH NON ZIF TOP ENTRY DUAL CONTACT
SMT TYPE - STANDARD PCB LAYOUT

GENERAL TOLERANCES:

DRAWN

游熾瑩

DATE 96/05/24

SIZE:

A4

SCALE:

FREE

SHEET:

1/1

PARTS NO.:

FP3LSSxxTTOX

X. ±0.40

CHECK

李如益

DATE 96.5.24

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

APPROVE

陳世官

DATE 96.5.24

CPN NO.:

DAN NO.: S9605-041

DWG NO.:

JAWS-SOP-FP3L001

REV.

01