


RoHS
Compliant

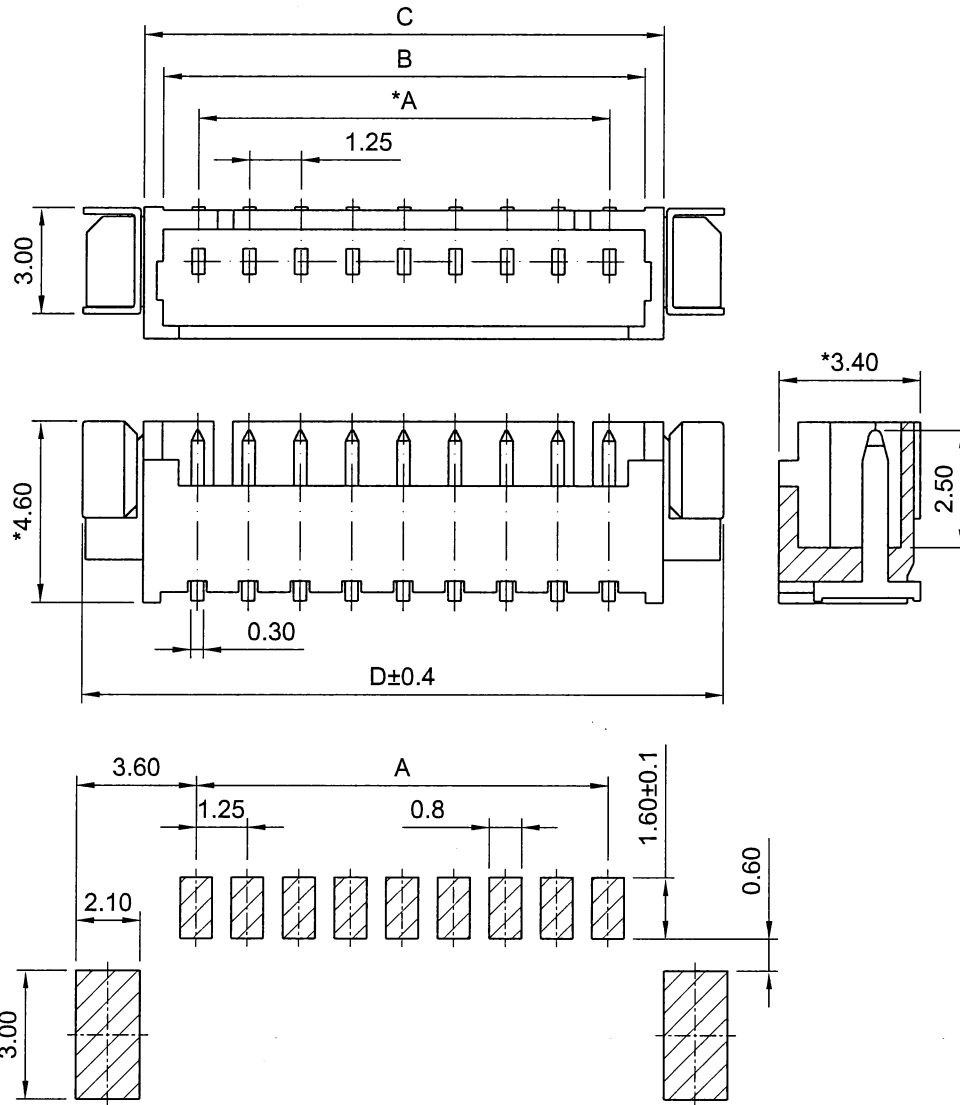

Recommended P.C.B. Layout

Specifications

Current & Voltage Rating : 1A & 125Vac max.
 Insulation Resistance : 100 MΩ min.
 Contact Resistance : 20 mΩ max.
 Dielectric Withstanding : AC 250 V
 Operating Temperature : -25°C ~ +85°C
 Contact Material : Phosphor Bronze
 Pad Material : Brass
 Insulator Material : Nylon 46, UL 94V-0 (White)
 Finish : Tin plated over Nickel
 Packing : Tube

125C-SR-xxT

No. of contacts

No. of contacts	Dim. A	Dim. B	Dim. C	Dim. D
02	1.25	3.05	4.25	7.65
03	2.50	4.30	5.50	8.90
04	3.75	5.55	6.75	10.15
05	5.00	6.80	8.00	11.40
06	6.25	8.05	9.25	12.65
07	7.50	9.30	10.50	13.90
08	8.75	10.55	11.75	15.15
09	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

JAWS 兆旭股份有限公司
 JAWS CO., LTD.

7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,
 New Taipei City 221, Taiwan (R.O.C.)
 TEL:886-2-2692-2898
 FAX:886-2-2692-2618
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION
 DESIGN UNITS
 ■ mm □ INCH

SIZE: A4 SCALE: FREE SHEET: 1/1
 CPN : DAN NO.: S10010-022

TITLE:
 1.25mm Wafer SMT Side Entry

PARTS NO.: 125C-SR-xxT
 DWG NO.: JAWS-SOP-125C001
 REV. 01

GENERAL TOLERANCES:
 X. ±N/A
 X.X ±0.30
 X.XX ±0.20
 ANGLE ±N/A

DRAWN	游熾瑩	DATE	2011/10/31
CHECKED	Wang	DATE	2011/10/31
APPROVED	Alien	DATE	2011/10/31