

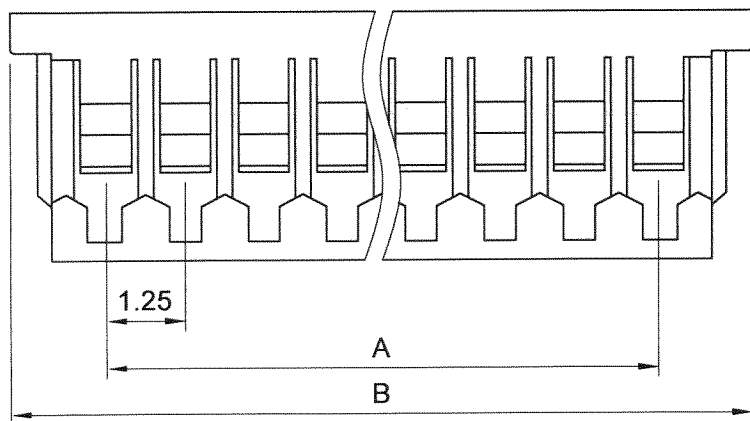


RoHS
Compliant
2002/95/EC

SPECIFICATIONS

CURRENT RATING : 1A AC, DC
 VOLTAGE RATING : 125V AC/ MAX.
 OPERATING TEMP : -20°C ~ +85°C
 INSULATION RESISTANCE : 100MΩ MIN.
 DIELECTRIC WITHSTANDING VOLTAGE : 250V AC/ MIN.
 CONTACT RESISTANCE : 20mΩ MAX.
 MATERIAL : NYLON 66, UL94V-0

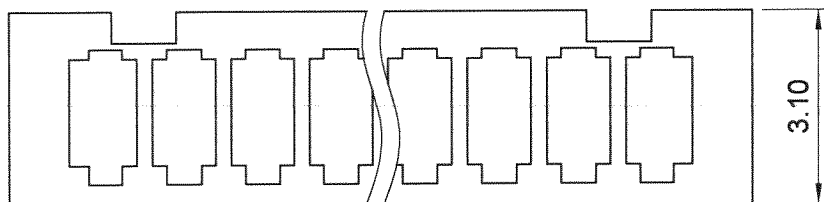

POLES	DIMENSION (mm)	
	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw

THIRD ANGLE
PROJECTION

DESIGN UNITS
mm INCH

TITLE:
1.25mm WIRE-TO-BOARD HOUSING

GENERAL TOLERANCES:

DRAWN 游熾瑩 DATE 97/10/21

SIZE: A4 SCALE: FREE SHEET: 1/1

PARTS NO.: 125C-xxP

±0.30

CHECK Wang DATE 97.10.21

CPN NO.: DAN NO.: S9710-039

DWG NO.: JAWS-SOP-125C005 REV. 01

APPROVE 陳世寬 DATE 97.10.21