
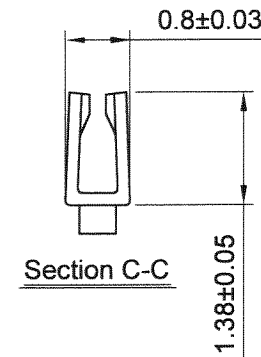


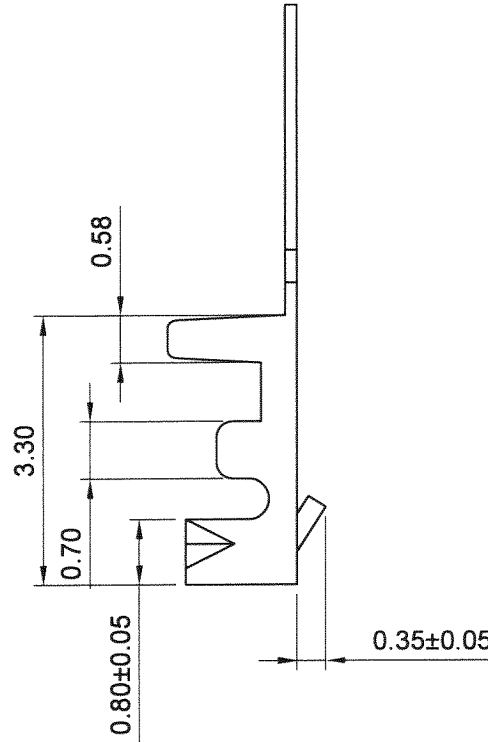


RoHS
Compliant
2002/95/EC


SPECIFICATIONS

CURRENT RATING : 1A AC, DC
 VOLTAGE RATING : 100V AC,DC
 OPERATING TEMPERATURE : -25°C ~ +85°C
 INSULATOR RESISTANCE : 5000 MΩ MIN.
 DIELECTRIC WITHSTANDING : 500V AC MIN.
 CONTACT RESISTANCE : 20 mΩ MAX.
 MATERIAL : PHOSPHOR BRONZE, TIN PLATED
 WIRE RANGE : 28 TO 32 AWG.

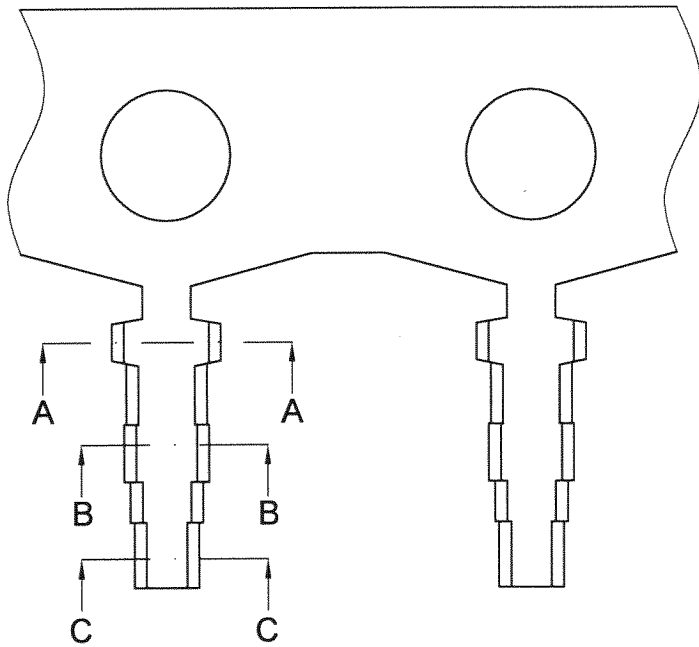

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw



THIRD ANGLE
PROJECTION

DESIGN UNITS
mm INCH

TITLE: 1.25mm WIRE TO BOARD
TERMINAL

GENERAL TOLERANCES:

±0.15

DRAWN	游熾瑩	DATE	98/08/26
CHECK	<i>[Signature]</i>	DATE	98.8.26
APPROVE	陳世庭	DATE	98.8.26

SIZE: A4	SCALE: FREE	SHEET: 1/1
CPN NO.:		DWG NO.:
DAN NO.: S9808-027		JAWS-SOP-125C006

PARTS NO.: 125C-T	REV. 01
-------------------	---------