




**HSF**  
Compliant

**Specifications**

Current & Voltage Rating : 2A & 100Vac max.  
 Insulation Resistance : 1000 MΩ min.  
 Contact Resistance : 20 mΩ max.  
 Dielectric Withstanding : AC 800 V  
 Operating Temperature : -25°C ~ +85°C  
 Material : Nylon 66, UL 94V-0

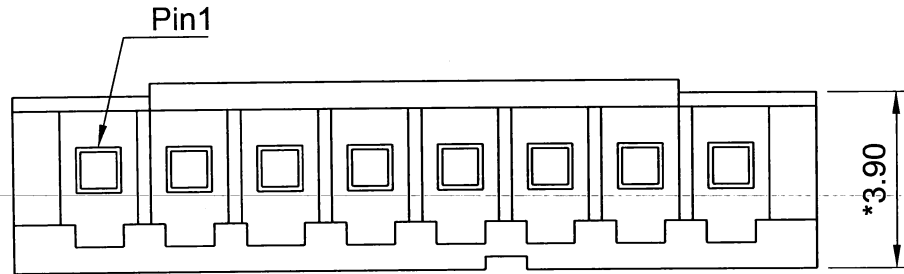

200F-xxP  
 ↳ No. of contacts

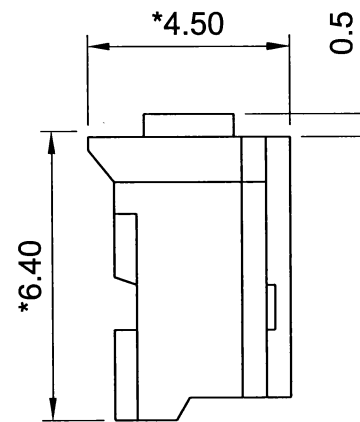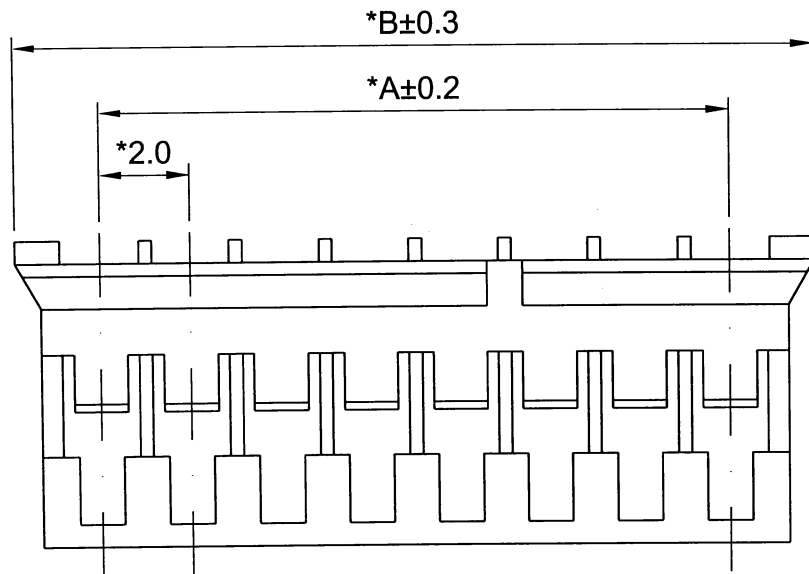

No. of contacts	Dimensions	
	A	B
2	2.00	5.80
3	4.00	7.80
4	6.00	9.80
5	8.00	11.80
6	10.00	13.80
7	12.00	15.80
8	14.00	17.80
9	16.00	19.80
10	18.00	21.80
11	20.00	23.80
12	22.00	25.80
13	24.00	27.80
14	26.00	29.80
15	28.00	31.80
16	30.00	33.80

**JAWS** 兆旭股份有限公司  
 JAWS CO., LTD.

7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,  
 New Taipei City 221, Taiwan (R.O.C.)  
 TEL:886-2-2692-2898  
 FAX:886-2-2692-2618  
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION

DESIGN UNITS  
 ■ mm □ INCH

SIZE: **A4** SCALE: **FREE** SHEET: **1/1**

CPN :  
 DAN NO.: S10012-016

TITLE:  
**2.0mm Crimping Housing**

PARTS NO.:  
**200F-xxP**

DWG NO.:  
**JAWS-SOP-200F001**

REV.  
**01**

GENERAL TOLERANCES:  
 X. ±0.30  
 X.X ±0.20  
 X.XX ±0.15  
 ANGLE ±N/A

DRAWN	游熾瑩	DATE	2011/12/20
CHECKED	<i>Wang</i>	DATE	2011/12/20
APPROVED	<i>陳世亨</i>	DATE	2011/12/20