




**HSF**  
Compliant

**Specifications**

Current Rating : 2A AC,DC  
 Voltage Rating : 250V AC,DC  
 Temperature Range : -25°C to +85 °C  
 Contact Resistance : 20mΩ max.  
 Insulation Resistance : 1000MΩ min.  
 Withstanding Voltage : 800V AC/minute  
 Material : Nylon 66, UL94V-0

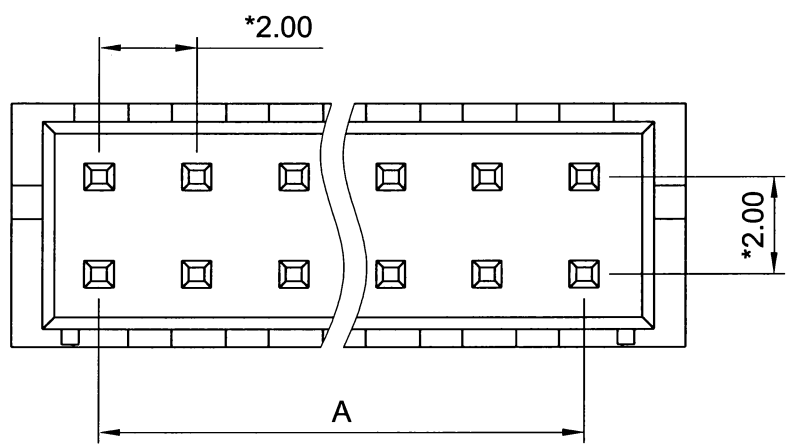

200F-xxPD  
 No. of contacts

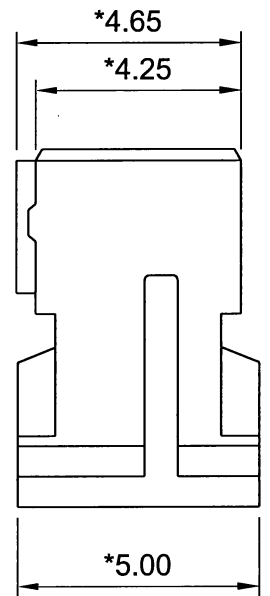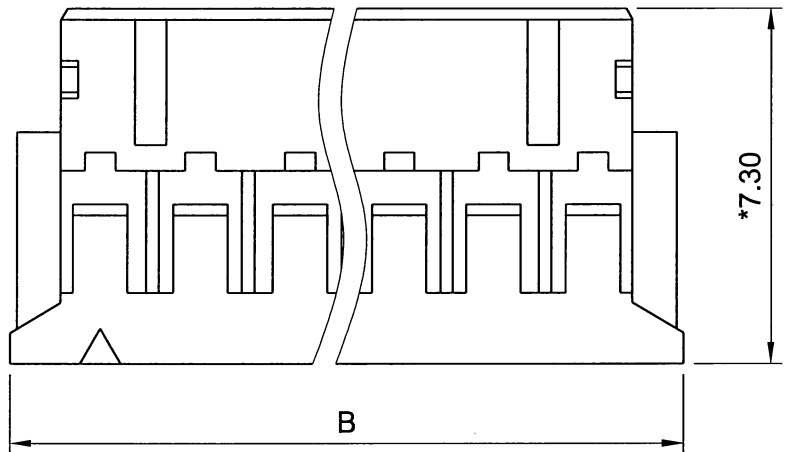

No. of contacts	Dimension	
	A	B
04	2.00	5.90
06	4.00	7.90
08	6.00	9.90
10	8.00	11.90
12	10.00	13.90
14	12.00	15.90
16	14.00	17.90
18	16.00	19.90
20	18.00	21.90
22	20.00	23.90
24	22.00	25.90
26	24.00	27.90
28	26.00	29.90
30	28.00	31.90
32	30.00	33.90
34	32.00	35.90
40	38.00	41.90

**JAWS** 兆旭股份有限公司  
**JAWS CO., LTD.**  
 7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,  
 New Taipei City 221, Taiwan (R.O.C.)  
 TEL:886-2-2692-2898  
 FAX:886-2-2692-2618  
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION  
 DESIGN UNITS  
 ■ mm □ INCH  
 SIZE: **A4** SCALE: **FREE** SHEET: **1/1**  
 CPN :  
 DAN NO.: **S10101-008**

TITLE:  
**2.0mm Wire-to-Board Housing**  
 PARTS NO.:  
**200F-xxPD**  
 DWG NO.:  
**JAWS-SOP-200F005**  
 REV. **01**

GENERAL TOLERANCES:  
 X. ±N/A  
 X.X ±0.35  
 X.XX ±0.25  
 ANGLE ±N/A

DRAWN	游熾瑩	DATE	2012/01/10
CHECKED	<i>Wang</i>	DATE	2012/01/10
APPROVED	<i>Wen</i>	DATE	2012/01/10