
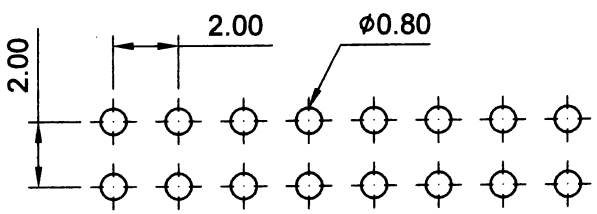
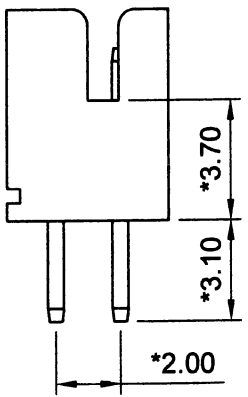
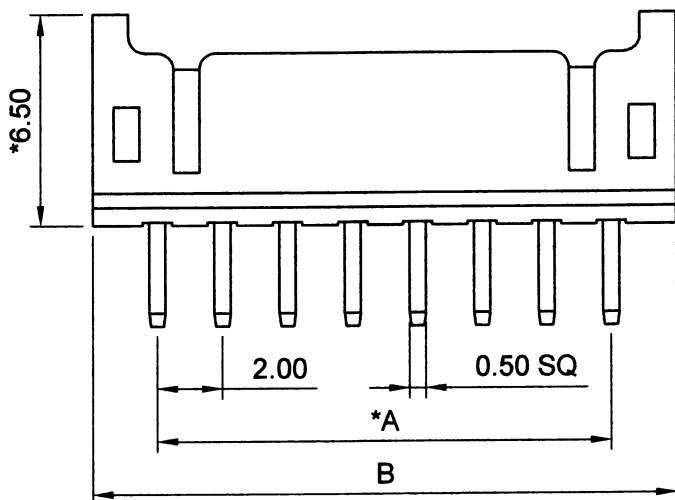


HSF
Compliant

REV.	DESCRIPTION	DATE	APPR.
02	ADD. 4 PIN	2009/05/19	陳世官
03	ADD. 34, 36, 38, 40 PIN	2009/07/28	陳世官

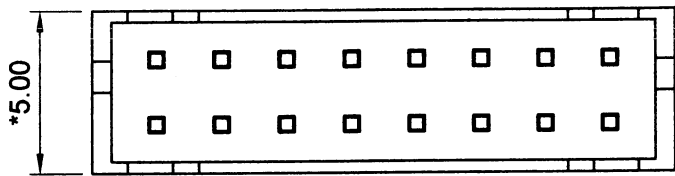

Recommended P.C.B. Layout

Specifications
 Current & Voltage Rating : 2A & 250V AC, DC
 Insulation Resistance : 1000 M Ω min.
 Contact Resistance : 20 m Ω max.
 Operating Temperature : -25°C ~ +85°C
 Contact Material : Brass
 Insulator Material : Nylon-66 + G.F., UL 94V-0 (Natural)
 Finish : Tin plated
 Packing : Bag

200F-WSD-xxT

△02 → No. of contacts

No. of contacts	Dimension	
	A	B
04	2.0	6.0
06	4.0	8.0
08	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0
32	30.0	34.0
34	32.0	36.0
36	34.0	38.0
38	36.0	40.0
40	38.0	42.0

△03

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,
New Taipei City 221, Taiwan (R.O.C.)
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw

THIRD ANGLE PROJECTION		DESIGN UNITS mm □ INCH
SIZE: A4	SCALE: FREE	SHEET: 1/1
CPN:		DWG NO.: JAWS-SOP-200F006
DAN NO.: S10104-042		REV. 03

TITLE: 2.0mm PHD Wafer
Dual Rows Top Entry

PARTS NO.: 200F-WSD-xxT

GENERAL TOLERANCES:	
X.	±N/A
X.X	±0.35
X.XX	±0.25
ANGLE	±N/A

DRAWN	林峻吉	DATE	2012/04/26
CHECKED	Wang	DATE	2012/04/26
APPROVED	Lin	DATE	2012/04/26