
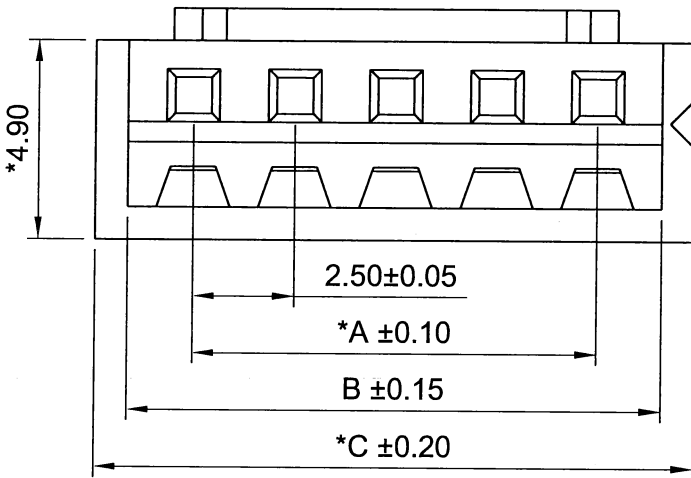
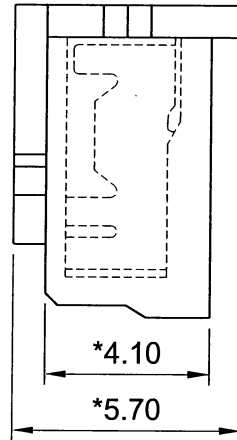


HSF
Compliant

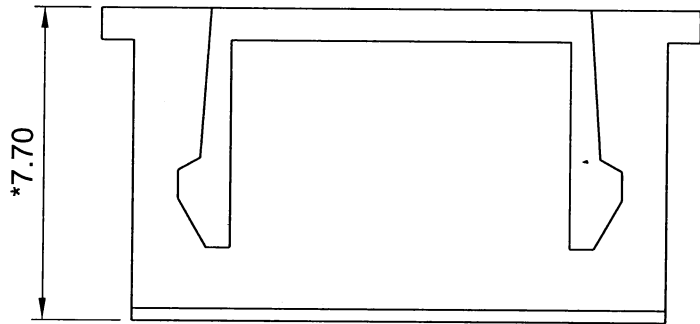

Specification

Circuit Size : 2 to 20

Current & Voltage Rating : 3A & 125V AC, DC

Insulation Resistance : 1000 MΩ min. at 500V DC

Contact Resistance : 20 mΩ max.

Dielectric Withstanding : AC 1000V for 1 minute

Operating Temperature : -25°C ~ +85°C

Insulator Material : Nylon-66, UL 94V-0 (White)

Applicable PC Board Thickness : 1.6mm

Packing : Bag

250B-xxP

└─ No. of contacts

| | |
|---|-------------------------------|
| A | 2.5 x (No. of contacts - 1) |
| B | 0.7 + 2.5 x No. of contacts |
| C | 2.3 + 2.5 x No. of contacts |

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,
New Taipei City 221, Taiwan (R.O.C.)
TEL:886-2-2692-2898
FAX:886-2-2692-2618
Http://www.jaws.com.tw



THIRD ANGLE
PROJECTION

DESIGN UNITS
■ mm □ INCH

SIZE: **A4** SCALE: **FREE** SHEET: **1/1**

CPN :
DAN NO.: S10104-034

TITLE:
2.50mm Crimping Housing

PARTS NO.:
250B-xxP

DWG NO.:
JAWS-SOP-250B005

REV.
01

GENERAL TOLERANCES:
X. ±0.20
X.X ±0.15
X.XX ±0.10
ANGLE ±N/A

DRAWN

林峻吉

DATE

2012/04/23

CHECKED

Wang

DATE

2012/04/23

APPROVED

Wang

DATE

2012/04/23