
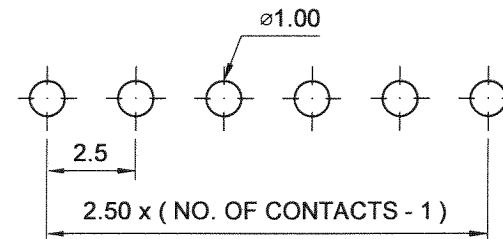
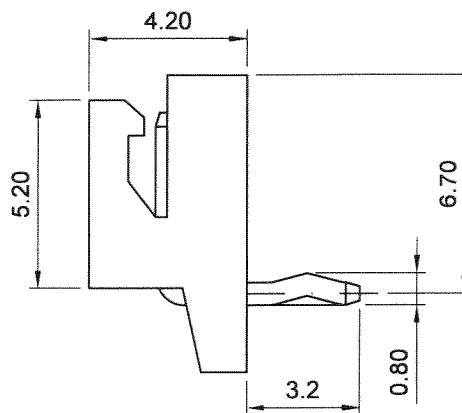
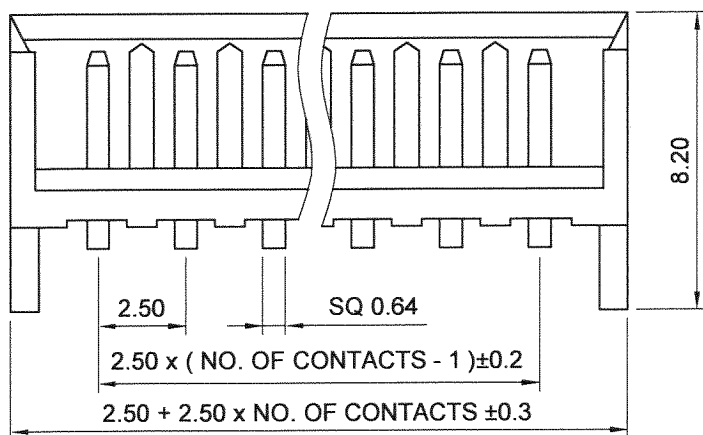


RoHS
Compliant
2002/95/EC

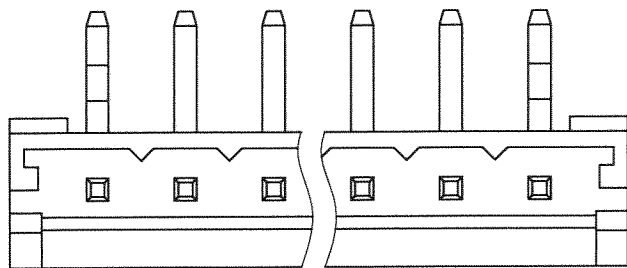

P.C. BOARD LAYOUT

SPECIFICATIONS

ELECTRICAL


CURRENT RATING: 2.5A AC, DC
VOLTAGE RATING: 250V AC/ MAX.
OPERATING TEMP.: -25°C ~ +85°C
INSULATION RESISTANCE: 1000 MΩ/ MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 800V AC/ MIN.
CONTACT RESISTANCE: 10 mΩ/ MAX.

MATERIAL

TERMINAL MATERIAL : BRASS, COPPER-UNDERCOATED,
TIN PLATED
MATERIAL: NYLON 66, UL94V-0

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw



DESIGN UNITS
mm INCH

TITLE: 2.5mm Wire-to-Board Header
DIP 90° Type

GENERAL TOLERANCES:

±0.30

SIZE: A4
SCALE: FREE
SHEET: 1/1
CPN NO.:
DAN NO.: S9710-043

PARTS NO.: 250C-WR-xxT
DWG NO.: JAWS-SOP-250C002
REV. 01

DRAWN	游熾瑩	DATE	97/10/28
CHECK	Wang	DATE	97/10/29
APPROVE	陳世官	DATE	97.10.29