
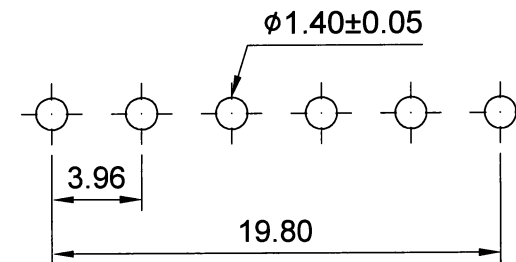
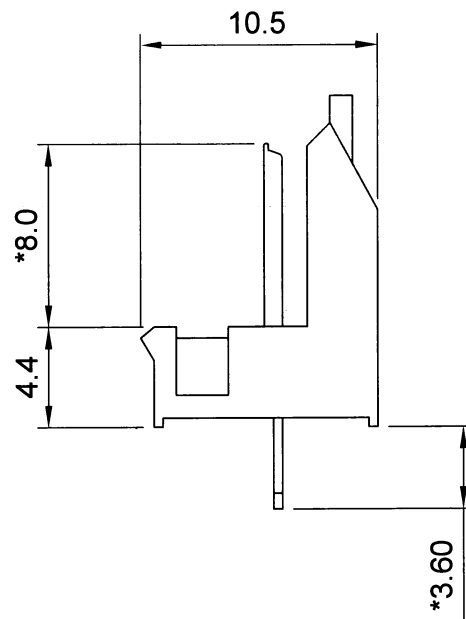
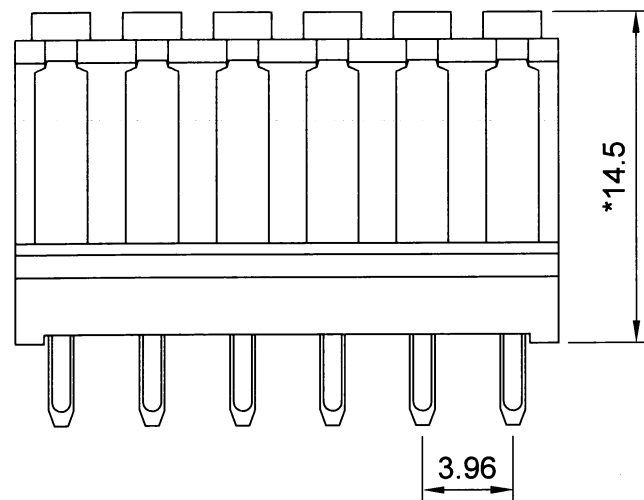


HSF
Compliant

Specifications

Current & Voltage Rating : 7A & 250V AC, DC
 Insulation Resistance : 1000 MΩ min.
 Dielectric Withstanding : AC 1500V / minute
 Operating Temperature : -25°C ~ +85°C
 Contact Material : Brass
 Insulator Material : Nylon-66, UL94V-2 (White)
 Finish : Gold plated
 Packing : Bag

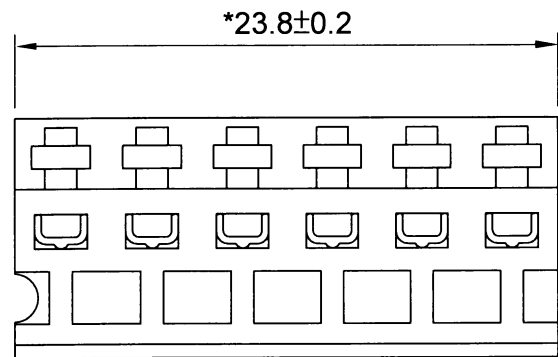

Recommended P.C.B. Layout

JAWS 兆旭股份有限公司
JAWS CO., LTD.
 7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,
 New Taipei City 221, Taiwan (R.O.C.)
 TEL:886-2-2692-2898
 FAX:886-2-2692-2618
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION

DESIGN UNITS
 mm INCH

TITLE:
3.96mm Wafer Top Entry

GENERAL TOLERANCES:

X. ±0.50
 X.X ±0.25
 X.XX ±0.20
 ANGLE ±N/A

DRAWN	林峻吉	DATE	2012/10/23
CHECKED	Wang	DATE	2012/10/23
APPROVED	Wes	DATE	2012/10/23

SIZE: **A4** SCALE: **FREE** SHEET: **1/1**
 CPN :
 DAN NO.: S10110-061

PARTS NO.: **396D-WS-06G**
 DWG NO.: **JAWS-SOP-396D002** REV. **01**