
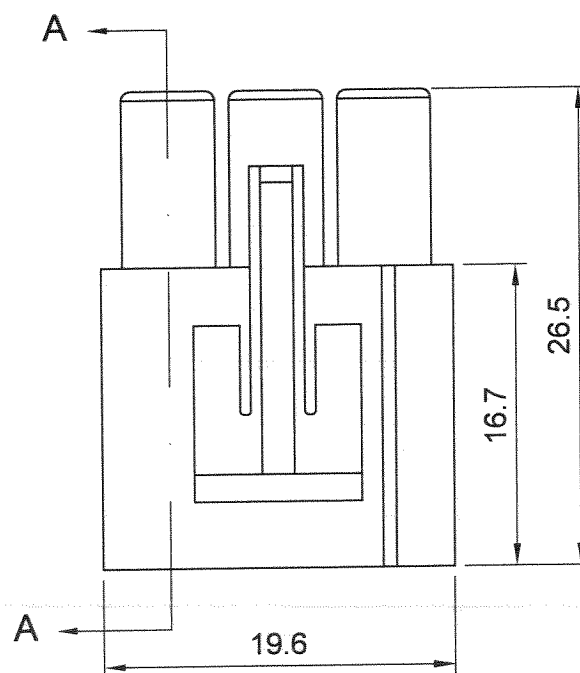
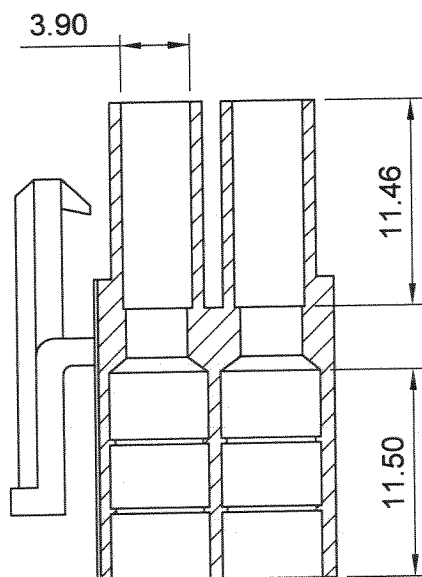


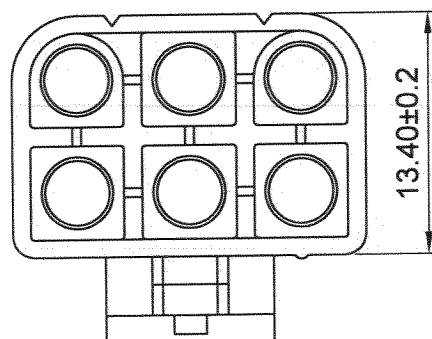

SPECIFICATIONS

POLES : 6 POLES

CURRENT RATING : 5A

VOLTAGE RATING : 250V AC,DC

TEMPERATURE RANGE : -25°C ~ +85°C

CONTACT RESISTANCE : INITIAL VALUE/ 10mΩ MAX.

AFTER ENVIRONMENTAL TESTING / 20mΩ

WITHSTAND VOLTAGE : 1500V AC / MINUTE

INSULATION RESISTANCE : 1000 MΩ MIN.

MATERIAL : NYLON UL94V-0, UL 94V-2

SUITABLE 4200A-TF SERIES TERMINAL

MATES WITH 4200A-2x3F HOUSING

JAWS® 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL:886-2-2692-2898
FAX:886-2-2692-2618
Http://www.jaws.com.tw



THIRD ANGLE
PROJECTION

DESIGN UNITS
■ mm □ INCH

SIZE:

A4

SCALE:

FREE

SHEET:

1/1

CPN NO.:

DAN NO.: S9712-017

TITLE: Ø 2.0mm WIRE TO WIRE
HOUSING, MALE

PARTS NO.:

4200A-2x3M

DWG NO.:

JAWS-SOP-4200A002

REV.

01

GENERAL TOLERANCES:

X.X ±0.25

X.XX ±0.13

X.XXX ±0.08

ANGLE ±N/A

DRAWN

游熾瑩

DATE 97/12/12

CHECK

Lang

DATE 97/12/16

APPROVE

陳世宏

DATE 97.12.18