


RoHS  
Compliant  
2002/95/EC

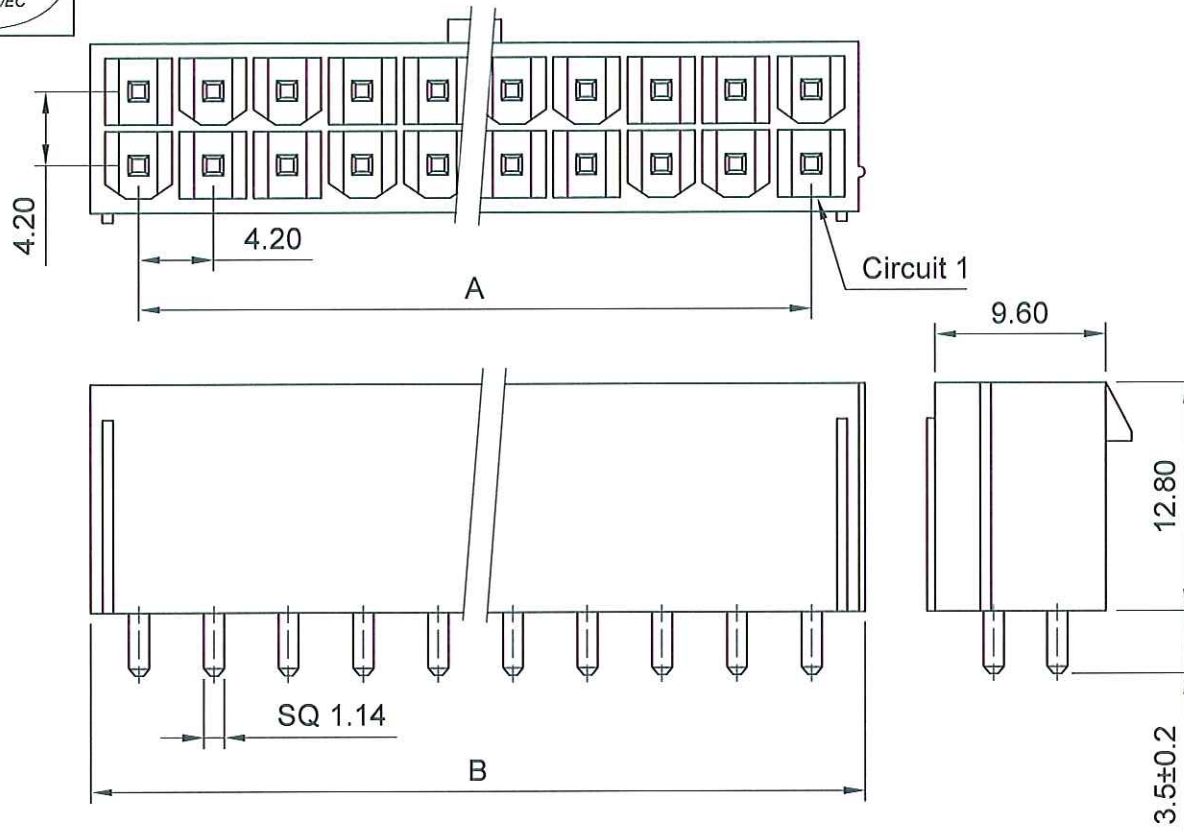

### Specifications

Circuits : 2-24 circuits available

Current Rating : 9A AC/DC

Voltage Rating : 600V AC/DC


Insulator Resistance : 1000 MΩ min.

Withstand Voltage : 1500V AC/minute

Contact Material : Brass , Tin plated

Insulator Material : Nylon 66, UL 94V-2

RARTS NO.	Dim. A	Dim. B
4420A-WS-02T-B	-	5.40
4420A-WS-04T-B	4.20	9.60
4420A-WS-06T-B	8.40	13.80
4420A-WS-08T-B	12.60	18.00
4420A-WS-10T-B	16.80	22.20
4420A-WS-12T-B	21.00	26.40
4420A-WS-14T-B	25.20	30.60
4420A-WS-16T-B	29.40	34.80
4420A-WS-18T-B	33.60	39.00
4420A-WS-20T-B	37.80	43.20
4420A-WS-22T-B	42.00	47.40
4420A-WS-24T-B	46.20	51.60

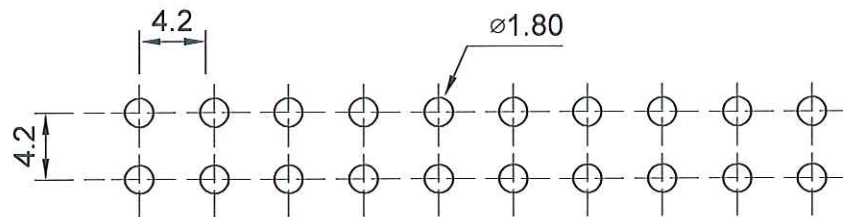

Recommended P.C.B. Layout

**JAWS** 兆旭股份有限公司  
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,  
Hsichih, Taipei Hsien, Taiwan.  
TEL:886-2-2692-2898  
FAX:886-2-2692-2618  
Http://www.jaws.com.tw

THIRD ANGLE  
PROJECTION

DESIGN UNITS  
■ mm □ INCH

SIZE:

A4

SCALE:

FREE

SHEET:

1/1

TITLE: 4.2mm Wafer  
Dual Rows, Straight Type (SQ pin)

PARTS NO.:

4420A-WS-xxT-B

DWG NO.:

JAWS-SOP-4420A011

REV.

01

GENERAL TOLERANCES:

X.X ±0.50

X.XX ±0.25

X.XXX ±0.10

ANGLE ±2°

DRAWN

游燕莹

DATE 2010/03/03

CHECK

*Don*

DATE 2010/03/03

APPROVE

*Wey*

DATE 2010/03/03