
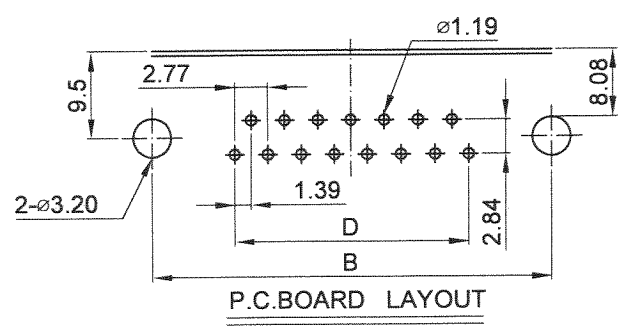

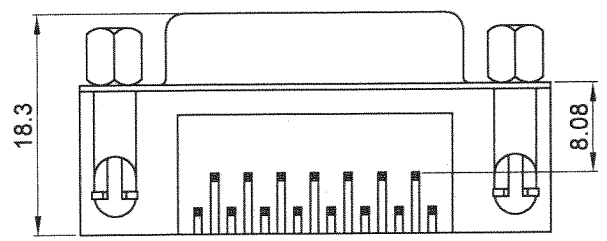


RoHS
Compliant
2002/95/EC

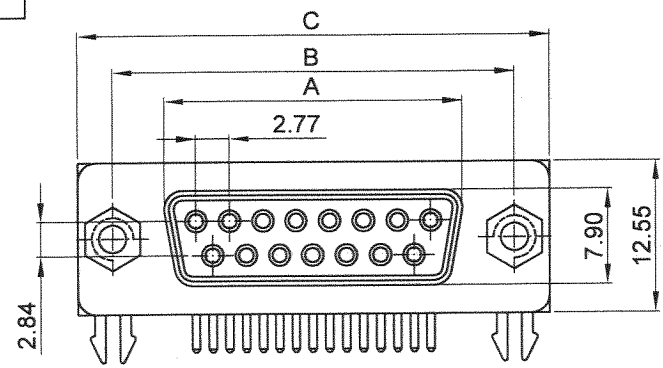

MATERIAL
 INSULATOR : PBT+30% GLASS FIBER (UL94V-0)BLACK
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : SEE ORDER INFORMATION
 SHELL FINISH: STEEL,NICKEL PLATED

SPECIFICATION
 CURRENT RATING : 5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE : AC 1000 V
 INSULATION RESISTANCE : 1000MΩ MIN AT 500VDC
 CONTACT RESISTANCE : 15mΩ MAX.
 OPERATING TEMPERATURE : -25°C ~ +85°C

DBR2QxxFGxAQV00
 GF : 0.6μ" GOLD PLATED
 GT : 0.6μ" GOLD PLATED ON CONTACT,
 TIN PLATED ON SOLDER.

| PARTS NO. | A±0.20 | B±0.25 | C±0.38 | D |
|-----------------|--------|--------|--------|-------|
| DBR2Q09FGxAQV00 | 16.33 | 24.99 | 30.80 | 11.08 |
| DBR2Q15FGxAQV00 | 24.66 | 33.32 | 39.10 | 19.39 |
| DBR2Q25FGxAQV00 | 38.38 | 47.04 | 53.00 | 33.24 |
| DBR2Q37FGxAQV00 | 54.84 | 63.50 | 69.32 | 49.86 |

504A-S-xxF-G/GT

JAWS 兆旭股份有限公司
 JAWS CO., LTD.
 7F-1, NO.31, Lane 169, Kang Ning Street,
 Hsichih, Taipei Hsien, Taiwan.
 TEL:886-2-2692-2898
 FAX:886-2-2692-2618
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION
 DESIGN UNITS
 ■ mm □ INCH

SIZE: A4 SCALE: FREE SHEET: 1/1

CPN NO.:
 DAN NO.: S9611-035

TITLE: D-SUB CONN. RIGHT ANGLE FEMALE TYPE

PARTS NO.: DBR2QxxFGxAQV00

DWG NO.: JAWS-SOP-DBR2Q001

REV. 02

GENERAL TOLERANCES : ±0.30

| | | | |
|---------|-----|------|----------|
| DRAWN | 游熾瑩 | DATE | 96/11/13 |
| CHECK | 郭坤峰 | DATE | 96/11/14 |
| APPROVE | 陳世官 | DATE | 96.11.14 |