


RoHS
Compliant
2002/95/EC

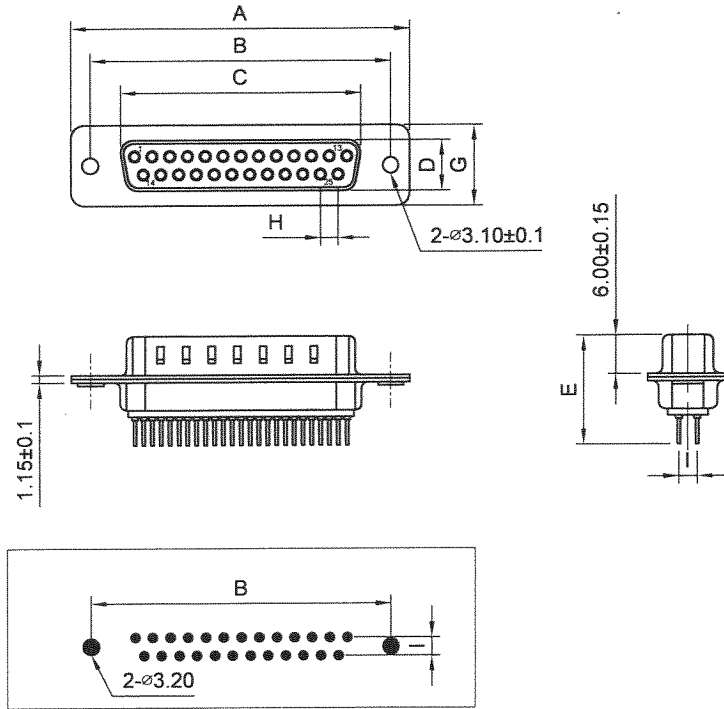

P.C. BOARD LAYOUT

A,B	前鉚型	C	后鉚型	I,K	后鉚型(魚叉)

NOTE:

1.MATERIAL:

- 1.1 INSULATOR : HIGH TEMPERATURE
(THERMOPLASTIC WITH G.F,UL94V-0)
- 1.2 CONTACT : COPPER ALLOY ,T=0.20mm
- 1.3 SHELL : SPEC ,T=0.30mm
- 1.4 CONTACT : 0.6μ" GOLD PLATED

2.SPECIFICATIONS

- 2.1 CURRENT RATING : 1 A MAX.
- 2.2 DIELECTRIC WITHSTANDING
VOLTAGE : 750 V(AC) FOR 1 MIN.
- 2.3 CONTACT RESISTANCE : 30 mΩ MAX.
- 2.4 INSULATION RESISTANCE : 1000 MΩ MIN.
- 2.5 TOTAL MATING FORCE : 7.0 Kgf MAX.
- 2.6 TOTAL UNMATING FORCE : 1.5 Kgf MIN.
- 2.7 TEMPERATURE RANGE : -40°C ~ +105°C

DBS2XxxMGxAxV00

- S : 白色
- Q : 黑色
- GF : SOLDER 0.6μ" GOLD PLATED
- GT : SOLDER 120μ" TIN PLATED
- NO. OF CONTACTS
- A : 前鉚銅柱 (不通孔)
- B : 前鉚銅柱 (通孔)
- C : 後鉚銅柱 (通孔)
- I : 後鉚魚叉銅柱附螺絲
- K : 後鉚魚叉銅柱鎖螺絲

PART NO.	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	G±0.25	H±0.05	I±0.10
09M	30.81	24.99	16.92	8.38	16.9	12.55	2.77	2.84
15M	39.25	33.32	25.25	8.38	16.9	12.55	2.77	2.84
19M	44.80	38.86	30.6	8.38	16.9	12.55	2.77	2.84
23M	50.30	44.3	35.9	8.38	16.9	12.55	2.77	2.84
25M	53.04	47.04	38.96	8.38	16.9	12.55	2.77	2.84
37M	69.50	63.50	55.42	8.38	16.9	12.55	2.77	2.84

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw

THIRD ANGLE
PROJECTION

DESIGN UNITS
mm INCH

TITLE:
D-SUB PCB 180° TYPE (MALE)

GENERAL TOLERANCES:

DRAWN	游熾瑩	DATE	96/09/27
CHECK	郭坤峰	DATE	96/9/27
APPROVE	陳世官	DATE	96.10.3

SIZE: A4	SCALE: FREE	SHEET: 1/1
CPN NO.:	DWG NO.:	
DAN NO.: S9609-036	JAWS-SOP-DBS2X001	

PARTS NO.:	REV.
DBS2XxxMGxAxV00	03

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
ANGLE	±1°