
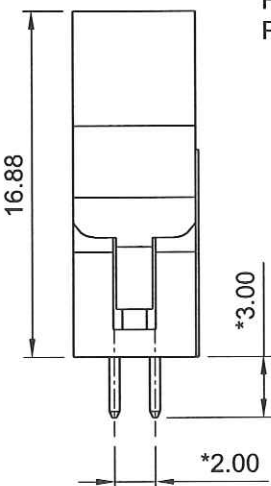
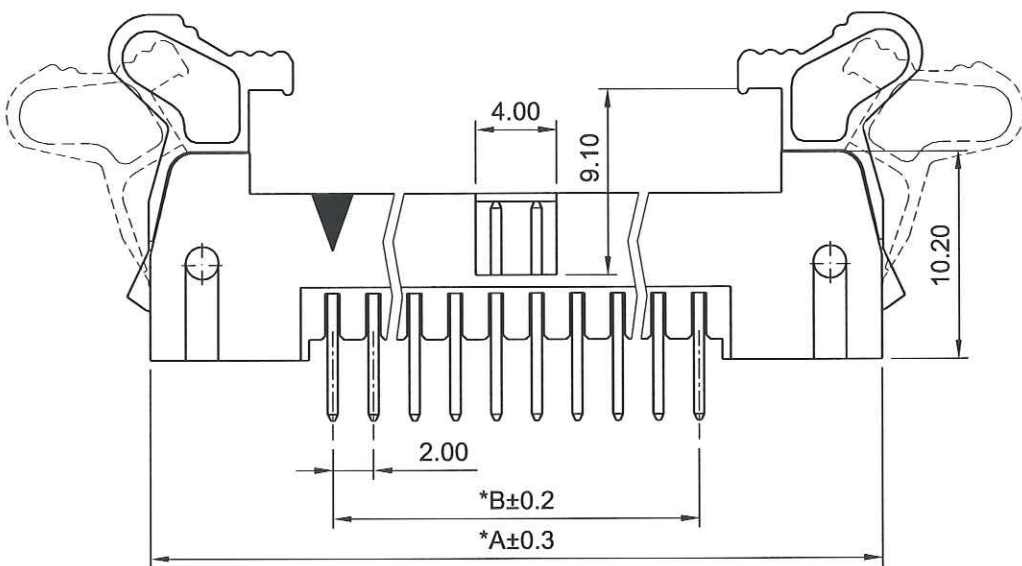


HSF
Compliant


Specifications
 Current & Voltage Rating : 1A
 Insulation Resistance : 1000 MΩ min.
 Contact Resistance : 20 mΩ max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Max. Processing Temp. : 245±5°C for 3~5 seconds (NY6T / NY9T)
 Contact Material : Brass
 Insulator Material : Nylon-6T(H.F.) / Nylon-9T,
 UL 94V-0 (Black)
 Finish : 0.6μ" Gold plated on contact area
 Packing : Tray

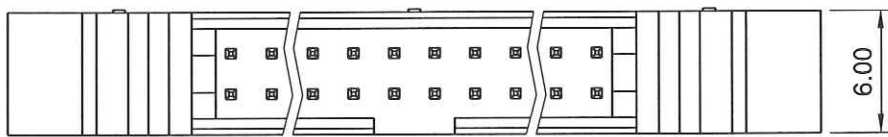

LH2RA1xxGFxA001V

Material
 G : Nylon-9T + Brass (standard)
 Y : Nylon-6T(H.F.) + Brass

No. of contacts

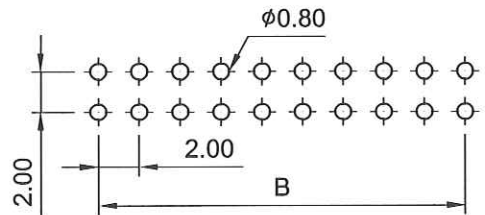

Recommended P.C.B. Layout

No. of contacts	Dimension	
	A	B
10	25.7	8.0
12	27.7	10.0
14	29.7	12.0
16	31.7	14.0
20	35.7	18.0
22	37.7	20.0
24	39.7	22.0
26	41.7	24.0
30	45.7	28.0
34	49.7	32.0
40	55.7	38.0
44	59.7	42.0
50	65.7	48.0

JAWS 兆旭股份有限公司
 JAWS CO., LTD.
 7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,
 New Taipei City 221, Taiwan (R.O.C.)
 TEL: 886-2-2692-2898
 FAX: 886-2-2692-2618
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION
 DESIGN UNITS: mm INCH
 SIZE: A4 SCALE: FREE SHEET: 1/1
 CPN: DAN NO.: P10109-034

TITLE: 2.0mm Latch Header Straight Type
 PARTS NO.: LH2SA1xxGFxA001V
 DWG NO.: JAWS-SOP-LH007
 REV. 01

GENERAL TOLERANCES: ±0.30
 DRAWN: 林峻吉 DATE: 2012/09/19
 CHECKED: 林金長 DATE: 2012/09/19
 APPROVED: [Signature] DATE: 2012/09/19