
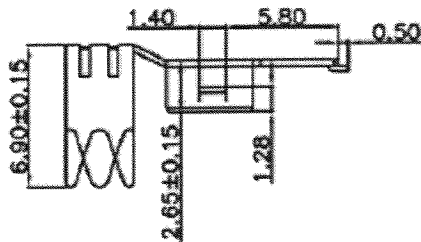




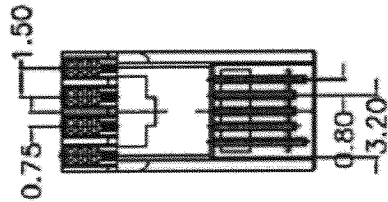
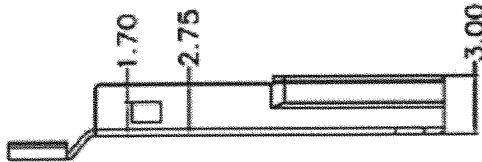



RoHS
Compliant
2002/95/EC

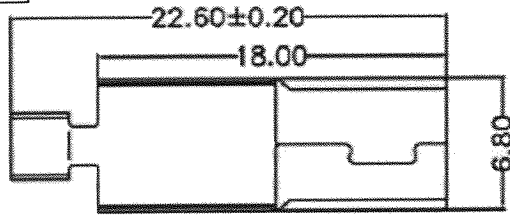

NOTES :


1. MATERIAL :
INSULATOR : P.B.T + 30%G.F. UL 94V-0
CONTACT : BRASS
SHELL : SPCC
2. MECHANICAL :
MATING : 35 MAX.
WITHDRAWAL FORCE : 7 N MIN.
DURABILITY : 5000 CYCLES MIN.
3. ELECTRICAL :
CURRENT-MAX [AMPS] : 1.0A
VOLTAGE-MAX[VOLTS] : 30V
WITHSTANDING VOLTAGE : 100V AC.
CONTACT RESISTANCE [OHMS] : 50 mΩ MAX.
INSULATION RESISTANCE [OHMS] : 100 MΩ MIN.
4. PLATING :
CONTACTS : SEE ORDER INFORMATIONS.
SOLDER : 120μ" TIN PLATED
SHELL : NICKEL OVER ALL PLATING
5. ENVIRONMENTAL :
TEMPERATURE RANG : -55°C TO +85°C

UBMQ10005xxAQV1

- GT : 1μ" GOLD PLATED ON CONTACT (USB 1.1)
- GU : 30μ" GOLD PLATED ON CONTACT (USB 2.0)

JAWS 兆旭股份有限公司
JAWS CO., LTD.

7F-1, NO.31, Lane 169, Kang Ning Street,
Hsichih, Taipei Hsien, Taiwan.
TEL: 886-2-2692-2898
FAX: 886-2-2692-2618
Http://www.jaws.com.tw



THIRD ANGLE
PROJECTION

DESIGN UNITS
mm INCH

SIZE: A4
SCALE: FREE
SHEET: 1/1
CPN NO.:
DAN NO.: S9709-042

TITLE: MINI USB MINI B TYPE
SOLDER 5P (MALE)

PARTS NO.:
UBMQ10005xxAQV1

DWG NO.:
JAWS-SOP-UB013

GENERAL TOLERANCES :

±0.30

DRAWN	游熾瑩	DATE	97/09/23
CHECK	郭冲學	DATE	97.9.23
APPROVE	陳世官	DATE	97.9.24

REV.
01