



Dimensions in mm

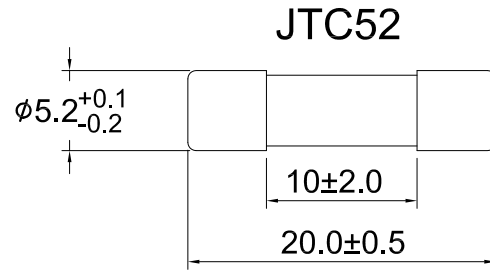


JTC52-PA

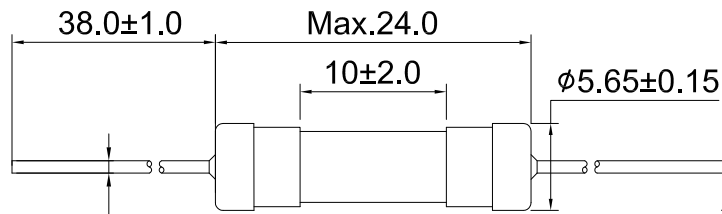

Dia. of Lead wire
 0~15A $\phi 0.8 \pm 0.05$
 16A~30A $\phi 1.2 \pm 0.05$

JTC52-PR

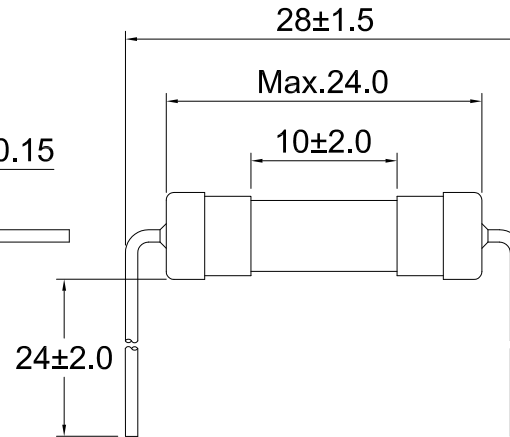

Rated Current	Breaking capacity	Rated Voltage	JTC52-PR/PA JET	
0.1A		125V/250V		
0.125A		125V/250V		
0.16A		125V/250V		
0.2A		125V/250V		
0.25A		125V/250V		
0.3A		125V/250V		
0.315A		125V/250V		
0.4A		125V/250V		
0.5A		125V/250V		
0.6A		125V/250V		
0.63A		125V/250V		
0.7A		125V/250V		
0.8A		125V/250V		
1A		@125V/AC 100A	125V/250V	○
1.25A			125V/250V	○
1.5A		@250V/AC 100A	125V/250V	○
1.6A		125V/250V	○	
2A		125V/250V	○	
2.5A		125V/250V	○	
3A		125V/250V	○	
3.15A		125V/250V	○	
3.5A		125V/250V	○	
4A		125V/250V	○	
5A		125V/250V	○	
6A		125V/250V	○	
6.3A		125V/250V	○	
7A		125V/250V	○	
8A		125V/250V	○	
10A		125V/250V	○	
12A		125V/250V	○	
13A		125V/250V	○	
15A		125V/250V	○	
16A		250V	○	
20A	@250V/AC 300A	250V	○	
25A		250V	○	
30A		250V	○	

Test standards according to
 JIS C6575-2: J-1/J-2 B Type 1999
 Electrical Characteristic

Rated Current	$1.3 I_n$	$1.6 I_n$	$2 I_n$
I_n	Min.	Max.	Max.
0.1A~30A	90 min	60 min	2 min

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN mm
 TOLERANCE
 DECIMALS ANGULAR
 X ± 0.5 $\pm 2^\circ$
 XX ± 0.25
 DO NOT SCALE DRAWING



P/N	
REV	D

CUSTOMER NO.	
DRAWN BY	Jason
CHECKED BY	
APPROVED BY	鄭文和
DATE	2014.2.21
SCALE	

JENN FENG ELECTRIC INDUSTRIAL CO., LTD.	
TITLE	5.2X20mm Miniature Cartridge Fuse
PART NO.	JTC52, JTC52-PA, JTC52-PR
DRAWING NO.	AA05062107