



MFG46

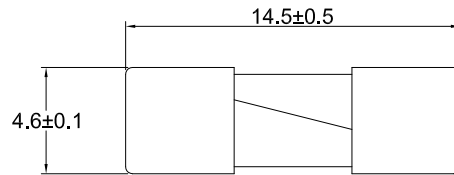

MFG46-PA

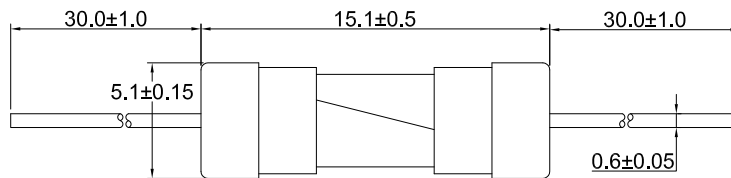

Test standards according to
UL 248-1,14 CSA-C22.2 No.248.1,14
Electrical Characteristic



Rated Current	Rated Voltage	Breaking capacity	cULus	
			MFG46	MFG46-PA
100mA	125/250 V	@125V/AC 10KA @250V/AC 35A	○	○
125mA	125/250 V		○	○
150mA	125/250 V		○	○
175mA	125/250 V		○	○
187.5mA	125/250 V		○	○
* 200mA	125/250 V		○	○
250mA	125/250 V			○
300mA	125/250 V			
375mA	125/250 V			
400mA	125/250 V		* @350V/AC 100A	
500mA	125/250 V			
600mA	125/250 V			
700mA	125/250 V			
750mA	125/250 V			
800mA	125/250 V			
1A	125/250 V			
1.125A	125/250 V	@125V/AC 10KA @250V/AC 100A		
1.25A	125/250 V			
1.5A	125/250 V			
1.6A	125/250 V			
1.75A	125/250 V			
1.8A	125/250 V			
* 2A	125/250 V			○
* 2.25A	125/250 V			○
* 2.5A	125/250 V			○
* 3A	125/250 V			○
* 3.15A	125/250 V		○	
* 3.2A	125/250 V		○	
* 3.5A	125/250 V		○	
* 4A	125/250 V	@125V/AC 10KA @250V/AC 200A	○	○
* 4.5A	125/250 V		○	○
* 5A	125/250 V		○	○
* 6A	125/250 V		○	○
* 6.3A	125/250 V		○	○
* 7A	125/250 V		○	○

* PS:MFG46-200mA cULus Approvals 125V/250V/350V
MFG46-2A cULus Approvals 125V/250V
MFG46-2.25A~7A cULus Approvals only 125V

Rated Current	1.0 In	1.35 In	2 In	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2° XX ± 0.25 DO NOT SCALE DRAWING 	CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD.
In	Min.	Max.	Max.		DRAWN BY Jason	
100mA~3A	4 h	60 min	120 sec	P/N	CHECKED BY	Miniature Cartridge Fuse4.6X14.5mm
				REV B	APPROVED BY 鄭文和	PART NO. MFG46 ,MFG46-PA
					DATE 2012.10.4	DRAWING NO. AA05031802
					SCALE	