| REVISION | | | | |
|---|---|---|---|---|
| SYM | ECN NO. | DESCRIPTION | DATE | APPROVED |
| | | | | |

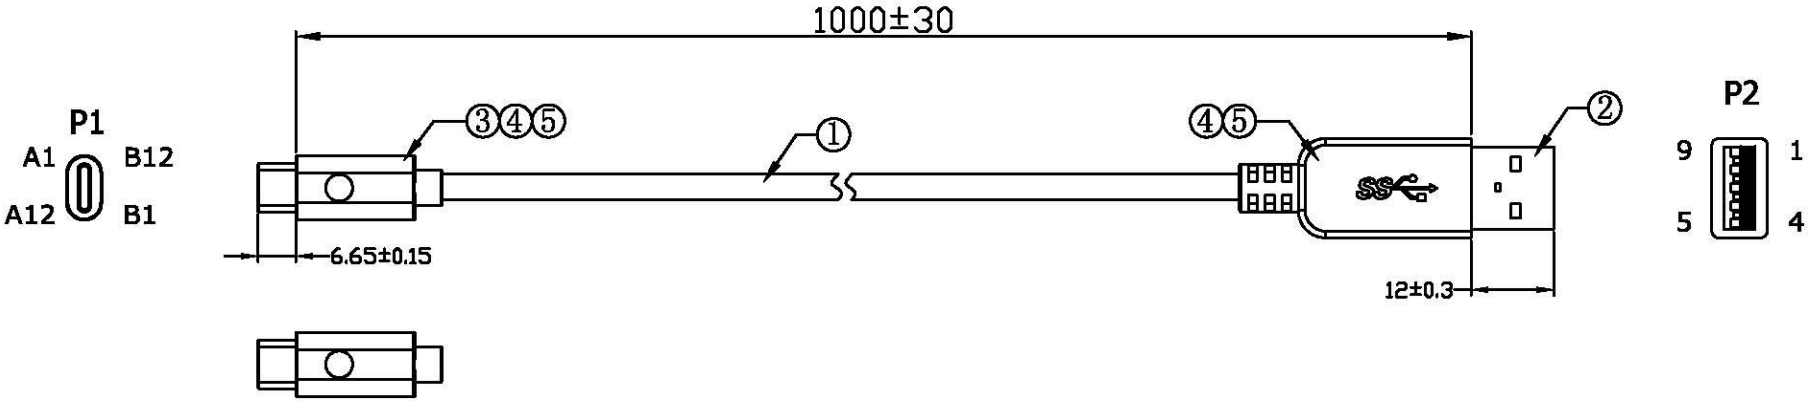


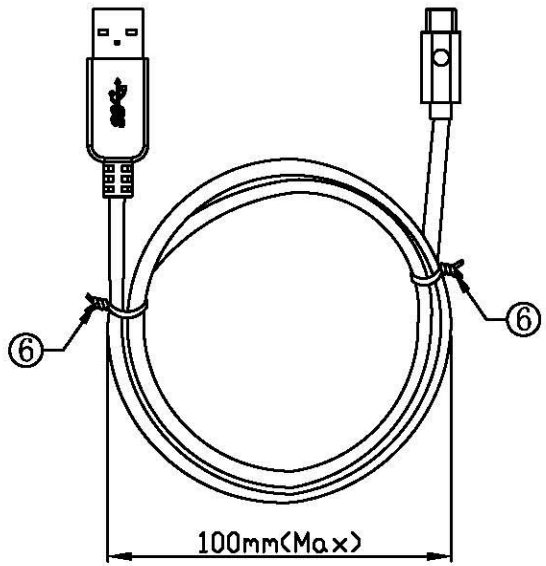

绕线图

PIN ASSIGNMENT

| TYPE C PLUG | | USB3.1 A/M | | COLOR (Ref) |
|---|---|---|---|---|
| PIN | Signal name | PIN | Signal name | |
| A1, B1, A12, B12 | GND | 4、7 | GND_DRAIN | Black |
| A4, B4, A9, B9 | VBUS | 1 | VBUS | Red |
| A5 | CC | | | |
| B5 | Vconn | | | |
| A6 | Dp1 | 3 | D+ | Green |
| A7 | Dn1 | 2 | D- | White |
| A2 | SSTXp1 | 6 | SSRX+ | Yellow |
| A3 | SSTXn1 | 5 | SSRX- | Blue |
| B11 | SSRXp1 | 9 | SSTX+ | Orange |
| B10 | SSRXn1 | 8 | SSTX- | Purple |
| SHELL | Shield | SHELL | Shield | braid |

TTest requirements:
A. 100% Points test can't dislocation
B. 100% test conduction Performance OK
(not short circuit, open circuit).

| ITEM | NAME | DESCRIPTION | Q'TY |
|---|---|---|---|
| 6 | 迷你带 | 透明迷你带,单凸面,有铁丝,W=2.35mm,L=100mm | 2PCS |
| 5 | PVC | 45P PVC(USB3.1 A/M外模+Type-C/M外模),颜色:黑色. | 15g |
| 4 | PE | PE料,低密度,透明白(USB3.1 AM内模+Type-C/M内模) | 10g |
| 3 | CONN. | TYPE C PLUG G/F With PCB(FOR USB A/M 3.1) | 1PC |
| 2 | CONN. | USB3.1 A/M Welding Line Three in one Blue | 1PC |
| 1 | Cable | USB3.1标准线24#32#32TX(镀锡铜)+(64编镀锡铜) OD:4.5±0.15(mm),外被:PVC 黑色 无印字. | 1PC |

**JKuano**
Jye Kuano Electric Wire & Cable Co., Ltd.

| | | |
|---|---|---|
| DWN | Sharp | 16.10.19 |
| CHK | | |
| APP | | |

DESCRIPTION
USB3.1 A/M TO USB3.1 Type-C/M Black Round Cable, Molding
Color:Black, L=1.0M

| | | | |
|---|---|---|---|
| PART NO | ZC3-1033-KH10-001 | C/N | |
| CUST P/N | | UNIT | mm |
| SCALE | | REV. | A0 |
| Tolerance | X.=±1 0.X=± 0.5 0.XX=± 0.05 / ± 1° | SHEET | 1/1 |