
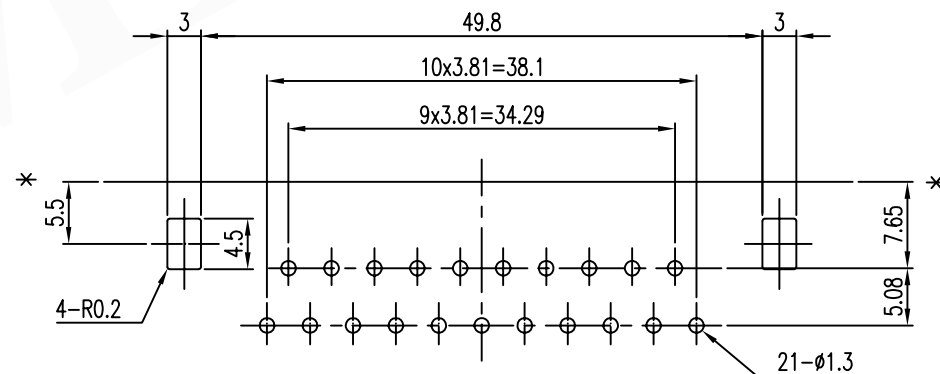


| REVISIONS | | | | |
|-----------|-------------|------|---------|----------|
| LTR | DESCRIPTION | DATE | REVISED | APPROVED |
| | | | | |

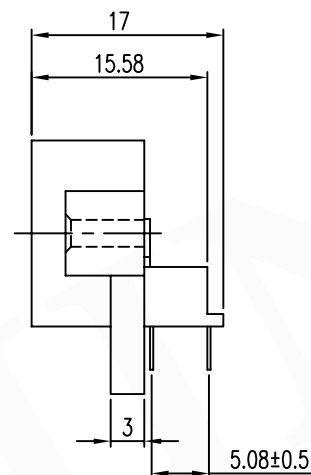

P.C.B Layout Dimension (Tolerance: ± 0.1)
 (Recommend min. Dimension) (Bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3 FRACTIONS:

ANGLES: ±5°

| | | | | |
|------------------------------|-----------|------|-----------------------|-----------------------|
| 2 | CONTACT | 21 | C2680R-H, t=0.4 | MBNi2-Sn3 |
| 1 | HOUSING | 1 | PPO, UL-94V-1 | BLACK |
| LTR | PART NAME | QTY | MATERIAL(THICK,COLOR) | REMARK |
| DWN | ALLAN | DATE | 2007.06.22 | SCALE / NAME |
| DSND | JOHNNY | DATE | 2005.10.12 | 3RD ANGLE PROJECTION |
| CHKD | BILL | DATE | 2007.06.22 | UNIT: mm |
| APVD | BILL | DATE | 2007.06.22 | NAME |
| KUNMING ELECTRONICS CO.,LTD. | | | | RGB CONNECTOR |
| DWN.NO. A-021VP-08 | | | | CAT. NO. HRC-021VP-08 |
| 1/1 | | | | A |