

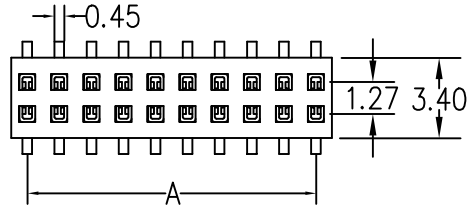


# 2162B2 FEMALE HEADER



1.27\*1.27 mm Dual Row/SMT Type

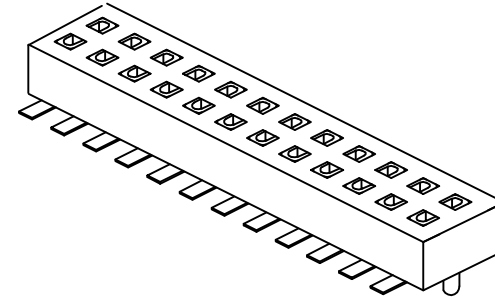

$A = 1.27 \times (\text{No. of Contacts} / 2 - 1)$   
 $B = 1.27 \times (\text{No. of Contacts} / 2 - 2)$   
 $C = 0.40 + 1.27 \times \text{No. of Positions}$



## P.C.B LAYOUT

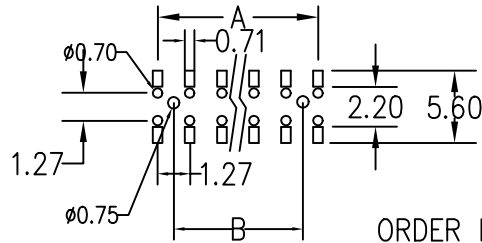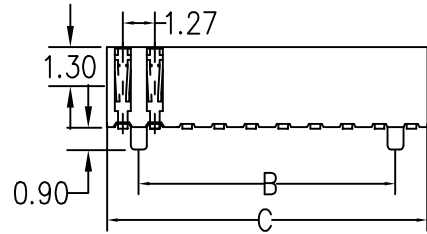



## ORDER INFORMATION:

2162B2 2X ?? -HS -D1 -G -0

- 0:W/O Locating Pegs
- 1:With Locating Pegs
- Contact Plating:G:Gold Fflash
- Height:D1:2.2mm
- HS:SMT Type
- No of Contacts 3~50

**SPECIFICATIONS**  
 CURRENT RATING:1AMP  
 INSULATOR RESISTANCE:5000MΩMIN  
 DIELECTRIC WITHSTANDING:AC 500V  
 OPERATING TEMPERATURE:-40°C-+105°C  
 MAX PROCESSING TEMP:230° for 30SECONDS  
 CONTACT MATERIAL:PHOSPHOR BRONZE OR BRONZE  
 INSULATOR MATERIAL:POLYESTER UL94V-0  
 NYLON-6T  
 FINISH:GOLD FLASH

 <b>易昕企業有限公司</b> LEAMAX ENTERPRISE CO., LTD.					
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO <b>2162B2</b>		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	90.09.04	UNIT MM	SHT 1 OF 1	SIZE A4
DGN	AMY	90.09.04			
DRW	SHIEH	90.09.04			