

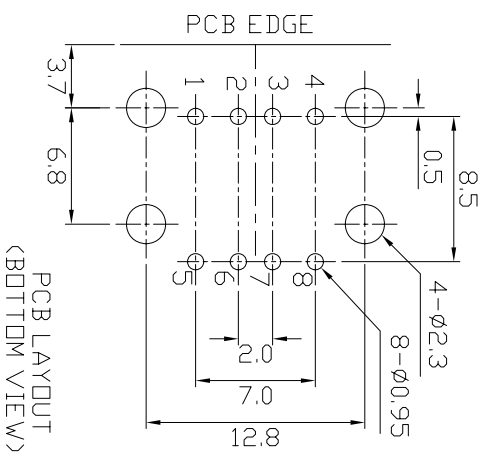
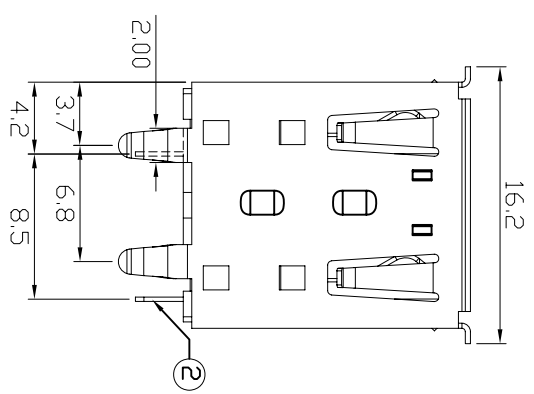


REV ZONE	REVISION	DATE

Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1).
 Durability (Life Test): 1500 Cycles.
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

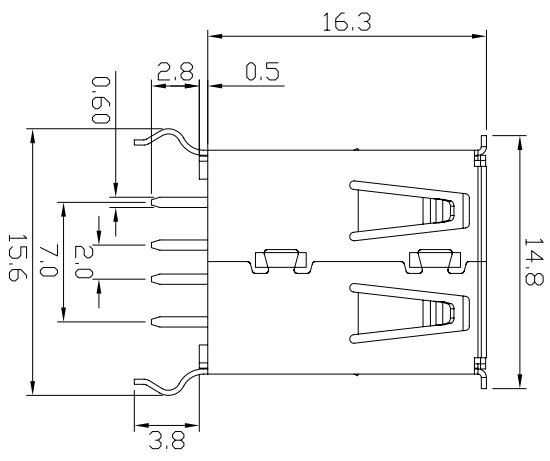

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	WHITE	1	
2	PIN TERM.	PHOS. BRONZE,T:0.25	GOLD-TIN PLATED	8	Gold1~3u", NI:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
4	SPRING CLIP	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
5	SPEACER	P.E.	NATURAL	2	

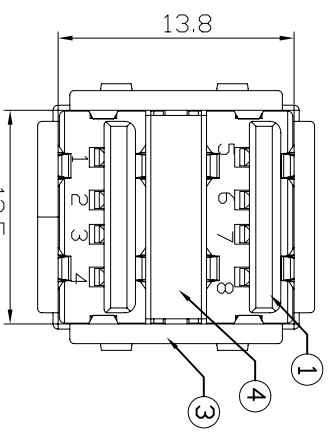

易昕企業有限公司
 LEAMAX ENTERPRISE CO., LTD.

Drawing No	UNIT	SCALE	TITLE
3212-005	mm	1:1	DUAL USB A TYPE VERTICAL 8 PIN DIP

APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.	REV.
JAMES 27-04-12	SHIRLEY 27-04-12	TINA 11-05-10	11-05-10	X. X. XX XXX ±0.38 ±0.25 ±0.13 ±0.05	3212-DKE-01UW	A0