


注：此產品所有材料均為RoHS材料。

REV.	DESCRIPTION	DATE	APP'D
A/0	RELEASE TO PRODUCTION	08.06.12	Ricky

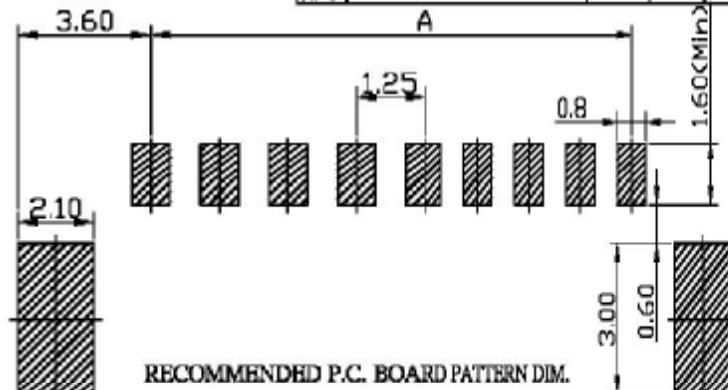

RECOMMENDED P.C. BOARD PATTERN DIM.

### SPECIFICATIONS

#### Electrical

Current Rating: 1A Max  
 Voltage Rating: 125V AC/DC  
 Operating Temp.: -40°C ~ +85°C  
 Insulation Resistance: 100MΩ/ min.  
 Dielectric Withstanding Voltage: 250V AC/ min.  
 Contact Resistance: 10mΩ/ Max.

#### Material

Wafer: High Temperature Plastic  
 PA46 UL94V-0  
 Pin: High Strength Brass With Tin Over  
 Nickel Plated.  
 Advise Work Condition: 240° MAX.(Peak Temp.)  
 3Sec. or less  
 Advise Work Time: 120sec.~150sec.

QTY.	A	B	C	D
2	1.25	3.05	4.25	7.65
3	2.50	4.30	5.50	8.90
4	3.75	5.55	6.75	10.15
5	5.00	6.80	8.00	11.40
6	6.25	8.05	9.25	12.65
7	7.50	9.30	10.50	13.90
8	8.75	10.56	11.75	15.15
9	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

TOLERANCE	APPROVALS	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD	
X ±0.25	DRWR Any Shen	08.06.12	PART NO. <b>4318SxxRE</b>	1.25mm Wire-to-Board Wafer SMT R/A
XX ±0.20	DWR James Chen	08.06.12		
XXX ±0.15	APP Any Shen	08.06.12		
XXXX ±0.05	UNITS:mm	SCALE:none		
ANGULA #3°	SIZE: A4	SHEET 1 OF 1		
UNLESS OTHERWISE SPECIFIED				