

REV	DESCRIPTION	DATE	NAME
A/0	Release To Production	2010.06.24	IVY

Specification

- 1.Current Rating: 3A AC/DC
- 2.Voltage Rating: 250V AC/DC
- 3.Insulation Resistance: 1000MΩ Minimum At DC 500V
- 4.Dielectric Withstanding Voltage: AC 1000V/Minute
- 5.Operating Temperature: -25°C~+85°C

Material:

1.Insulator: NYLON66 UL94V-2

Finish:




1.Insulator: RED

註：此產品原料均為RoHS材料

ORDER INFORMATION PART NUMBER

4326Z XX H E

RoHS Compliant
Housing
Number of Contact
02~12

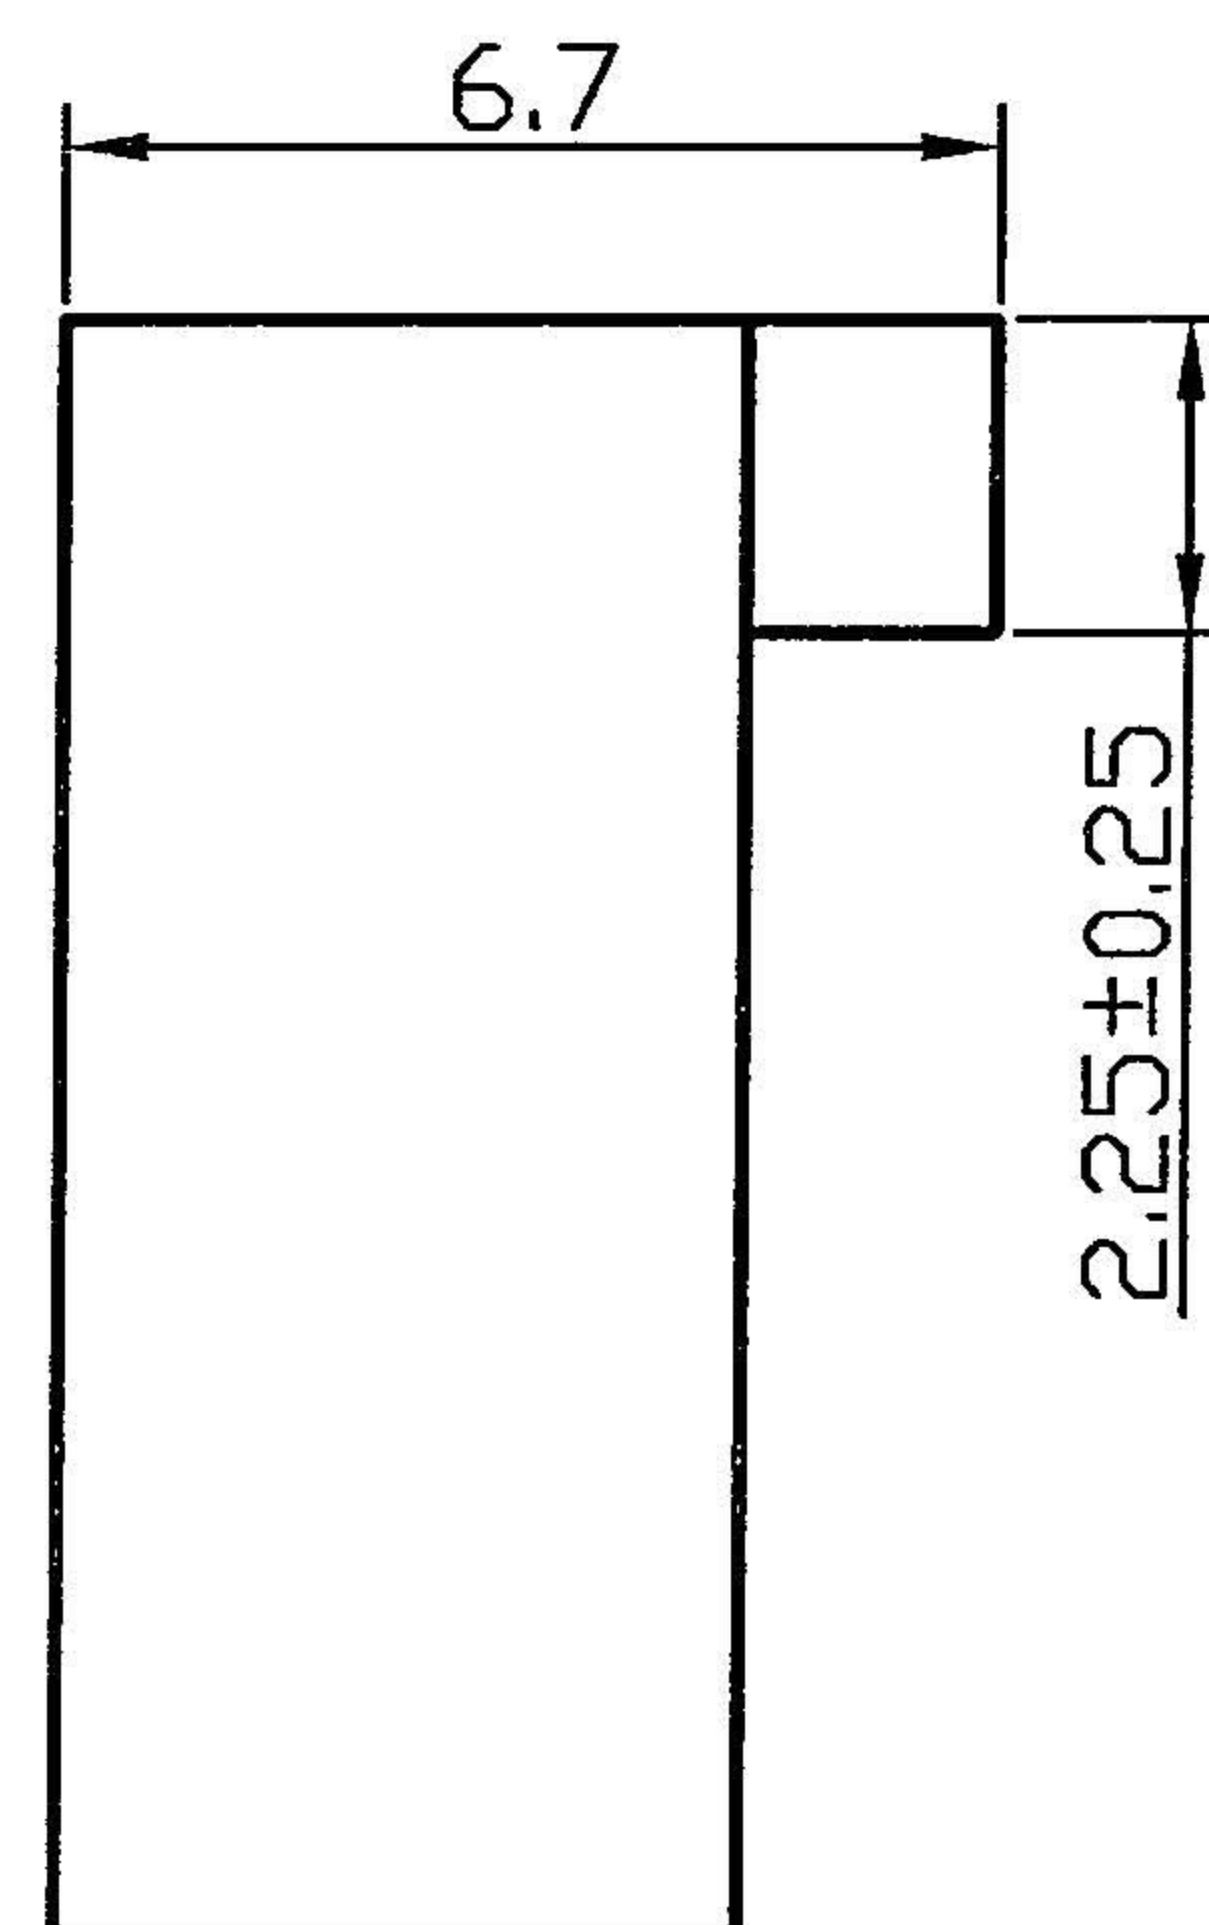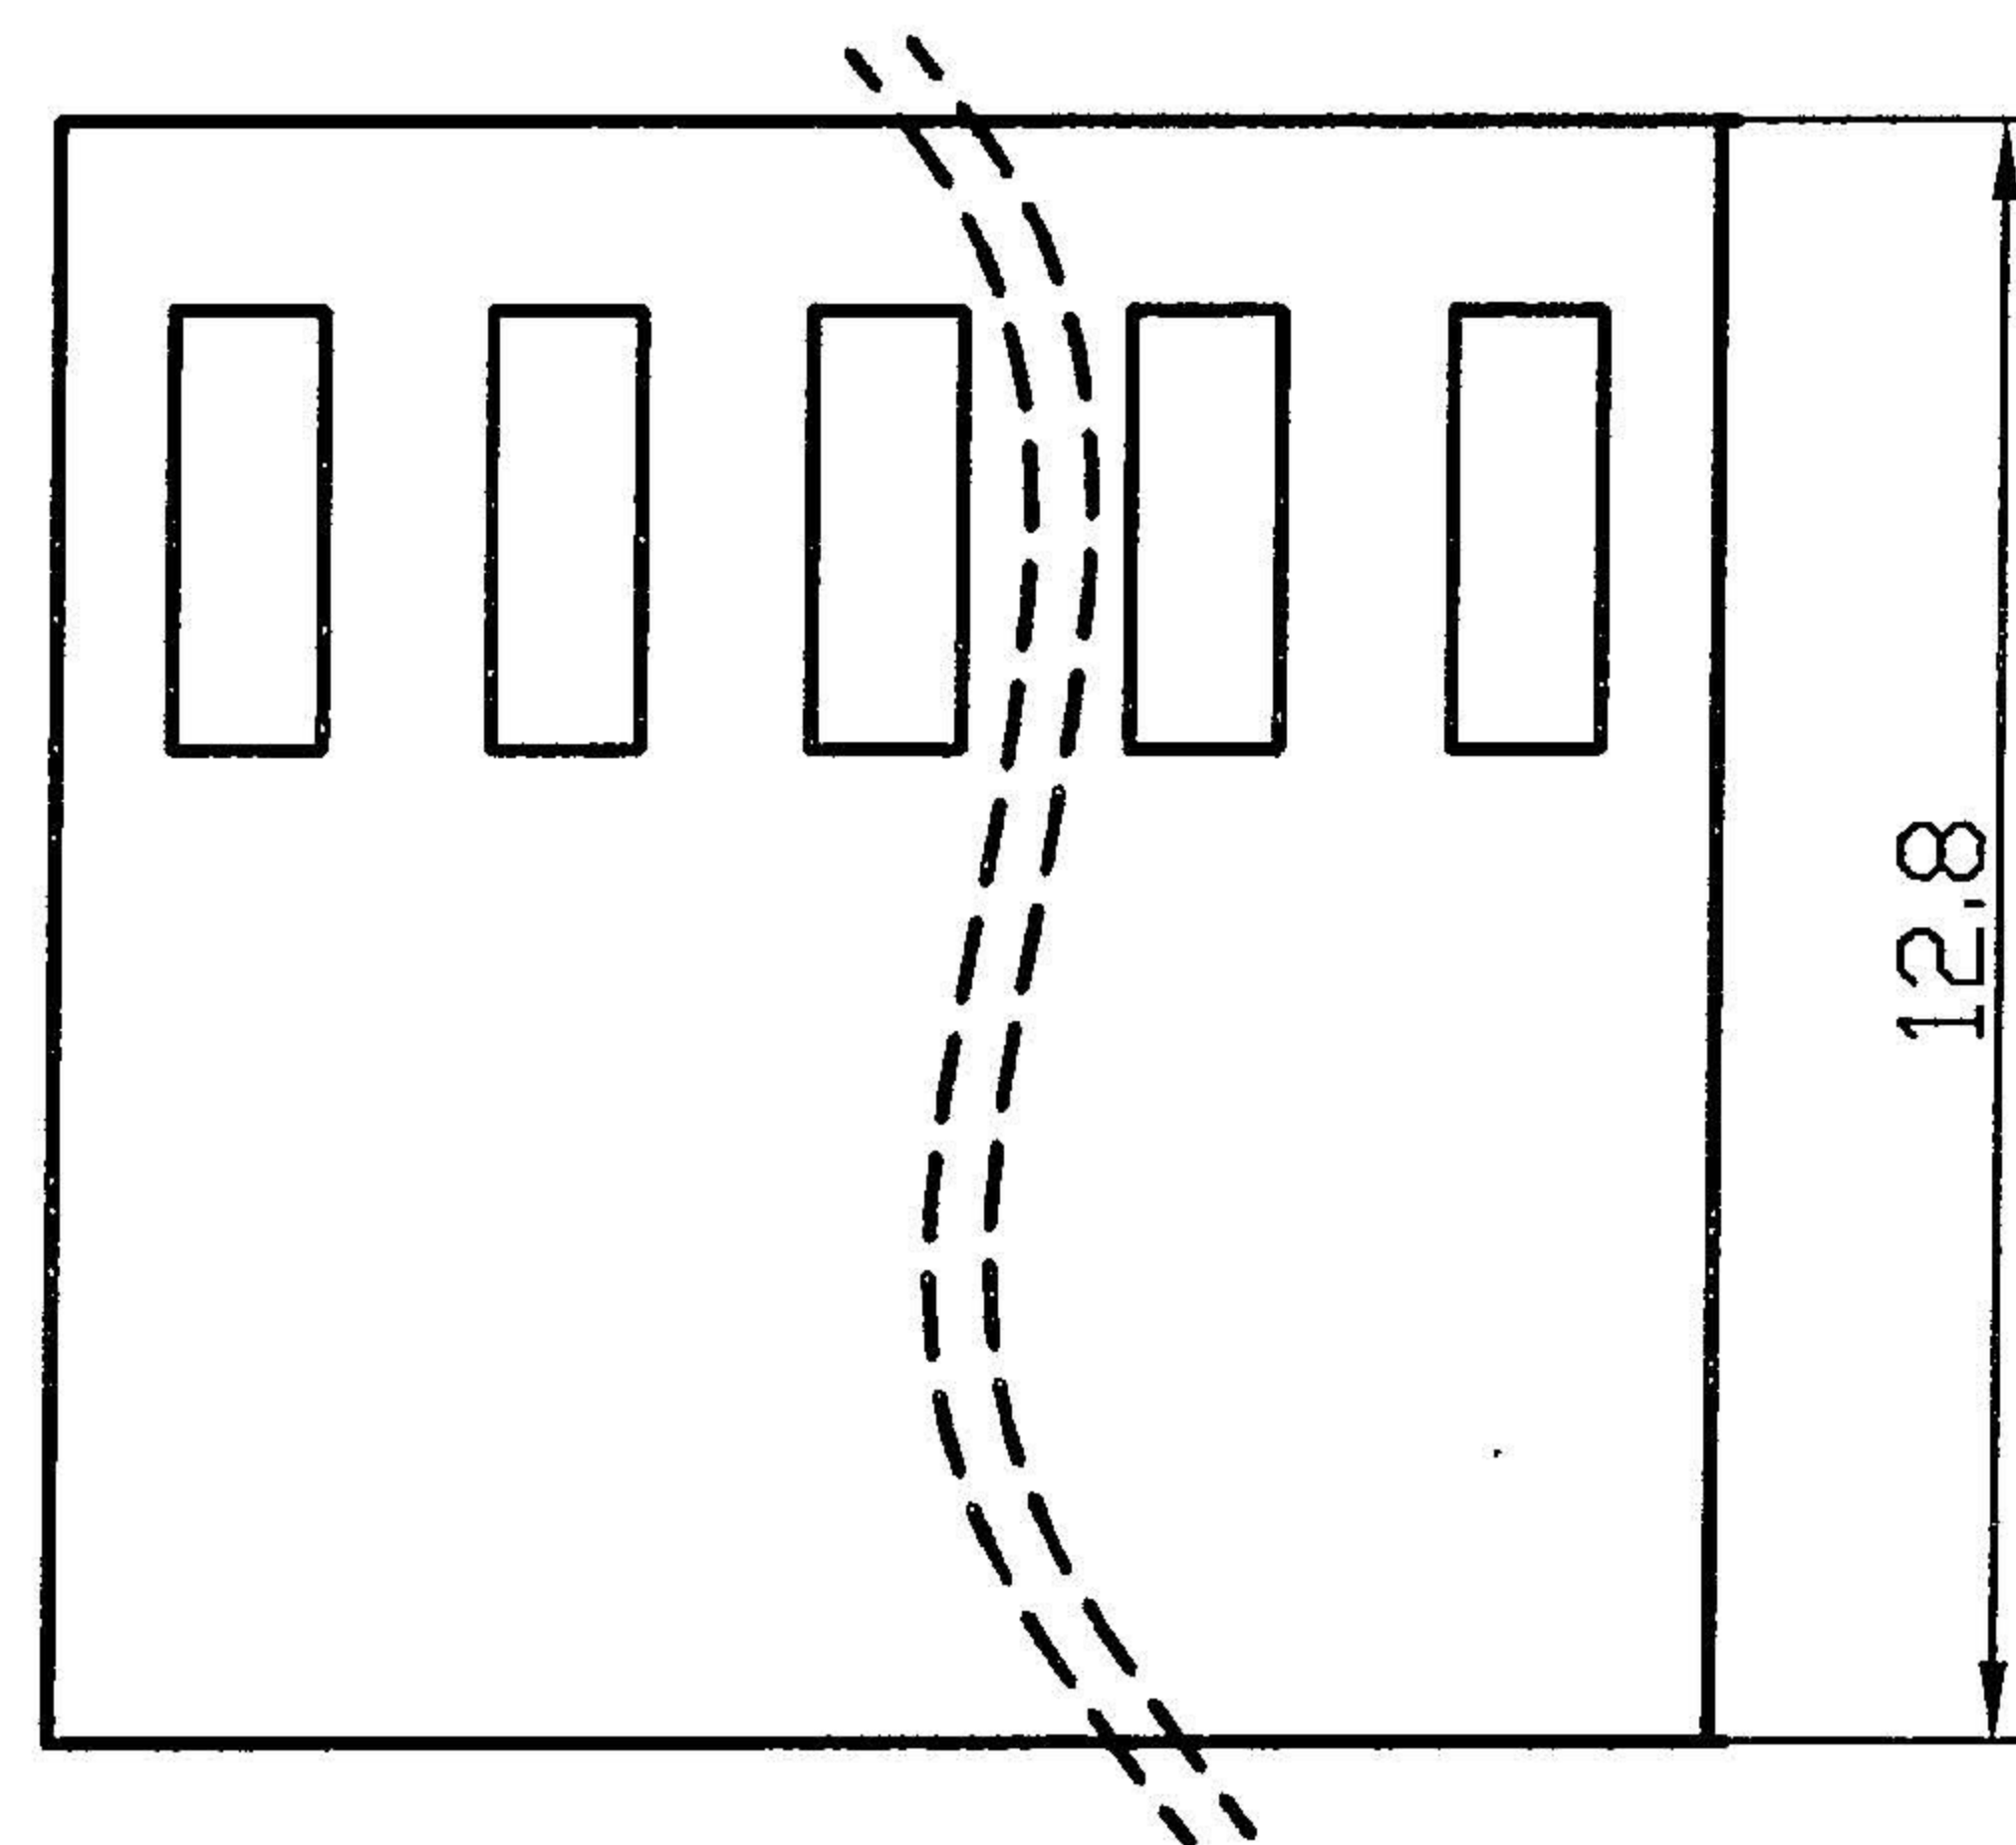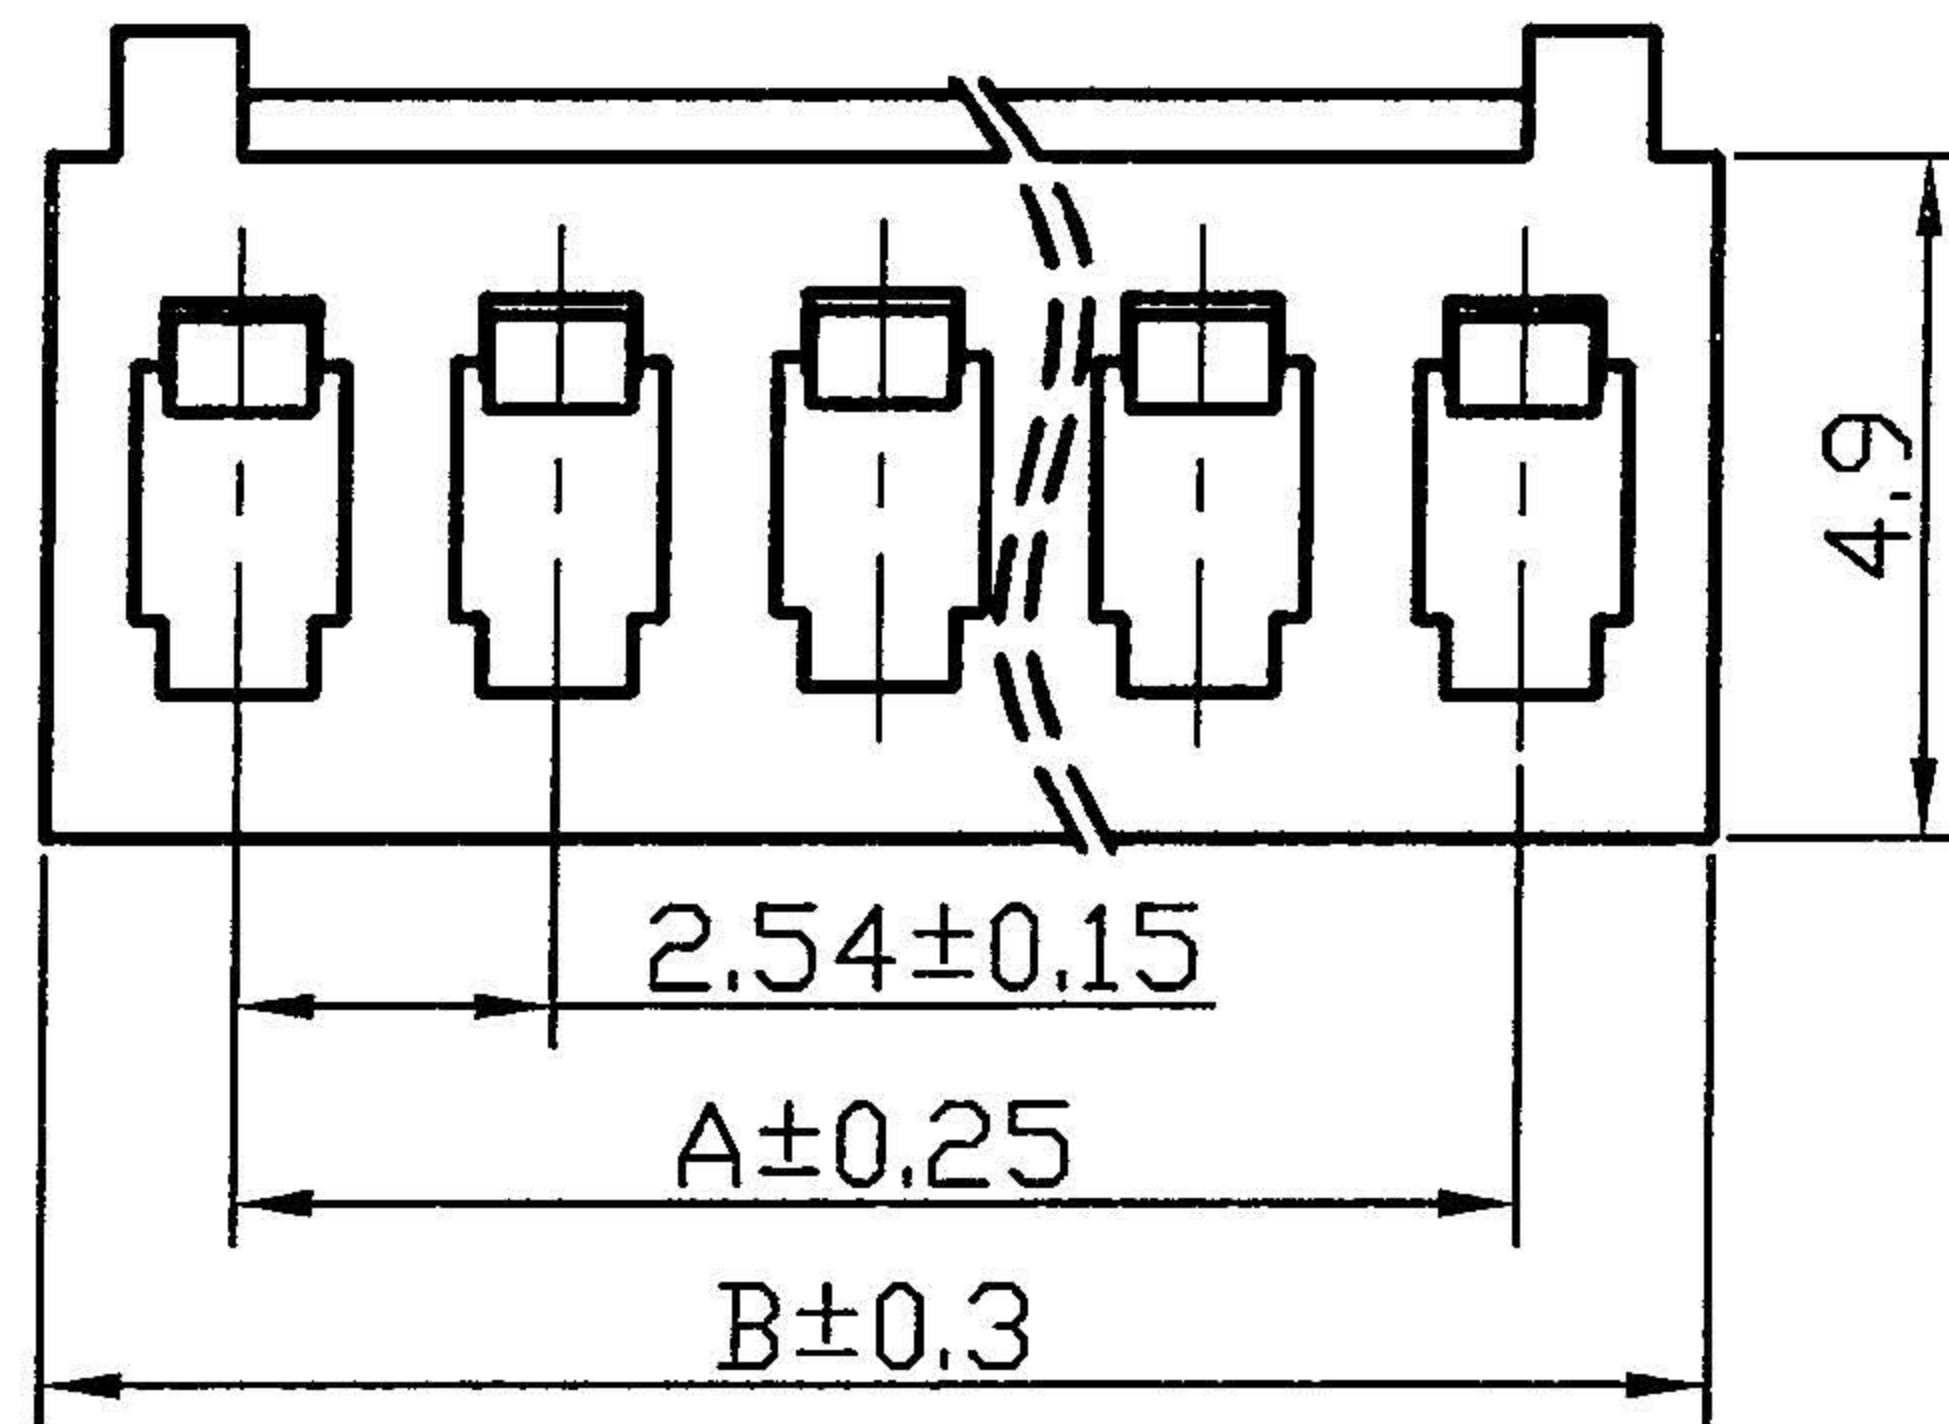

Poles	Dimension mm		Note.
	A	B	
2	2.54	5.65	
3	5.08	8.19	
4	7.62	10.73	
5	10.16	13.27	
6	12.70	15.81	
7	15.24	18.35	
8	17.78	20.89	
9	20.32	23.43	
10	22.86	25.97	
11	25.40	28.51	
12	27.94	31.05	

TOLERANCE		NAME	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD
X. ±0.35		IVY	2010.06.24	
X.X ±0.25	DRAWING 繪圖	ABEL	2010.06.24	TITLE / 品名:
X.XX ±0.15	CHECKED 審查	James	2011.08.24	Wire To Board Housing 2.54mm 短靠背
X.XXX ±0.05	APPROVE 核准			
ANGULA ±3°				
UNLESS OTHERWISE SPECIFIED	UNITS: mm	SCALE:	SIZE: A4	PART NO. 料號 4326ZxxHE