
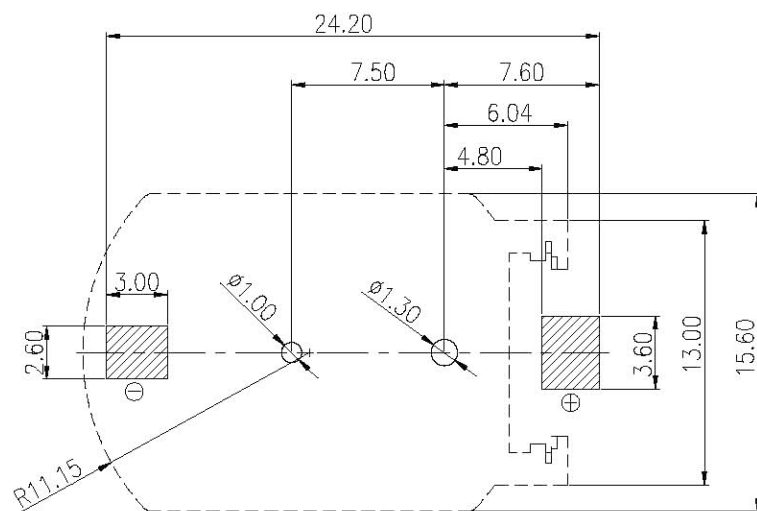
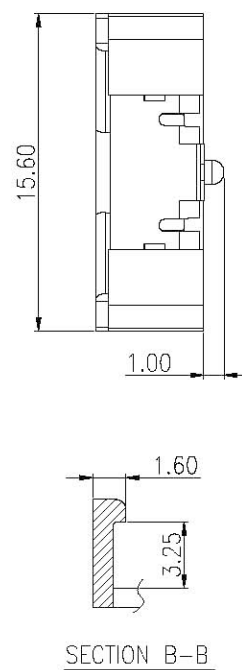


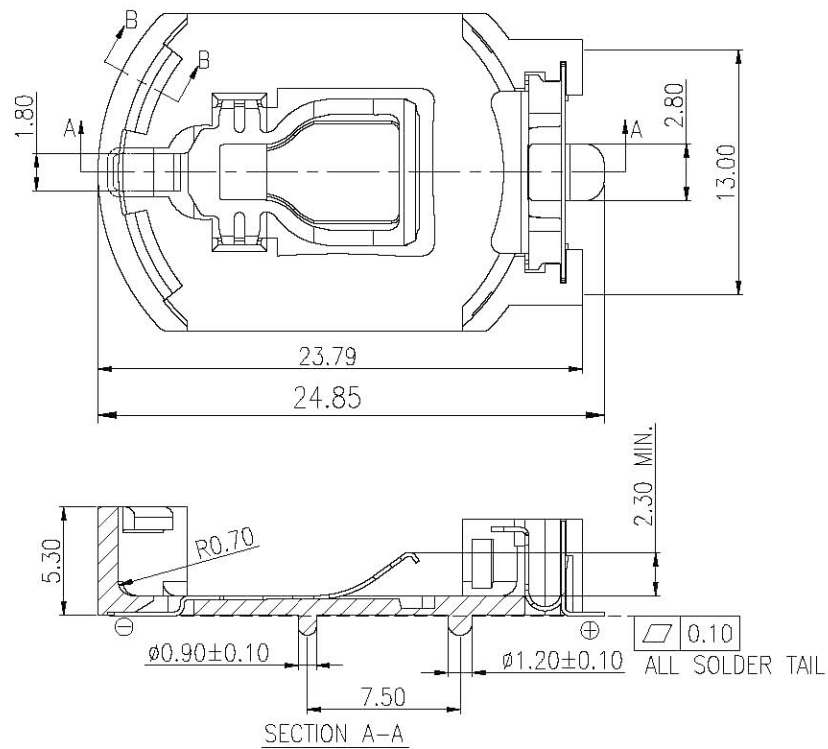

(PCB THICKNESS:T=1.60mm)(TOLERANCE:±0.05)

REV.	ECN NO./DESCRIPTION	DATE
3	N100298	6/22'10
4	N110103	3/25'11
5	N110290	6/16'11

NOTES:

1.MATERIAL:

HOUSING:PPS+40%GF,UL94V-0;COLOR:COFFEE(4975C).

CONTACT:PHOSPHOR BRONZE(C5191).

2.RECOMMENDED PCB THICKNESS:1.60±0.05mm.

3.FINISH:AU1U" PLATED;NI50U" MIN. UNDERPLATING.

4.ELECTRICAL PERFORMANCE:

4-1.LLCR:30mΩ MAX.

4-2.INSULATION RESISTANCE:1000MΩ MIN.

4-3.DIELECTRIC WITHSTAND VOLTAGE: 1000V AC FOR 1 MINUTE.

5.THE REFER SOLDERING CONDITIONS:

IR REFLOW:THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260+/-5°C.

6.RoHS COMPLIANT.

7.PRODUCT NUMBER NOTE:

4340-HSJ1E

GENERAL TOLERANCES UNLESS SPECIFIED			PART NO.		 易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD			
X± 0.35		X°± 3°	4340-HSJ1E					
XX± 0.25		X°± 2°	APPROVED BY			TITLE		
XXX± 0.15		XX°± 1°	James 2012. 06. 04			BATTERY HOLDER FOR CR2032		
CUSTOMER DRAWING			CHECKED BY			DWG NO. 4340-007		
			Huang 2012. 06. 04					
SIZE		UNITS	DRAWN BY					
A4		MM[INCH]	Jack_Fan 2011. 06. 16					
						SHEET		
						SCALE		
						REV		
						1 / 1		
						2:1		
						5		